



Roxtec SF EMC transit

Transit for EMC with metal frame and flange for welding.

The Roxtec SF EMC is a cable and pipe transit ensuring electromagnetic compatibility. The transit frame is available in different materials and with a single or various combinations of openings. The frame is produced in 10mm thick metal and has a flange to simplify welding to imprecise holes. There is a choice between Roxtec ES modules for electromagnetic shielding and PE modules that protect against conducted disturbances. The modules adapt to cables and pipes of different sizes and can be used to build in spare capacity in the seal. Roxtec EC (electrical continuity) test sticks are available to help indicate the electrical performance of the transit installation.

- ibility. S ducted be ticks
- Easy to maintain and inspect

 Provides built-in spare capacity

 Image: Structure of installation

 Structure of installation

 Metal

 Image: Structure of installation

 Image

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code
- H-CLASS according to IMO 2010 FTP Code + HC fire load curve
- Jet fire according to ISO 22899-1 and OTI 95634

Tightness

- Gas: 2.5 bar (catastrophic)
- Water: 4 bar (catastrophic)

Packing space

) IP 66/67

Supports

- Electromagnetic shielding
- Potential equalization

Aperture dimensions

Weight Art. no


Frame dimensions

Product

in/lbs

The frame variants below are a limited selection. For the full range of frames and configurations, please visit roxtec.com.

Frame openings




н	SF 6x1 ALU	1	4.724 x 7.087	WxHxD 10.256 x 14.094 x 2.362	w x h 7.913(+0.591/-0.591) x 11.732(+0.591/-0.591)	6.5	SFF600000131
	SF 6x2 ALU	2	4.724 x 7.087	15.394 x 14.094 x 2.362	13.071(+0.591/-0.591) x 11.732(+0.591/-0.591)	9.2	SFF600000231
	SF 6x3 ALU	3	4.724 x 7.087	20.531 x 14.094 x 2.362	18.189(+0.591/-0.591) x 11.732(+0.591/-0.591)	13.2	SFF600000331
	SF 6x1 PRIMED	1	4.724 x 7.087	10.256 x 14.094 x 2.362	7.913(+0.591/-0.591) x 11.732(+0.591/-0.591)	16.9	SFF6000000112
	SF 6x2 PRIMED	2	4.724 x 7.087	15.394 x 14.094 x 2.362	13.071(+0.591/-0.591) x 11.732(+0.591/-0.591)	26.6	SFF600000212
	SF 6x3 PRIMED	3	4.724 x 7.087	20.531 x 14.094 x 2.362	18.189(+0.591/-0.591) x 11.732(+0.591/-0.591)	36.3	SFF600000312
	SF 6x1 AISI316	1	4.724 x 7.087	10.256 x 14.094 x 2.362	7.913(+0.591/-0.591) x 11.732(+0.591/-0.591)	18.1	SFF600000121
	SF 6x2 AISI316	2	4.724 x 7.087	15.394 x 14.094 x 2.362	13.071(+0.591/-0.591) x 11.732(+0.591/-0.591)	26.9	SFF600000221
	SF 6x3 AISI316	3	4.724 x 7.087	20.531 x 14.094 x 2.362	18.189(+0.591/-0.591) x 11.732(+0.591/-0.591)	36.7	SFF6000000321

External dimensions





Sealing components

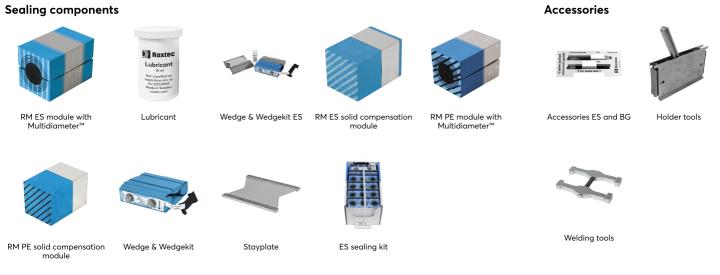

For detailed information, please visit roxtec.com.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for

Roxtec expressly excludes any implied warranties of mechantability and fitness for a particular purpose and lother express or implied representations and warranties provided by statute or

common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect,

consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from

https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/ We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-27