



配有 SLF RS 的 Roxtec RS 防爆密封系统

用于栓接安装的防爆级密封系统可密封单根电缆或管道。

配有 SLF RS 的 Roxtec RS Ex 是一种用于 Ex e 和 Ex tb 区域的密封系统。它带有金属套筒专用于密封单根电缆或管道。该密封系统由两半可剥离芯层组成可灵活适配各种规格的电缆和管道。其套筒栓接到结构上。



- 防啮齿动物
- 安装快速便捷

产品特性



耐火



水密



气密



防爆等级

安装结构



夹芯板



金属



石膏



混凝土

安装类型



栓接

等级和证书

火灾

- A 级符合 IMO 2010 FTP 规范
- E/EI 等级符合 EN 13501
- F/T 等级符合 UL 1479
- H 级符合 IMO 2010 FTP 规范 + HC 火灾荷载曲线
- 喷射火符合 ISO 22899-1 和 OTI 95634 标准

密封性


- 气体: 2.67 bar 洪灾
- 水: 4 bar 洪灾

支持


- 防爆等级

密封组件数据

密封组件



RS B ES Ex 套件



RS B PE Ex 套件




RS B 防爆套件

如需了解详细信息请访问 [roxtec.com](https://www.roxtec.com)。



预装配的穿隔套件

mm/kg

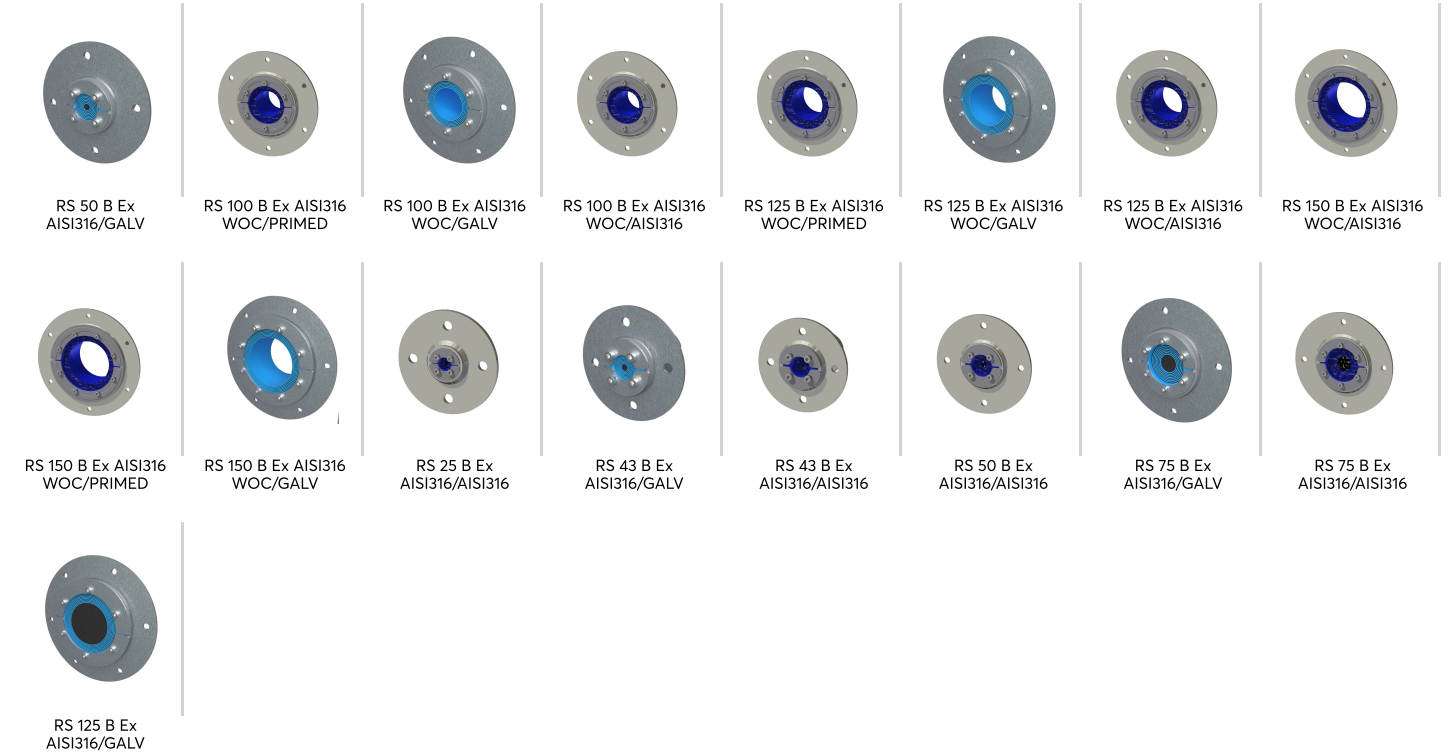

标题	配置	开孔尺寸 Ø	重量	产品编号
RS 50 B Ex AISI316/GALV		65 - 65	1.4	101918
RS 125 B Ex AISI316/AISI316		142 - 142	3.9	163616
RS 100 B Ex AISI316 WOC/PRIMED	1x (48.0-70.0)	116 - 116	2.9	EXRSB0100102112
RS 100 B Ex AISI316 WOC/GALV		116 - 116	2.9	EXRSB0100102118
RS 100 B Ex AISI316 WOC/AISI316	1x (48.0-70.0)	116 - 116	2.7	EXRSB0100102121
RS 125 B Ex AISI316 WOC/PRIMED	1x (66.0-98.0)	142 - 142	3.4	EXRSB0125102112
RS 125 B Ex AISI316 WOC/GALV		142 - 142	3.6	EXRSB0125102118
RS 125 B Ex AISI316 WOC/AISI316	1x (66.0-98.0)	142 - 142	3.6	EXRSB0125102121
RS 150 B Ex AISI316 WOC/AISI316	1x (93.0-119.0)	166 - 166	4.1	EXRSB0150002121
RS 150 B Ex AISI316 WOC/PRIMED	1x (93.0-119.0)	166 - 166	4.2	EXRSB0150102112
RS 150 B Ex AISI316 WOC/GALV		166 - 166	4.5	EXRSB0150102118
RS 25 B Ex AISI316/GALV		36 - 36	0.43	EXRSB0250002118
RS 25 B Ex AISI316/AISI316	1x (3.6-12.0)		0.48	EXRSB0250002121
RS 43 B Ex AISI316/GALV		54 - 54	0.9	EXRSB0430002118
RS 43 B Ex AISI316/AISI316	1x (4.0-23.0)	54 - 54	0.9	EXRSB0430002121
RS 50 B Ex AISI316/AISI316	1x (8.0-30.0)	65 - 65	1.4	EXRSB0500002121
RS 75 B Ex AISI316/GALV		91 - 91	2	EXRSB0750002118
RS 75 B Ex AISI316/AISI316	1x (24.0-54.0)	91 - 91	2.1	EXRSB0750002121
RS 100 B Ex AISI316/GALV		116 - 116	3	EXRSB1000002118
RS 100 B Ex AISI316/AISI316		116 - 116	4.4	EXRSB1000002121
RS 125 B Ex AISI316/GALV		142 - 142	4.3	EXRSB1250002118



The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-19