




Roxtec G Ex 貫通部 (溶接タイプ)

構造溶接用フランジ付き防爆対応貫通部。

Roxtec G 溶接用 Exは、密集する配線に適した貫通部です。Ex e および Ex tb の認証を受けていて、-60~+80°Cの温度範囲内で使用可能です。フレームは溶接で取付けます。

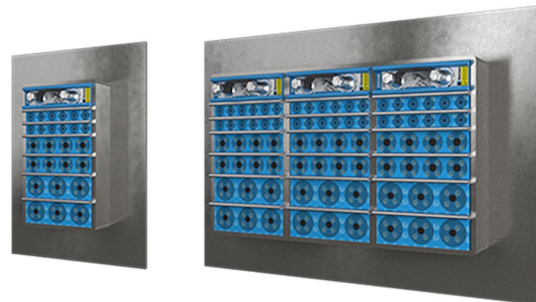

製品特性



IP/UL NEMA



防爆

設置構造



金属

取り付けタイプ



溶接

規格と認証証明書

密性

● IP 66/67

サポート

● 防爆

フレーム寸法

mm/kg

以下のフレームは一部です。フレームと構成品の全ラインナップについては、[roxtec.com](https://www.roxtec.com) をご覧ください。

	タイトル	フレームの開口部	パッキンスペース	外径 WxHxD	開口部寸法 w x h	重量	部品番号
	G 6x1 W Ex PRIMED	1	120 x 180	252.5 x 350 x 60	201(+15/-15) x 298(+15/-15)	4.8	159116
	G 6x2 W Ex PRIMED	2	120 x 180	383 x 350 x 60	331(+15/-15) x 298(+15/-15)	7.5	163091
	G 6x3 W Ex PRIMED	3	120 x 180	513.5 x 350 x 60	462(+15/-15) x 298(+15/-15)	3	163092
	G 6x1 W Ex AISI316	1	120 x 180	252.5 x 350 x 60	201(+15/-15) x 298(+15/-15)	4.8	125163
	G 6x2 W Ex AISI316	2	120 x 180	383 x 350 x 60	331(+15/-15) x 298(+15/-15)	7.3	105258
	G 6x3 W Ex AISI316	3	120 x 180	513.5 x 350 x 60	462(+15/-15) x 298(+15/-15)	9.9	109887



シーリングコンポーネントのデータ


シーリングコンポーネント



潤滑剤



ウェッジおよびウェット



Multidiameter™ 付き RM



RM Ex ソリッド
コンペンセーションモ



ステープレート Ex



溶接用ツール

付属品



Ex シーリングキット

詳細情報については、[roxtec.com](https://www.roxtec.com) をご覧ください。

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-23