




Moldura Ex Roxtec G soldada

Passagem de cabos com classificação Ex com flange, para soldagem em estruturas.

O Roxtec G soldado Ex é um cabo de passagem de alta densidade classificado para áreas Ex e e Ex tb em temperaturas de -60 a +80 °C. A estrutura é fixada por soldagem.

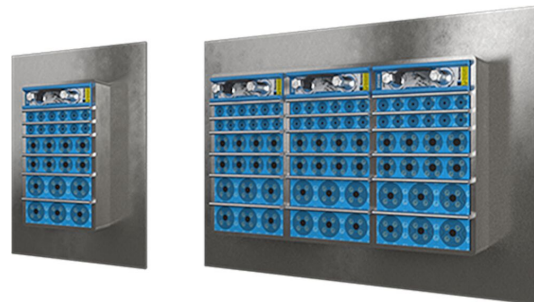

Características do produto



IP/UL NEMA



Certificado Ex

Estrutura da instalação



Metal

Tipo de montagem



Solda

Classificações e certificados

Proteção contra vazamento

IP 66/67


Suporta

Certificado Ex

Dimensões da moldura

mm/kg

As variantes de molduras abaixo são uma seleção limitada. Para a gama completa de molduras e configurações, acesse [roxtec.com](https://www.roxtec.com).

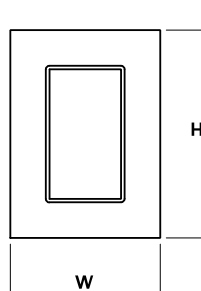	Título	Aberturas da moldura	Espaço de montagem	Dimensões externas WxHxD	Dimensões da abertura w x h	Peso	Art. No.
	G 6x1 W Ex PRIMED	1	120 x 180	252.5 x 350 x 60	201(+15/-15) x 298(+15/-15)	4.8	159116
	G 6x2 W Ex PRIMED	2	120 x 180	383 x 350 x 60	331(+15/-15) x 298(+15/-15)	7.5	163091
	G 6x3 W Ex PRIMED	3	120 x 180	513.5 x 350 x 60	462(+15/-15) x 298(+15/-15)	3	163092
	G 6x1 W Ex AISI316	1	120 x 180	252.5 x 350 x 60	201(+15/-15) x 298(+15/-15)	4.8	125163
	G 6x2 W Ex AISI316	2	120 x 180	383 x 350 x 60	331(+15/-15) x 298(+15/-15)	7.3	105258
	G 6x3 W Ex AISI316	3	120 x 180	513.5 x 350 x 60	462(+15/-15) x 298(+15/-15)	9.9	109887



Dados de componente de vedação

Componentes de vedação




Lubrificante Roxtec



Cunha e Kit de Cunhas Ex



Módulo de compensação
sólida RM Ex



Módulo RM Ex com
Multidiameter™



Placa de separação Ex



Ferramentas de
soldagem da Roxtec



Kit de vedação Ex

Para obter informações detalhadas, acesse [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-25