




Roxtec G Ex-genomföring för svetsning

Ex-klassad genomföring med fläns, som svetsas fast i strukturen.

Roxtec G Ex för svetsning är en genomföring för hög kabeldensitet som är klassad för Ex e- och Ex tb-områden i temperaturer från -60 till +80°C. Ramen fästs genom svetsning.

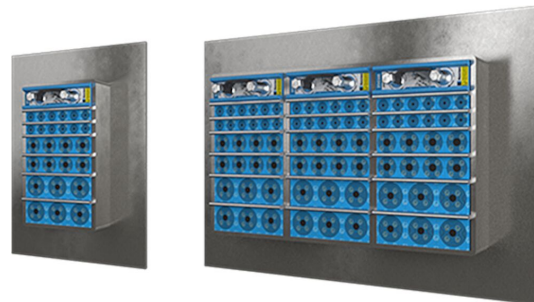

Produktegenskaper



IP/UL NEMA



Ex-klassad

Konstruktion för installation



Metall

Monteringsätt



Svetsning

Klassningar & certifikat

Täthet

IP 66/67


Stödjer

Ex-klassad

Ramdimensioner

mm/kg

Ramvarianterna nedan är ett begränsat urval. Du hittar hela utbudet av ramar och konfigurationer på [roxtec.com](https://www.roxtec.com).

	Titel	Ramöppningar	Packningsutrymme	Ytermått W x H x D	Öppningens mått w x h	Vikt	Art. nr
	G 6x1 W Ex PRIMED	1	120 x 180	252.5 x 350 x 60	201(+15/-15) x 298(+15/-15)	4.8	159116
	G 6x2 W Ex PRIMED	2	120 x 180	383 x 350 x 60	331(+15/-15) x 298(+15/-15)	7.5	163091
	G 6x3 W Ex PRIMED	3	120 x 180	513.5 x 350 x 60	462(+15/-15) x 298(+15/-15)	3	163092
	G 6x1 W Ex AISI316	1	120 x 180	252.5 x 350 x 60	201(+15/-15) x 298(+15/-15)	4.8	125163
	G 6x2 W Ex AISI316	2	120 x 180	383 x 350 x 60	331(+15/-15) x 298(+15/-15)	7.3	105258
	G 6x3 W Ex AISI316	3	120 x 180	513.5 x 350 x 60	462(+15/-15) x 298(+15/-15)	9.9	109887



Information om tätningsskomponenter

Tätningsskomponenter




smörjmedel



Ex Wedge och Wedgekit



RM Ex solid kompensationsmodul



RM Ex-modul med Multidiameter™



Ex-stagbricka



svetsverktyg



Ex-tätningsskit

Detaljerad information finns på [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-25