




Těsnění Roxtec H3+1 UG™

Průchod pro kabely procházející skrze základy

Těsnění Roxtec H3 + 1 UG™, které je ideální pro silové kabely v tří vodičovém uspořádání doplněném zemním kabelem, prochází základy a funguje zde jako dlouhodobá zábrana proti zaplavení, plynům, vlhkosti a hlodavcům. Jedná se o čtyřdílné těsnění, které se snadno instaluje i za vlhka a v prostředích s protékající vodou. Průchod odolává extrémnímu ohýbání kabelů a má toleranci +3 mm vzhledem k otvoru i ukazatel signalizující požadovanou kompresi těsnění. Těsnění lze instalovat do vyřazecích objímk, průchodek nebo jádrových vrtů.

- Odolné proti hlodavcům
- Rychlá a snadná instalace
- Poskytuje vynikající mechanické ukotvení kabelu

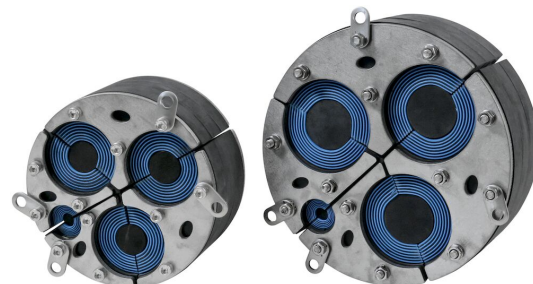

Vlastnosti výrobku



Vodotěsné



Plynotěsné



IP/UL NEMA

Struktura instalace



Beton

Typ montáže



Stávající otvor



Stávající objímka

Specifikace a certifikáty

Těsnost

- Plynotěsnost: 0,3 baru (konstantní)
- Vodotěsnost: 0,3 baru (konstantní)
- IP 68

Údaje o izolačních komponentách

Těsnící komponenty



Těsnění H3+1 UG™




Mazivo Roxtec

Podrobné informace najdete na stránkách www.roxtec.com.




Konfigurované soupravy prostupů

mm/kg



H3+1 150 UG



H3+1 200 UG

Název	Konfigurace	Rozměry otvoru Ø	Hmotnost Typ. č.
H3+1 150 UG	4x (10.0-53.0)	150 - 153	2.6 192261
H3+1 200 UG	4x (10.0-68.0)	200 - 203	4.2 192082

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-18