




Roxtecs H3+1 UG™-tætning

Gennemføring til kabler, der indføres gennem fundamenter

Roxtecs H3+1 UG™-tætning er ideel til forsyningsskabler i en kløverbladsformation plus en jordleder, der føres ind i fundamenter - tætningen fungerer som en langtidsholdbar barriere mod vand, gas, og gnavere. Det er en firedele tætning, der er nem at montere, selv i våde omgivelser og miljøer med rindende vand. Gennemføringen kan tåle ekstrem kabelbøjning, har en måltolerance på +3 mm mod åbningen, og er forsynet med en indikator, som viser, når tætningen er komprimeret. Tætningen kan monteres i knock-out-sleeves, trækrør og kerneborede huller.

- Gnaverbestandig
- Hurtig og nem at montere
- Holder kablerne sikkert fast

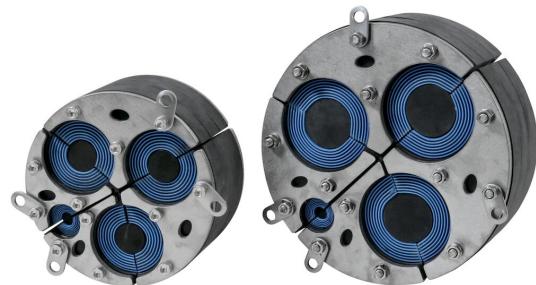

Produktgenskaber



Vandtæt Gastæt IP



IP/UL NEMA

Byggekonstruktion



Beton

Monteringstype



Eksisterende åbning



Oprindeligt sleeve

Normeringer og certifikater

Tæthed

- Gas: 0,3 bar (konstant)
- Vand: 0,3 bar (konstant)
- IP 68

Data om tætningskomponenter

Tætningskomponenter



Roxtecs H3+1 UG™-tætning



Lubrikant

For mere information, besøg venligst [roxtec.com](https://www.roxtec.com).



Foreslæde tætningskit

mm/kg



H3+1 150 UG



H3+1 200 UG

Title	Konfiguration	Åbningsmål Ø	Vægt	Art.-nr.
H3+1 150 UG	4x (10.0-53.0)	150 - 153	2	192261
H3+1 200 UG	4x (10.0-68.0)	200 - 203	4.2	192082

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-03-22