Roxtec

Erfahren Sie mehr über die Lösung auf roxtec.com.
https://www.roxtec.com/linktransit/de/solution/35712

Roxtec H3 UG™-Dichtung

Durchführung für Kabel, die durch Fundamente eingeführt werden.

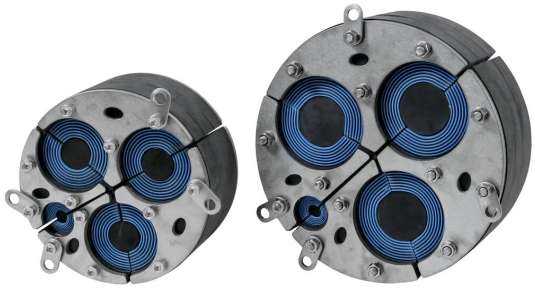

Die Roxtec H3 + 1 UG™-Dichtung ist ideal für Stromkabel in Dreiecksanordnung geeignet sowie für Erdungskabel, die direkt in das Fundament eingeführt werden und als dauerhafte Barriere gegen Überschwemmungen, Gas, Feuchtigkeit und Nagetiere fungieren. Es handelt sich um eine vierteilige Dichtung, die auch unter feuchten Bedingungen und in Umgebungen mit fließendem Wasser einfach zu installieren ist. Die Durchführung hält einer extremen Biegebeanspruchung stand und hat eine Toleranz von +3 mm gegenüber der Öffnung. Sie ist gleichzeitig ein Indikator der anzeigt, wenn die Abdichtung vollständig verpresst ist. Die Dichtung kann in ausschlagbaren Mantelrohren, Leerrohre oder Kernbohrungen montiert werden.

- Beständig gegen Nagetierverbiss
- Schnelle und einfache Installation
- Bietet ausgezeichneten Kabelhalt

Produkteigenschaften

Wasserdicht
Gasdicht
IP/UL NEMA

Aufbau der Installation

Beton

Montagetyp

Bestehende Öffnung
Vorhandenes Mantelrohr

Klassifizierungen und Zertifikate

Dichtigkeit

- Gas: 0,3 Bar (konstant)
- Wasser: 0,3 bar (konstant)
- IP 68

Daten der Abdichtungskomponenten

Dichtkomponenten

Gleitmittel

H3 UG™-Dichtung

Weitere Informationen finden Sie unter www.roxtec.com.

Vorkonfigurierte Durchführungs-Kits

mm/kg



H3+1 150 UG



H3+1 200 UG

Title	Konfiguration	Öffnungsmaße Ø	Gewicht	Art. Nr.
H3+1 150 UG	4x (10.0-53.0)	150 - 153	2.6	192261
H3+1 200 UG	4x (10.0-68.0)	200 - 203	4.2	192082

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.
Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.
Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.
The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/
We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.
This document was generated on: 2024-04-27