




Roxtec H3+1 UG™ - tiiviste

Läpivienti kaapeleille, jotka kulkevat perustusten kautta

Roxtec H3+1 UG™ -tiiviste sopii erinomaisesti kolmion muotoon asennettaville, perustusten kautta kulkeville virtakaapeleille ja maadoituskaapelille. Se antaa kestävän suojan tulvimisen, kaasun, kosteuden ja jyrssiöiden varalle. Neliosainen tiiviste on helppo asentaa kosteissa sekä juoksevan veden olosuhteissa. Läpivienti sietää kaapelien merkittävääkin taivutusta hyvin. Siinä on +3 mm:n toleranssi aukolle sekä ilmaisin, joka osoittaa, kun tiivisteeseen puristus on saavutettu. Tiiviste voidaan asentaa KOS-valuohukkeihin, suojaputkiin ja timanttikorattuihin reikiin.

- Jyrssiäsuojattu
- Helppo ja nopea asennus
- Erinomainen kaapelin vedonpoisto

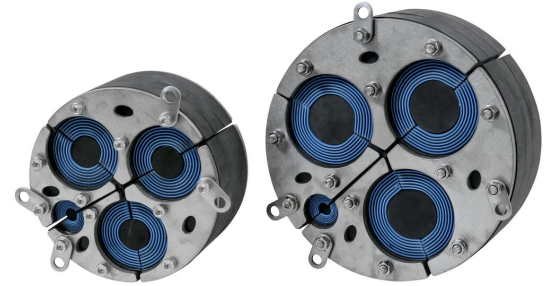

Tuotteen ominaisuudet



Vesitiivis



Kaasutiivis



IP/UL NEMA

Asennusrakenne



Betoni

Asennustyyppi



Olemassa oleva reikä



Olemassa oleva holkki

Luokitukset ja sertifiointit

Tiiviyys

- Kaasutiiviyys: 0,3 bar (jatkuva)
- Vesitiiviyys: 0,3 bar (jatkuva)
- IP 68

Tiivistyskomponenttien tiedot

Tiivistyskomponentit



H3+1 UG™ -tiiviste




Roxtec-asennusrasva

Lisätietoja on osoitteessa [roxtec.com](https://www.roxtec.com).




Valmiiksi määritetyt läpivientisarjat

mm/kg



H3+1 150 UG



H3+1 200 UG

Otsikko	Kokoonpano	Aukon mitat Ø	Paino	Tuotenro
H3+1 150 UG	4x (10.0-53.0)	150 - 153	2.6	192261
H3+1 200 UG	4x (10.0-68.0)	200 - 203	4.2	192082

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-18