




Sistema di sigillatura Roxtec H3+1 UG™

Passaggio per cavi che attraversano le fondamenta

Il sistema di sigillatura Roxtec H3+ 1 UG™ è ideale per i cavi di alimentazione in formazione a trifoglio più un cavo di messa a terra che entra nelle fondamenta e funge da barriera di lunga durata contro allagamenti, gas, umidità e roditori. Si tratta di un sistema di sigillatura composto da quattro parti, semplice da installare anche in condizioni di umidità ed in ambienti con acqua corrente. Il passaggio resiste ad un'estrema flessione del cavo, vanta una tolleranza di oltre 3 mm e dispone di un indicatore per il raggiungimento della sigillatura ottimale. Il sistema di sigillatura può essere installato in manicotti a frattura prestabilita, condotti o fori carotati.

- Previene l'ingresso di roditori
- Veloce e facile da installare
- Consente un'ottima conservazione del cavo

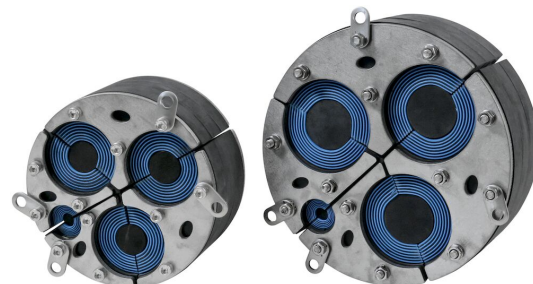

Caratteristiche



A tenuta stagna



A tenuta di gas



IP/UL NEMA

Struttura dell'installazione



Cemento

Tipo di montaggio



Foro esistente



Manicotto esistente

Ratings e certificati

Tenuta

- Gas: 0,3 bar (costante)
- Acqua: 0,3 bar (costante)
- IP 68

Dati relativi ai componenti

Componenti per la sigillatura



H3+1 UG™




Lubrificante

Per informazioni dettagliate, visita la pagina [roxtec.com](https://www.roxtec.com).




Kit pre-configurati


mm/kg




H3+1 150 UG



H3+1 200 UG



H3+1 153 (6") UG



H3+1 201 (8") UG

Titolo	Configurazione	Dimensioni apertura Ø	Peso	Art. Nr.
H3+1 150 UG	4x (10.0-53.0)	150 - 153	2.6	192261
H3+1 200 UG	4x (10.0-68.0)	200 - 203	4.2	192082
H3+1 153 (6") UG	4x (10.0-53.0)	152.5 - 155.5	2.6	224524
H3+1 201 (8") UG	4x (10.0-68.0)	201 - 204	4.7	224542

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-18