




Roxtec H3+1 UG™-tetning

Gjennomføring for kabler som føres inn via fundament

Roxtec H3+1 UG™-tetning er perfekt til strømkabler i en trekløverformasjon, samt en jordingskabel som går inn i fundamenter, og fungerer som en slitesterk barriere mot oversvømmelse, gass, fuktighet og gnagere. Dette er en firedelt tetning som også er enkel å montere i våte miljøer og i omgivelser med rennende vann. Gjennomføringen tåler ekstrem kabelbøyning og har en toleranse på +3 mm mot åpningen, samt en indikator som viser når komprimert tetning er oppnådd. Tetningen kan monteres i utslagbare "knock-out"-hylser, i rørledninger eller kjerneborede hull.

- Skadedyrbestandig
- Rask og enkel å installere
- Gir utmerket kabelbevaring

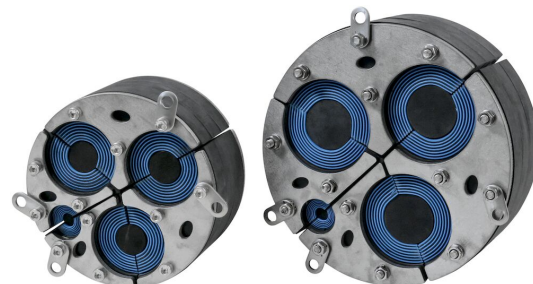

Produktegenskaper



Vann tett



Gas tett



IP/UL NEMA

Struktur for installasjon



Betong

Festetype



Eksisterende hull



Eksisterende hylse

Graderinger og sertifikater

Tetthet

- Gass: 0,3 bar (konstant)
- Vann: 0,3 bar (konstant)
- IP 68

Tetningskomponentdata

Tetningskomponenter



H3+1 UG™-tetning




smøremiddel

For ytterligere informasjon, kan du besøke www.roxtec.com.




Forhåndskonfigurerte gjennomføringskit

mm/kg



H3+1 150 UG



H3+1 200 UG

Tittel	Konfigurasjon	Utsparingsmål Ø	Vekt	Art.nr.
H3+1 150 UG	4x (10.0-53.0)	150 - 153	2.6	192261
H3+1 200 UG	4x (10.0-68.0)	200 - 203	4.2	192082

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-18