




Roxtec H3+1 UG™ afdichting

Kabeldoorvoer voor in funderingen

De Roxtec H3+1 UG™ afdichting is ideaal voor elektriciteitskabels in driehoeksverband (trefoil) plus een aardingskabel die via funderingen worden doorgevoerd. De afdichting is een duurzame barrière tegen wateroverlast, gas, vocht en knaagdieren. De vierdelige afdichting kan eenvoudig worden geïnstalleerd, ook in natte omstandigheden en in omgevingen met stromend water. De afdichting is bestand tegen extreme kabelbuiging. De doorvoer heeft +3 mm speling ten opzichte van de sparring en is voorzien van een indicator, die aangeeft wanneer de afdichting volledig is gecompriëerd. De afdichting kan worden geïnstalleerd in instort-units, buizen en vorgeboorde openingen.

- Knaagdierbestendig
- Snel en eenvoudig te installeren
- Biedt uitstekende trekbelasting

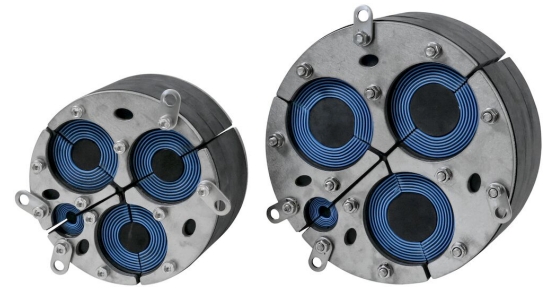

Producteigenschappen



Waterdicht



Gasdicht



IP/UL NEMA

Installatiestructuur



Beton

Montagetype



Bestaande opening



Bestaande buis

Specificaties en certificaten

Dichtheid

- Gas: 0,3 bar (constante druk)
- Water: 0,3 bar (constante druk)
- IP 68

Gegevens van afdichtcomponenten

Afdichtcomponenten



H3+1 UG™ afdichting




vetstick

Ga naar [roxtec.com](https://www.roxtec.com) voor uitgebreide informatie.




Vooraf geconfigureerde doorvoersets

mm/kg



H3+1 150 UG



H3+1 200 UG

Titel	Configuratie	Afmetingen opening Ø	Gewicht	Art. nr.
H3+1 150 UG	4x (10.0-53.0)	150 - 153	2.6	192261
H3+1 200 UG	4x (10.0-68.0)	200 - 203	4.2	192082

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-18