




# Roxtec FlamePlus™ -läpivienti

Kevyt läpivienti irrotettavalla suojalevyllä

Roxtec FlamePlus™ -läpivienti on usealle kaapelille mitoitettu läpivienti, joka voidaan kiinnittää erilaisiin rakenteisiin. Kehyksen modulaarisuus yksinkertaistaa käsittelyä ja logistiikkaa. Kevyt rakenne tekee siitä ihanteellisen sandwich-paneeleille, kun taas leveä laippa varmistaa ruuvien ja läpivientiaukon reunan välisen turvallisen reunaetäisyyden minimoiden halkeamien riskin pultattaessa betoni- tai tiiliseiniin. Irrotettava levy sulkee aukon ja estää veden tunkeutumisen rakennusvaiheen aikana ja sen jälkeen.

Tiivistysmoduulit mukautuvat erikokoisiin kaapeleihin ja niitä voi käyttää tiivsteen kapasiteetin lisäämiseen.

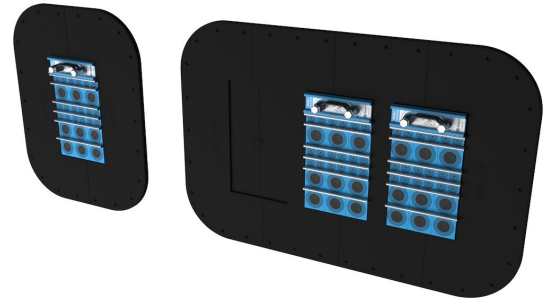

- Kevyt
- Tiiviyys rakennusvaiheessa
- Avattava
- Modulaarinen muotoilu

## Tuotteen ominaisuudet



Paloluokiteltu



IP/UL NEMA

## Asennusrakenne



Sandwich-paneeli



Betoni

## Asennustyyppi



Pulttaus

## Luokitukset ja sertifiointit

### Paloluokka

- E/EI-luokitus standardin EN 13501 mukaan

### Tiiviyys

- IP 66

## Kehyksen mitat

mm/kg


Alla olevat kehysvaihtoehdot ovat vain osa valikoimastamme. Kattava valikoima kehyksiä ja kokoonpanoja löytyy osoitteesta [roxtec.com](https://www.roxtec.com).

Otsikko	Kehysaukot	Pakkaustila	Ulkomitat WxHxD	Aukon mitat w x h	Paino	Tuoteno
FLAMEPLUS 6x2 WITH EXT. FRAME	2	120 x 180	487 x 433 x 310	351 x 297	8.4	223806
FLAMEPLUS 6x3 WITH EXT. FRAME	3	120 x 180	642 x 433 x 310		11.4	223807
FLAMEPLUS 6x1 WITH EXT. FRAME	1	120 x 180	331 x 433 x 310		5.6	223805
FLAMEPLUS 6x1	1	120 x 180	332 x 433 x 67	196 x 297	2.6	213303
FLAMEPLUS 6x2	2	120 x 180	487 x 433 x 67	351 x 297	5	213321
FLAMEPLUS 6x3	3	120 x 180	643 x 433 x 67	507 x 297	6.4	213322
FLAMEPLUS 6x4	4	120 x 180	798 x 433 x 67	662 x 297	7.5	235413



# Tiivistyskomponenttien tiedot

## Tiivistyskomponentit



RM -moduuli  
Multidiameter™-teknologialla



Roxtecin kitti



Roxtec-välilevy



Roxtec-asennusrasva



Wedge ja Wedgekit

Lisätietoja on osoitteessa [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-06-29