



Roxtec CSP-läpiviennit

Tiivistys kaapeille suuren kaapelitiheyden sovelluksiin

Roxtec CSP 16/32 on monikaapeli- ja putkiläpivienti kaappeihin ja koteloihin. Kehys on valmistettu AISI316-ruostumattomasta teräksestä ja saatavilla kokoina, jotka sopivat enintään 16 tai 32 kaapelille.

Siinä on integroitu puristussyksikkö, joka parantaa käytettävyyttä ja helpottaa asennusta entisestään. Tiivistysmoduulit sopivat erikokoisiin kaapeleihin ja putkiin, ja ne voidaan valita IP- tai UL/NEMA-vaatimusten mukaisesti.



- Tilatehokas
- Helppo ja nopea asennus
- Sopii kaapeleille joissa on liitin

Tuotteen ominaisuudet



IP/UL NEMA

Asennusrakenne



Kaapit ja kotelot



Metalli

Asennustyyppi



Pulttaus

Luokitukset ja sertifiointit

Tiiviys

- IP 66/67 standardin IEC 60529 mukaan, UL/NEMA 4,4X,12,13

Kehyksen mitat

mm/kg

Alla olevat kehysvaihtoehdot ovat vain osa valikoimastamme. Kattava valikoima kehyksiä ja kokoonpanoja löytyy osoitteesta [roxtec.com](https://www.roxtec.com).


Otsikko	Kehysaukot	Pakkaustila	Ulkomitat WxD	Aukon mitat w x h	Paino	Tuotenro
CSP 16 AISI316 FRAME ASSEMBLY	2	40 x 80	131 x 140 x 63.5	109 x 109	1.8	233728
CSP 32 AISI316 FRAME ASSEMBLY	4	40 x 80	223 x 140 x 63.5	201 x 109	2.9	233729

Tiivistyskomponenttien tiedot


Tiivistyskomponentit



Roxtec-asennusrasva



HD -moduuli
Multidiameter™-teknologialla




HD -umpimoduuli

Lisätietoja on osoitteesta [roxtec.com](https://www.roxtec.com).

Valmiiksi määritetyt läpivientisarjat

mm/kg

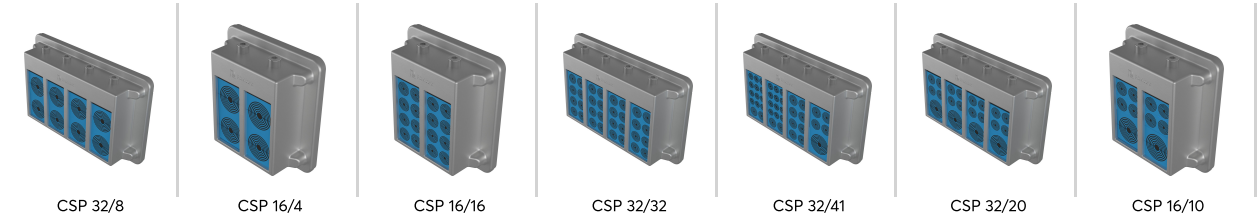

Otsikko	Kokoonpano	Ulkomitat WxHxD	Aukon mitat w x h	Paino	Tuotenro
CSP 32/8	8x (9.5-31.5)	223 x 140 x 63.5	201 x 109	3.1	241713
CSP 16/4	4x (9.5-31.5)	131 x 140 x 63.5	109 x 109	1.8	241194
CSP 16/16	16x (3.5-15.5)	131 x 140 x 63.5	109 x 109	2.1	241192
CSP 32/32	32x (3.5-15.5)	223 x 140 x 63.5	201 x 109	3.6	241716
CSP 32/41	1x (9.5-31.5), 16x (3.5-15.5), 24x (3.5-9.5)	223 x 140 x 63.5	201 x 109	3.1	241718
CSP 32/20	4x (9.5-31.5), 16x (3.5-15.5)	223 x 140 x 63.5	201 x 109	3.7	241717
CSP 16/10	2x (9.5-31.5), 8x (3.5-15.5)	131 x 140 x 63.5	109 x 109	2.1	241193

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-10