



Passages Roxtec CSP

Solution d'étanchéité pour les armoires destinée aux applications à haute densité de câbles.

Le Roxtec CSP 16/32 est un système de passage multi-câbles et tuyaux pour les armoires et coffrets. Le cadre est fabriqué en acier inoxydable AISI316 et disponible en dimensions permettant d'accueillir jusqu'à 16 ou 32 câbles. Il a une unité de compression intégrée pour améliorer encore la facilité d'utilisation et d'installation. Les modules d'étanchéité s'adaptent à des câbles et tuyauteries de différentes tailles et sont disponibles pour répondre aux exigences spécifiques en matière de certification IP ou UL/NEMA.



- Surface optimisée
- Installation facile et rapide
- Accepte des câbles pré-connectés

Caractéristiques du produit



IP/UL NEMA

Structure d'installation



Armoires et coffrets



Métal

Type de fixation



Boulonnage

Classements et certificats

Étanchéité

- IP 66/67 selon IEC 60529, UL/NEMA 4,4X,12,13

Dimensions du cadre

mm/kg

Les variantes de cadre ci-dessous sont une sélection limitée. Pour voir la gamme complète de cadres et de configurations, veuillez visiter [roxtec.com](https://www.roxtec.com).


Titre	Ouvertures de cadre	Espace de remplissage	Dimensions externes WxHxD	Dimensions d'ouverture w x h	Poids	N° art.
CSP 16 AISI316 FRAME ASSEMBLY	2	40 x 80	131 x 140 x 63.5	109 x 109	1.8	233728
CSP 32 AISI316 FRAME ASSEMBLY	4	40 x 80	223 x 140 x 63.5	201 x 109	2.9	233729

Éléments d'étanchéité


Éléments d'étanchéité



Lubrifiant Roxtec



Module HD avec Multidiameter™




Modules pleins HD

Pour plus d'informations, veuillez consulter [roxtec.com](https://www.roxtec.com).

Kits de passage préconfigurés

mm/kg

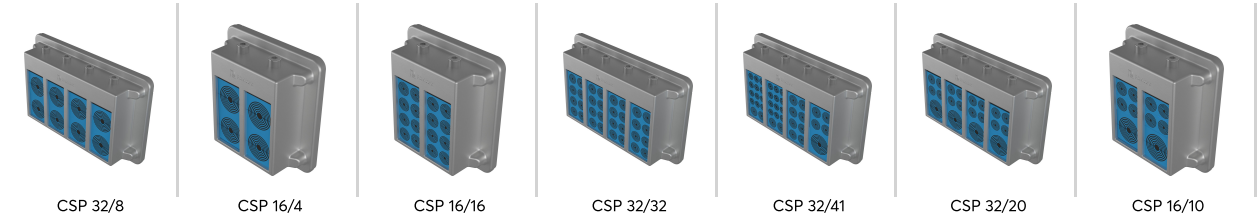

Titre	Configuration	Dimensions externes WxHxD	Dimensions d'ouverture w x h	Poids	N° art.
CSP 32/8	8x (9.5-31.5)	223 x 140 x 63.5	201 x 109	3.1	241713
CSP 16/4	4x (9.5-31.5)	131 x 140 x 63.5	109 x 109	1.8	241194
CSP 16/16	16x (3.5-15.5)	131 x 140 x 63.5	109 x 109	2.1	241192
CSP 32/32	32x (3.5-15.5)	223 x 140 x 63.5	201 x 109	3.6	241716
CSP 32/41	1x (9.5-31.5), 16x (3.5-15.5), 24x (3.5-9.5)	223 x 140 x 63.5	201 x 109	3.1	241718
CSP 32/20	4x (9.5-31.5), 16x (3.5-15.5)	223 x 140 x 63.5	201 x 109	3.7	241717
CSP 16/10	2x (9.5-31.5), 8x (3.5-15.5)	131 x 140 x 63.5	109 x 109	2.1	241193

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-10