



Roxtec CSP doorvoeren

Afdichting voor kasten voor toepassingen met een hoge kabeldichtheid.

De Roxtec CSP 16/32 is een doorvoerunit voor kasten en behuizingen, voor meerdere kabels en leidingen. Het frame is gemaakt van AISI316 roestvast staal en verkrijgbaar in uitvoeringen voor maximaal 16 of 32 kabels. Het frame is voorzien van een geïntegreerde compressie-unit om het gebruik en de installatie te vergemakkelijken. De afdichtmodules zijn aanpasbaar aan kabels en leidingen van verschillende diameters en kunnen worden geselecteerd op basis van specifieke eisen voor IP- of UL/NEMA-classificaties.



- Ruimtebesparend
- Snel en eenvoudig te installeren
- Geschikt voor kabels met connector

Producteigenschappen



IP/UL NEMA

Installatiestructuur



Kasten en behuizingen



Metaal

Montagetype



Bouten

Specificaties en certificaten

Dichtheid

- IP 66/67 conform IEC 60529, UL/NEMA 4,4X,12,13

Afmetingen frame

mm/kg

De onderstaande frame-uitvoeringen zijn een beperkte selectie. Ga naar [roxtec.com](https://www.roxtec.com) voor het volledige assortiment frames en configuraties.


Titel	Frame-openingen	Vrije doorvoerruimte	Buitenafmetingen WxHxD	Afmetingen opening w x h	Gewicht	Art. nr.
CSP 32 AISI316 FRAME ASSEMBLY	4	40 x 80	223 x 140 x 63.5	201 x 109	2.9	233729
CSP 16 AISI316 FRAME ASSEMBLY	2	40 x 80	131 x 140 x 63.5	109(+1/-0.5) x 109(+1/-0.5)	1.8	233728

Gegevens van afdichtcomponenten


Afdichtcomponenten



vetstick



HD module met Multidiameter™




HD compensatiemodule

Ga naar [roxtec.com](https://www.roxtec.com) voor uitgebreide informatie.

Vooraf geconfigureerde doorvoersets

mm/kg

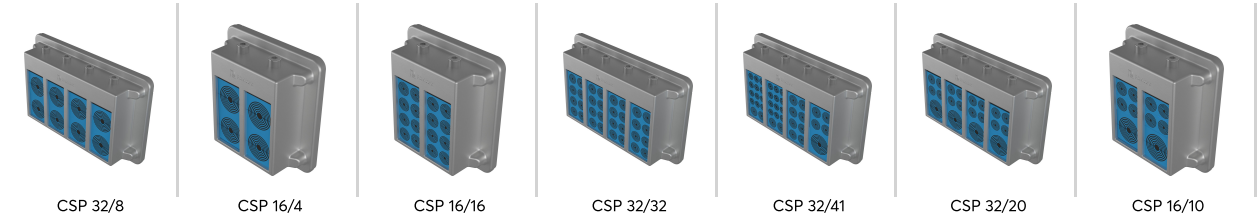

Titel	Configuratie	Buitenafmetingen WxHxD	Afmetingen opening w x h	Gewicht	Art. nr.
CSP 32/8	8x (9.5-31.5)	223 x 140 x 63.5	201 x 109	3.1	241713
CSP 16/4	4x (9.5-31.5)	131 x 140 x 63.5	109 x 109	1.8	241194
CSP 16/16	16x (3.5-15.5)	131 x 140 x 63.5	109 x 109	2.1	241192
CSP 32/32	32x (3.5-15.5)	223 x 140 x 63.5	201 x 109	3.6	241716
CSP 32/41	1x (9.5-31.5), 16x (3.5-15.5), 24x (3.5-9.5)	223 x 140 x 63.5	201 x 109	3.1	241718
CSP 32/20	4x (9.5-31.5), 16x (3.5-15.5)	223 x 140 x 63.5	201 x 109	3.7	241717
CSP 16/10	2x (9.5-31.5), 8x (3.5-15.5)	131 x 140 x 63.5	109 x 109	2.1	241193

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-12