



Roxtec CSP BG

Sistema per applicazioni di collegamento equipotenziale e messa a terra in armadi e quadri.

Il Roxtec CSP 16/32 è un dispositivo per attraversamenti multi-cavo e tubi in armadi e quadri. Il telaio è realizzato in acciaio inox AISI316 ed è disponibile in configurazioni fino a 16 o 32 cavi. È dotato di un'unità di compressione integrata per facilitarne l'utilizzo e l'installazione. I moduli si adattano a cavi e tubi di diverse dimensioni e possono essere selezionati in base a specifiche esigenze di classificazione IP o UL/NEMA e di applicazioni di collegamento e messa a terra.



- Compatto
- Veloce e facile da installare
- Consente la sigillatura di cavi precablati

Caratteristiche



IP/UL NEMA



Sicurezza elettrica

Struttura dell'installazione



Armadi e quadri



Metallo

Tipo di montaggio



Imbullonatura

Ratings e certificati

Tenuta

- IP 66/67 in accordo a IEC 60529, UL/NEMA 4,4X,12,13

Supporti

- Messa a terra integrata

Dimensioni telaio

mm/kg

Le varianti di telaio seguenti rappresentano una selezione limitata. Per la gamma completa di telai e configurazioni, visita [roxtec.com](https://www.roxtec.com).


Titolo	Aperture del telaio	Spazio di riempimento	Dimensioni esterne WxHxD	Dimensioni apertura w x h	Peso	Art. Nr.
CSP 32 AISI316 FRAME ASSEMBLY	4	40 x 80	223 x 140 x 63.5	201 x 109	2.9	233729
CSP 16 AISI316 FRAME ASSEMBLY	2	40 x 80	131 x 140 x 63.5	109(+1/-0.5) x 109(+1/-0.5)	1.8	233728

Dati relativi ai componenti


Componenti per la sigillatura



Lubrificante



Modulo di compensazione CM BG™




Moduli CM BG™ con Multidiameter™

Per informazioni dettagliate, visita la pagina [roxtec.com](https://www.roxtec.com).

Kit pre-configurati

mm/kg

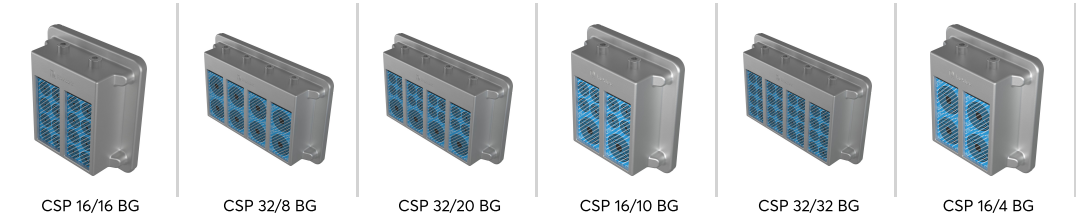

Titolo	Configurazione	Dimensioni esterne WxHxD	Dimensioni apertura w x h	Peso	Art. Nr.
CSP 16/16 BG	16x (3.5-16.5)	131 x 140 x 63.5	109 x 109	2.2	241723
CSP 32/8 BG	8x (9.5-32.5)	223 x 140 x 63.5	201 x 109	3.1	241724
CSP 32/20 BG	4x (9.5-32.5), 16x (3.5-16.5)	223 x 140 x 63.5	201 x 109	3.7	241725
CSP 16/10 BG	2x (9.5-32.5), 8x (3.5-16.5)	131 x 140 x 63.5	109 x 109	2.2	241722
CSP 32/32 BG	32x (3.5-16.5)	223 x 140 x 63.5	201 x 109	3.7	243522
CSP 16/4 BG	4x (9.5-32.5)	131 x 140 x 63.5	109 x 109	1.8	241720

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-13