




Roxtec GOH FL100-gennemføring

Gennemføring til eksisterende kabler, der kan åbnes, inklusive en bred flange egnet til boltmontage på betonstrukturer.

Roxtec GOH FL100 er en kabel- og rørtætning, der kan åbnes, og som muliggør installation omkring allerede førte elementer. Den rektangulære stålramme har en 100 mm bred flange med bolthuller tæt på den ydre omkreds, for at sikre en korrekt fastgørelse og undgå risiko for revner. Gennemføringen er det rigtige valg, når der skal boltes til beton.

- Perfekt til eftermontage
- Kan åbnes

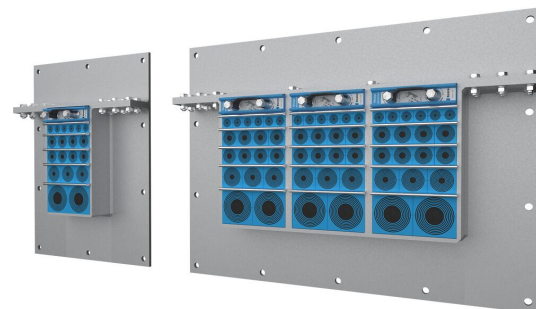

Produktegenskaber



Brandklassificeret



IP/UL NEMA

Byggekonstruktion



Beton



Mursten

Monteringstype



Boltning

Normeringer og certifikater

Brand

- E/EI-klassificering i henhold til EN 13501

Tæthed

- IP 68

Rammedimensioner

mm/kg

De nedenstående rammevarianter udgør et begrænset udvalg. Du kan se hele udvalget af rammer og konfigurationer på [roxtec.com](https://www.roxtec.com).


Title	Rammeåbninger	Pakkeareaö	Udvendige mål WxHxD	Åbningsmål w x h	Vægt	Art.-nr.
GOH 2x1 FL100 AISI316	1	120 x 60	332.5 x 313 x 60	148(+5/-5) x 128(+5/-5)	7	214791
GOH 6x2 FL100 AISI316	2	120 x 180	465 x 430 x 60	280(+5/-5) x 245(+5/-5)	12	164359
GOH 6x3 FL100 AISI316	3	120 x 180	597.5 x 430 x 60	413(+5/-5) x 245(+5/-5)	14.4	157824
GOH 6x4 FL100 AISI316	4	120 x 180	730 x 430 x 60	545(+5/-5) x 245(+5/-5)	18.7	125356
GOH 8x1 FL100 AISI316	1	120 x 240	332.5 x 490 x 60	148(+5/-5) x 305(+5/-5)	10	179208
GOH 8x2 FL100 AISI316	2	120 x 240	465 x 490 x 60	280(+5/-5) x 305(+5/-5)	13.4	110472
GOH 8x3 FL100 AISI316	3	120 x 240	597.5 x 490 x 60	413(+5/-5) x 305(+5/-5)	16	104111
GOH 8x4 FL100 AISI316	4	120 x 240	730 x 490 x 60	545(+5/-5) x 305(+5/-5)	19.4	173441
GOH 2x1 FL100 GALV	1	120 x 60	332.5 x 313 x 60	148(+5/-5) x 128(+5/-5)	7	124009
GOH 2x2 FL100 GALV	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250893
GOH 2x2 FL100 AISI316	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250896
GOH 2x3 FL100 GALV	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250894
GOH 2x4 FL100 GALV	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	15	179978
GOH 4x1 FL100 GALV	1	120 x 120	332.5 x 371.5 x 60	148(+5/-5) x 187(+5/-5)	8.1	107250
GOH 4x2 FL100 GALV	2	120 x 120	465 x 371.5 x 60	280(+5/-5) x 187(+5/-5)	11	121490
GOH 4x3 FL100 GALV	3	120 x 120	597.5 x 371.5 x 60	413(+5/-5) x 187(+5/-5)	13.5	192221
GOH 4x4 FL100 GALV	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	18	121489
GOH 6x1 FL100 GALV	1	120 x 180	332.5 x 430 x 60	148(+5/-5) x 245(+5/-5)	7.4	179403
GOH 6x2 FL100 GALV	2	120 x 180	465 x 430 x 60	280(+5/-5) x 245(+5/-5)	12	179416
GOH 6x3 FL100 GALV	3	120 x 180	597.5 x 430 x 60	413(+5/-5) x 245(+5/-5)	15	179976
GOH 6x4 FL100 GALV	4	120 x 180	730 x 430 x 60	545(+5/-5) x 245(+5/-5)	18	119419
GOH 2x3 FL100 AISI316	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250897
GOH 8x1 FL100 GALV	1	120 x 240	332.5 x 490 x 60	148(+5/-5) x 305(+5/-5)	9	151629



Title	Rammeåbninger	Pakkeareal	Udvendige mål WxHxD	Åbningsmål w x h	Vægt	Art.-nr.
GOH 8x2 FL100 GALV	2	120 x 240	465 x 490 x 60	280(+5/-5) x 305(+5/-5)	13	150141
GOH 8x3 FL100 GALV	3	120 x 240	597.5 x 490 x 60	413(+5/-5) x 305(+5/-5)	17	155328
GOH 8x4 FL100 GALV	4	120 x 240	730 x 490 x 60	545(+5/-5) x 305(+5/-5)	20.3	121488
GOH 2x4 FL100 AISI316	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	14.9	250898
GOH 4x1 FL100 AISI316	1	120 x 120	332.5 x 371.5 x 60	148(+5/-5) x 187(+5/-5)	7.6	152890
GOH 4x2 FL100 AISI316	2	120 x 120	465 x 371.5 x 60	280(+5/-5) x 187(+5/-5)	10.8	215709
GOH 4x3 FL100 AISI316	3	120 x 120	597.5 x 371.5 x 60	413(+5/-5) x 187(+5/-5)	14	215812
GOH 4x4 FL100 AISI316	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	16.8	227620
GOH 6x1 FL100 AISI316	1	120 x 180	332.5 x 430 x 60	148(+5/-5) x 245(+5/-5)	8.6	157979

Data om tætningskomponenter


Tætningskomponenter



Stayplate




tætningskit



RM fast
kompensationsmodul



wedge og wedgekit



RM-modul med
Multidiameter™



holderværktøj



pre-kompressionsværktøj
øjer



Lubrikant

For merne information, besøg venligst [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-01-13



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.