




Roxtec GOH FL100 transit

Openable transit for existing cables, including a wide flange suitable for bolting to concrete structures.

The Roxtec GOH FL100 is an openable cable and pipe seal that enables installation around already routed services. The rectangular steel frame has a 100mm wide flange with bolt holes close to the outer perimeter to secure a correct fixing and avoid the risk of cracks. The transit is the right choice when bolting to concrete.

- Perfect for retrofit
- Openable

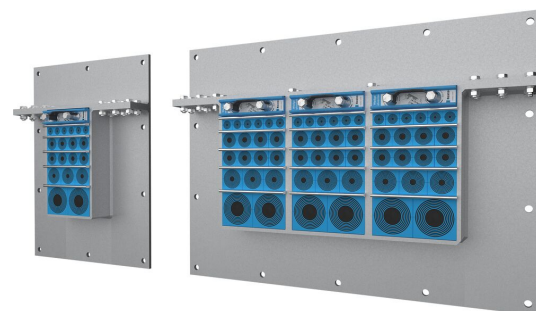

Product characteristics



Fire rated



IP/UL NEMA

Structure of installation



Concrete



Brick

Mounting type



Bolting

Ratings & certificates

Fire

- E/EI rating according to EN 13501

Tightness

- IP 68

Frame dimensions

mm/kg

The frame variants below are a limited selection. For the full range of frames and configurations, please visit [roxtec.com](https://www.roxtec.com).


Product	Frame openings	Packing space	External dimensions WxHxD	Aperture dimensions w x h	Weight	Art. no
GOH 2x1 FL100 AISI316	1	120 x 60	332.5 x 313 x 60	147.5(+75/-5) x 128(+75/-5)	7	214791
GOH 6x2 FL100 AISI316	2	120 x 180	465 x 430 x 60	280(+75/-5) x 245(+75/-5)	11.7	164359
GOH 6x3 FL100 AISI316	3	120 x 180	597.5 x 430 x 60	412.5(+75/-5) x 245(+75/-5)	14.4	157824
GOH 6x4 FL100 AISI316	4	120 x 180	730 x 430 x 60	545(+75/-5) x 245(+75/-5)	18.3	125356
GOH 8x1 FL100 AISI316	1	120 x 240	332.5 x 490 x 60	147.5(+75/-5) x 305(+75/-5)	10	179208
GOH 8x2 FL100 AISI316	2	120 x 240	465 x 490 x 60	280(+75/-5) x 305(+75/-5)	13.35	110472
GOH 8x3 FL100 AISI316	3	120 x 240	597.5 x 490 x 60	412.5(+75/-5) x 305(+75/-5)	15.97	104111
GOH 8x4 FL100 AISI316	4	120 x 240	730 x 490 x 60	545(+75/-5) x 305(+75/-5)	19.4	173441
GOH 2x1 FL100 GALV	1	120 x 60	332.5 x 313 x 60	147.5(+75/-5) x 128(+75/-5)	7	124009
GOH 2x2 FL100 GALV	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250893
GOH 2x2 FL100 AISI316	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250896
GOH 2x3 FL100 GALV	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250894
GOH 2x4 FL100 GALV	4	120 x 60	730 x 313 x 60	545(+75/-5) x 128(+75/-5)	15	179978
GOH 4x1 FL100 GALV	1	120 x 120	332.5 x 371.5 x 60	147.5(+75/-5) x 186.5(+75/-5)	8.1	107250
GOH 4x2 FL100 GALV	2	120 x 120	465 x 371.5 x 60	280(+75/-5) x 186.5(+75/-5)	11	121490
GOH 4x3 FL100 GALV	3	120 x 120	597.5 x 371.5 x 60	412.5(+75/-5) x 186.5(+75/-5)	13.5	192221
GOH 4x4 FL100 GALV	4	120 x 120	730 x 371.5 x 60	545(+75/-5) x 186.5(+75/-5)	18	121489
GOH 6x1 FL100 GALV	1	120 x 180	332.5 x 430 x 60	147.5(+75/-5) x 245(+75/-5)	7.36	179403
GOH 6x2 FL100 GALV	2	120 x 180	465 x 430 x 60	280(+75/-5) x 245(+75/-5)	12	179416
GOH 6x3 FL100 GALV	3	120 x 180	597.5 x 430 x 60	412.5(+75/-5) x 245(+75/-5)	15	179976
GOH 6x4 FL100 GALV	4	120 x 180	730 x 430 x 60	545(+75/-5) x 245(+75/-5)	18	119419
GOH 2x3 FL100 AISI316	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250897
GOH 8x1 FL100 GALV	1	120 x 240	332.5 x 490 x 60	147.5(+75/-5) x 305(+75/-5)	9	151629



Product	Frame openings	Packing space	External dimensions WxHxD	Aperture dimensions w x h	Weight	Art. no
GOH 8x2 FL100 GALV	2	120 x 240	465 x 490 x 60	280(+75/-5) x 305(+75/-5)	13	150141
GOH 8x3 FL100 GALV	3	120 x 240	597.5 x 490 x 60	412.5(+75/-5) x 305(+75/-5)	17	155328
GOH 8x4 FL100 GALV	4	120 x 240	730 x 490 x 60	545(+75/-5) x 305(+75/-5)	20.3	121488
GOH 2x4 FL100 AISI316	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	14.9	250898
GOH 4x1 FL100 AISI316	1	120 x 120	332.5 x 371.5 x 60	147.5(+75/-5) x 186.5(+75/-5)	7.63	152890
GOH 4x2 FL100 AISI316	2	120 x 120	465 x 371.5 x 60	280(+75/-5) x 186.5(+75/-5)	10.83	215709
GOH 4x3 FL100 AISI316	3	120 x 120	597.5 x 371.5 x 60	412.5(+75/-5) x 186.5(+75/-5)	14	215812
GOH 4x4 FL100 AISI316	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	16.8	227620
GOH 6x1 FL100 AISI316	1	120 x 180	332.5 x 430 x 60	147.5(+75/-5) x 245(+75/-5)	8.6	157979

Sealing components

Sealing components



RM solid compensation module




Stayplate



sealing kit



Wedge & Wedge kit



RM module with Multidiameter™



Pre-compression tools



Holder tools



Lubricant

For detailed information, please visit [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-08-10



Roxtec ® and Multidiameter ® are registered trademarks of Roxtec in Sweden and/or other countries.