




Roxtec GOH FL100 - läpivienti

Avattava läpivienti olemassa oleville kaapeleille, mukaan lukien leveä laippa, joka soveltuu pulttaamiseen betonirakenteisiin.

Roxtec GOH FL100 on avattava kaapeli- ja putkitiiviste, joka mahdollistaa asennuksen jo reititettyjen johtojen ja putkien ympärille. Suorakaiteen muotoisessa teräsrungossa on 100 mm leveä laippa, jossa on pulttinreiät lähellä ulkokehää oikean kiinnityksen varmistamiseksi ja halkeamien välttämiseksi. Läpivienti on oikea valinta betoniin pultattaessa.

- Erinomainen jälkiasennuksiin
- Avattava

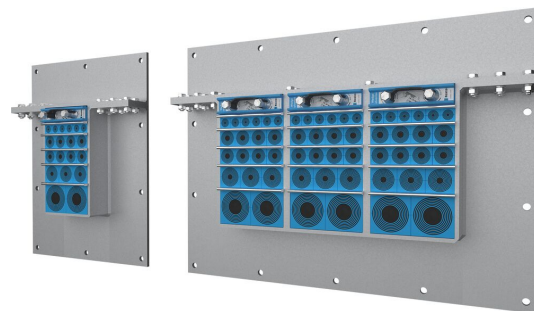

Tuotteen ominaisuudet



Paloluokiteltu



IP/UL NEMA

Asennusrakenne



Betoni



Tiili

Asennustyyppi



Pulttaus

Luokitukset ja sertifiointit

Paloluokka

- E/EI-luokitus standardin EN 13501 mukaan

Tiiviyys

- IP 68

Kehyksen mitat

mm/kg

Alla olevat kehysvaihtoehdot ovat vain osa valikoimastamme. Kattava valikoima kehyksiä ja kokoonpanoja löytyy osoitteesta [roxtec.com](https://www.roxtec.com).


Otsikko	Kehysaukot	Pakkaustila	Ulkomitat WxHxD	Aukon mitat w x h	Paino	Tuotenumero
GOH 2x1 FL100 AISI316	1	120 x 60	332.5 x 313 x 60	148(+5/-5) x 128(+5/-5)	7	214791
GOH 6x2 FL100 AISI316	2	120 x 180	465 x 430 x 60	280(+5/-5) x 245(+5/-5)	12	164359
GOH 6x3 FL100 AISI316	3	120 x 180	597.5 x 430 x 60	413(+5/-5) x 245(+5/-5)	14.4	157824
GOH 6x4 FL100 AISI316	4	120 x 180	730 x 430 x 60	545(+5/-5) x 245(+5/-5)	18.7	125356
GOH 8x1 FL100 AISI316	1	120 x 240	332.5 x 490 x 60	148(+5/-5) x 305(+5/-5)	10	179208
GOH 8x2 FL100 AISI316	2	120 x 240	465 x 490 x 60	280(+5/-5) x 305(+5/-5)	13.4	110472
GOH 8x3 FL100 AISI316	3	120 x 240	597.5 x 490 x 60	413(+5/-5) x 305(+5/-5)	16	104111
GOH 8x4 FL100 AISI316	4	120 x 240	730 x 490 x 60	545(+5/-5) x 305(+5/-5)	19.4	173441
GOH 2x1 FL100 GALV	1	120 x 60	332.5 x 313 x 60	148(+5/-5) x 128(+5/-5)	7	124009
GOH 2x2 FL100 GALV	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250893
GOH 2x2 FL100 AISI316	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250896
GOH 2x3 FL100 GALV	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250894
GOH 2x4 FL100 GALV	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	15	179978
GOH 4x1 FL100 GALV	1	120 x 120	332.5 x 371.5 x 60	148(+5/-5) x 187(+5/-5)	8.1	107250
GOH 4x2 FL100 GALV	2	120 x 120	465 x 371.5 x 60	280(+5/-5) x 187(+5/-5)	11	121490
GOH 4x3 FL100 GALV	3	120 x 120	597.5 x 371.5 x 60	413(+5/-5) x 187(+5/-5)	13.5	192221
GOH 4x4 FL100 GALV	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	18	121489
GOH 6x1 FL100 GALV	1	120 x 180	332.5 x 430 x 60	148(+5/-5) x 245(+5/-5)	7.4	179403
GOH 6x2 FL100 GALV	2	120 x 180	465 x 430 x 60	280(+5/-5) x 245(+5/-5)	12	179416
GOH 6x3 FL100 GALV	3	120 x 180	597.5 x 430 x 60	413(+5/-5) x 245(+5/-5)	15	179976
GOH 6x4 FL100 GALV	4	120 x 180	730 x 430 x 60	545(+5/-5) x 245(+5/-5)	18	119419
GOH 2x3 FL100 AISI316	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250897



Otsikko	Kehysaukot	Pakkaustila	Ulkomitat WxHxD	Aukon mitat w x h	Paino	Tuotenro
GOH 8x1 FL100 GALV	1	120 x 240	332.5 x 490 x 60	148(+5/-5) x 305(+5/-5)	9	151629
GOH 8x2 FL100 GALV	2	120 x 240	465 x 490 x 60	280(+5/-5) x 305(+5/-5)	13	150141
GOH 8x3 FL100 GALV	3	120 x 240	597.5 x 490 x 60	413(+5/-5) x 305(+5/-5)	17	155328
GOH 8x4 FL100 GALV	4	120 x 240	730 x 490 x 60	545(+5/-5) x 305(+5/-5)	20.3	121488
GOH 2x4 FL100 AISI316	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	14.9	250898
GOH 4x1 FL100 AISI316	1	120 x 120	332.5 x 371.5 x 60	148(+5/-5) x 187(+5/-5)	7.6	152890
GOH 4x2 FL100 AISI316	2	120 x 120	465 x 371.5 x 60	280(+5/-5) x 187(+5/-5)	10.8	215709
GOH 4x3 FL100 AISI316	3	120 x 120	597.5 x 371.5 x 60	413(+5/-5) x 187(+5/-5)	14	215812
GOH 4x4 FL100 AISI316	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	16.8	227620
GOH 6x1 FL100 AISI316	1	120 x 180	332.5 x 430 x 60	148(+5/-5) x 245(+5/-5)	8.6	157979

Tiivistyskomponenttien tiedot


Tiivistyskomponentit



Roxtec-välilevy




Roxtecin kitti



RM -umpimoduuli



Wedge ja Wedgekit



RM -moduuli
Multidiameter™-teknologia



Roxtecin pidintyökalut



Roxtec-esipuristustyökalut



Roxtec-asennusrasva

Lisätietoja on osoitteessa [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-01-13