




Passage Roxtec GOH FL100

Passage ouvrable pour des câbles existants, il est composé d'une large bride adaptée au boulonnage sur des structures en béton.

Le Roxtec GOH FL100 est un passage de câbles et de tuyaux ouvrable qui permet une installation autour des réseaux déjà acheminés. Le cadre rectangulaire en acier est composé d'une bride de 100 mm de large avec des trous pour les boulons proches du périmètre extérieur pour assurer une fixation correcte et éviter les risques de fissures. La traversée est le choix adéquat pour boulonner sur du béton.

- Idéal pour la rénovation
- Ouvrable

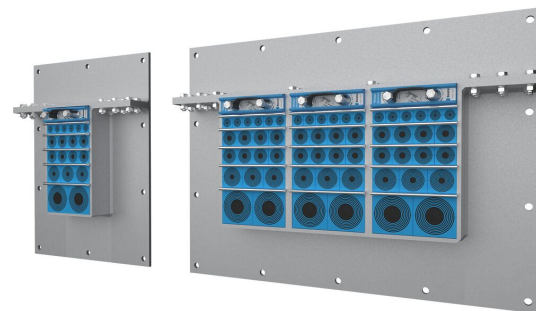

Caractéristiques du produit



Coupe-feu



IP/UL NEMA

Structure d'installation



Béton



Brique

Type de fixation



Boulonnage

Classements et certificats

Feu

- Classement E/EI selon EN 13501

Étanchéité

- IP 68

Dimensions du cadre

mm/kg

Les variantes de cadre ci-dessous sont une sélection limitée. Pour voir la gamme complète de cadres et de configurations, veuillez visiter [roxtec.com](https://www.roxtec.com).

Titre	Ouvertures de cadre	Espace de remplissage	Dimensions externes WxHxD	Dimensions d'ouverture w x h	Poids	N° art.
GOH 2x1 FL100 AISI316	1	120 x 60	332.5 x 313 x 60	148(+5/-5) x 128(+5/-5)	7	214791
GOH 6x2 FL100 AISI316	2	120 x 180	465 x 430 x 60	280(+5/-5) x 245(+5/-5)	12	164359
GOH 6x3 FL100 AISI316	3	120 x 180	597.5 x 430 x 60	413(+5/-5) x 245(+5/-5)	14.4	157824
GOH 6x4 FL100 AISI316	4	120 x 180	730 x 430 x 60	545(+5/-5) x 245(+5/-5)	18.7	125356
GOH 8x1 FL100 AISI316	1	120 x 240	332.5 x 490 x 60	148(+5/-5) x 305(+5/-5)	10	179208
GOH 8x2 FL100 AISI316	2	120 x 240	465 x 490 x 60	280(+5/-5) x 305(+5/-5)	13.4	110472
GOH 8x3 FL100 AISI316	3	120 x 240	597.5 x 490 x 60	413(+5/-5) x 305(+5/-5)	16	104111
GOH 8x4 FL100 AISI316	4	120 x 240	730 x 490 x 60	545(+5/-5) x 305(+5/-5)	19.4	173441
GOH 2x1 FL100 GALV	1	120 x 60	332.5 x 313 x 60	148(+5/-5) x 128(+5/-5)	7	124009
GOH 2x2 FL100 GALV	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250893
GOH 2x2 FL100 AISI316	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250896
GOH 2x3 FL100 GALV	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250894
GOH 2x4 FL100 GALV	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	15	179978
GOH 4x1 FL100 GALV	1	120 x 120	332.5 x 371.5 x 60	148(+5/-5) x 187(+5/-5)	8.1	107250
GOH 4x2 FL100 GALV	2	120 x 120	465 x 371.5 x 60	280(+5/-5) x 187(+5/-5)	11	121490
GOH 4x3 FL100 GALV	3	120 x 120	597.5 x 371.5 x 60	413(+5/-5) x 187(+5/-5)	13.5	192221
GOH 4x4 FL100 GALV	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	18	121489
GOH 6x1 FL100 GALV	1	120 x 180	332.5 x 430 x 60	148(+5/-5) x 245(+5/-5)	7.4	179403
GOH 6x2 FL100 GALV	2	120 x 180	465 x 430 x 60	280(+5/-5) x 245(+5/-5)	12	179416
GOH 6x3 FL100 GALV	3	120 x 180	597.5 x 430 x 60	413(+5/-5) x 245(+5/-5)	15	179976
GOH 6x4 FL100 GALV	4	120 x 180	730 x 430 x 60	545(+5/-5) x 245(+5/-5)	18	119419
GOH 2x3 FL100 AISI316	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250897
GOH 8x1 FL100 GALV	1	120 x 240	332.5 x 490 x 60	148(+5/-5) x 305(+5/-5)	9	151629

Titre	Ouvertures de cadre	Espace de remplissage	Dimensions externes WxHxD	Dimensions d'ouverture w x h	Poids	N° art.
GOH 8x2 FL100 GALV	2	120 x 240	465 x 490 x 60	280(+5/-5) x 305(+5/-5)	13	150141
GOH 8x3 FL100 GALV	3	120 x 240	597.5 x 490 x 60	413(+5/-5) x 305(+5/-5)	17	155328
GOH 8x4 FL100 GALV	4	120 x 240	730 x 490 x 60	545(+5/-5) x 305(+5/-5)	20.3	121488
GOH 2x4 FL100 AISI316	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	14.9	250898
GOH 4x1 FL100 AISI316	1	120 x 120	332.5 x 371.5 x 60	148(+5/-5) x 187(+5/-5)	7.6	152890
GOH 4x2 FL100 AISI316	2	120 x 120	465 x 371.5 x 60	280(+5/-5) x 187(+5/-5)	10.8	215709
GOH 4x3 FL100 AISI316	3	120 x 120	597.5 x 371.5 x 60	413(+5/-5) x 187(+5/-5)	14	215812
GOH 4x4 FL100 AISI316	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	16.8	227620
GOH 6x1 FL100 AISI316	1	120 x 180	332.5 x 430 x 60	148(+5/-5) x 245(+5/-5)	8.6	157979

Eléments d'étanchéité

Eléments d'étanchéité


Accessoires



Plaque de maintien Roxtec




Kit d'étanchéité Roxtec



Module de compensation plein RM



Wedge et Wedgekit



Module RM avec Multidiameter™



Outils de maintien Roxtec



Outils de pré-compression Roxtec



Lubrifiant Roxtec

Pour plus d'informations, veuillez consulter [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-01-13