




Roxtec GOH FL100-gjennomføring

Åpningsbar gjennomføring for eksisterende kabler, inkludert en bred flens egnet for bolting til betongkonstruksjoner.

Roxtec GOH FL100 er en åpningsbar kabel- og rørtetning som muliggjør installasjon rundt kabler og rør som allerede er trukket. Den rektangulære stålrammen har en 100 mm bred flens med bolthull nær den ytre omkretsen for å sikre en korrekt feste og unngå risiko for sprekker. Gjennomføringen er det riktige valget ved bolting til betong.

- Perfekt for ettermontering
- Kan åpnes

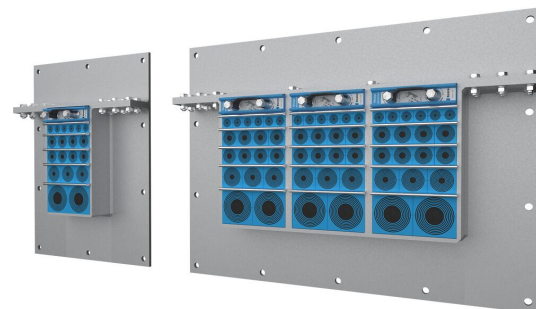

Produktegenskaper



Brannklassifisert



IP/UL NEMA

Struktur for installasjon



Betong



Murstein

Festetype



Bolting

Graderinger og sertifikater

Brann

- E/EI-klassifisering i henhold til EN 13501

Tetthet

- IP 68

Rammedimensjoner

mm/kg

Rammevariantene nedenfor er et begrenset utvalg. Du kan besøke [roxtec.com](https://www.roxtec.com) for det komplette utvalget av rammer og konfigurasjoner.


Tittel	Rammeåpninger	Fyllplass	Utvendige mål WxHxD	Utsparingsmål w x h	Vekt	Art.nr.
GOH 2x1 FL100 AISI316	1	120 x 60	332.5 x 313 x 60	148(+5/-5) x 128(+5/-5)	7	214791
GOH 6x2 FL100 AISI316	2	120 x 180	465 x 430 x 60	280(+5/-5) x 245(+5/-5)	12	164359
GOH 6x3 FL100 AISI316	3	120 x 180	597.5 x 430 x 60	413(+5/-5) x 245(+5/-5)	14.4	157824
GOH 6x4 FL100 AISI316	4	120 x 180	730 x 430 x 60	545(+5/-5) x 245(+5/-5)	18.7	125356
GOH 8x1 FL100 AISI316	1	120 x 240	332.5 x 490 x 60	148(+5/-5) x 305(+5/-5)	10	179208
GOH 8x2 FL100 AISI316	2	120 x 240	465 x 490 x 60	280(+5/-5) x 305(+5/-5)	13.4	110472
GOH 8x3 FL100 AISI316	3	120 x 240	597.5 x 490 x 60	413(+5/-5) x 305(+5/-5)	16	104111
GOH 8x4 FL100 AISI316	4	120 x 240	730 x 490 x 60	545(+5/-5) x 305(+5/-5)	19.4	173441
GOH 2x1 FL100 GALV	1	120 x 60	332.5 x 313 x 60	148(+5/-5) x 128(+5/-5)	7	124009
GOH 2x2 FL100 GALV	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250893
GOH 2x2 FL100 AISI316	2	120 x 60	465 x 313 x 60	280(+5/-5) x 128(+5/-5)	9.6	250896
GOH 2x3 FL100 GALV	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250894
GOH 2x4 FL100 GALV	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	15	179978
GOH 4x1 FL100 GALV	1	120 x 120	332.5 x 371.5 x 60	148(+5/-5) x 187(+5/-5)	8.1	107250
GOH 4x2 FL100 GALV	2	120 x 120	465 x 371.5 x 60	280(+5/-5) x 187(+5/-5)	11	121490
GOH 4x3 FL100 GALV	3	120 x 120	597.5 x 371.5 x 60	413(+5/-5) x 187(+5/-5)	13.5	192221
GOH 4x4 FL100 GALV	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	18	121489
GOH 6x1 FL100 GALV	1	120 x 180	332.5 x 430 x 60	148(+5/-5) x 245(+5/-5)	7.4	179403
GOH 6x2 FL100 GALV	2	120 x 180	465 x 430 x 60	280(+5/-5) x 245(+5/-5)	12	179416
GOH 6x3 FL100 GALV	3	120 x 180	597.5 x 430 x 60	413(+5/-5) x 245(+5/-5)	15	179976
GOH 6x4 FL100 GALV	4	120 x 180	730 x 430 x 60	545(+5/-5) x 245(+5/-5)	18	119419
GOH 2x3 FL100 AISI316	3	120 x 60	597.5 x 313 x 60	413(+5/-5) x 128(+5/-5)	12.2	250897
GOH 8x1 FL100 GALV	1	120 x 240	332.5 x 490 x 60	148(+5/-5) x 305(+5/-5)	9	151629



Tittel	Rammeåpninger	Fyllplass	Utvendige mål WxHxD	Utsparingsmål w x h	Vekt	Art.nr.
GOH 8x2 FL100 GALV	2	120 x 240	465 x 490 x 60	280(+5/-5) x 305(+5/-5)	13	150141
GOH 8x3 FL100 GALV	3	120 x 240	597.5 x 490 x 60	413(+5/-5) x 305(+5/-5)	17	155328
GOH 8x4 FL100 GALV	4	120 x 240	730 x 490 x 60	545(+5/-5) x 305(+5/-5)	20.3	121488
GOH 2x4 FL100 AISI316	4	120 x 60	730 x 313 x 60	545(+5/-5) x 128(+5/-5)	14.9	250898
GOH 4x1 FL100 AISI316	1	120 x 120	332.5 x 371.5 x 60	148(+5/-5) x 187(+5/-5)	7.6	152890
GOH 4x2 FL100 AISI316	2	120 x 120	465 x 371.5 x 60	280(+5/-5) x 187(+5/-5)	10.8	215709
GOH 4x3 FL100 AISI316	3	120 x 120	597.5 x 371.5 x 60	413(+5/-5) x 187(+5/-5)	14	215812
GOH 4x4 FL100 AISI316	4	120 x 120	730 x 371.5 x 60	545(+5/-5) x 187(+5/-5)	16.8	227620
GOH 6x1 FL100 AISI316	1	120 x 180	332.5 x 430 x 60	148(+5/-5) x 245(+5/-5)	8.6	157979

Tetningskomponentdata


Tetningskomponenter



Stagplate




kit-løsning



RM blindmodul



Wedge og Wedgekit



RM-modul med
Multidiameter™



holderverktøy



prekompresjonsverktøy



smøremiddel

For ytterligere informasjon, kan du besøke www.roxtec.com.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-01-13



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.