




Roxtec R-gennemføring med SL R til plastrør

Rund gennemføring til flere termoplastiske rør

Roxtec R-gennemføringen til termoplastiske rør fås i flere størrelser for at dække forskellige behov i forbindelse med fyldningsforhold eller pladstilgængelighed. Kompressionen er integreret i gennemføringsrammen, så hele den firkantede åbning kan konfigureres med tætningsmoduler. Roxtec SL R-sleeven fastgøres til strukturen ved svejsning.

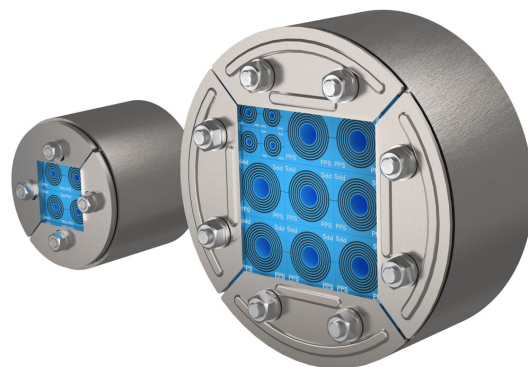

- Pladsbesparende
- Nem at vedligeholde og inspicere

Produktgenskaber



Brandklassificeret



Vandtæt



Gastæt

Byggekonstruktion



Metal

Monteringstype



Oprindeligt sleeve



Svejsning

Normeringer og certifikater

Brand

- A-KLASSE i henhold til IMO 2010 FTP-kode

Tæthed

- Gas: 1 bar (katastrofe)
- Vand: 2 bar (katastrofe)

Rammedimensioner

mm/kg


De nedenstående rammevarianter udgør et begrænset udvalg. Du kan se hele udvalget af rammer og konfigurationer på [roxtec.com](https://www.roxtec.com).

Title	Pakkeareal	Åbningsmål Ø	Vægt	Art.-nr.
R 50 AISI316	30 x 30	50 - 52	0.21	5R00000012875
R 75 AISI316	40 x 40	75 - 77	0.5	R000000751021
R 70 AISI316	40 x 40	70 - 72	0.45	R000000701021
R 100 AISI316	60 x 60	100 - 102	0.8	R000001001021
R 100 GALV	60 x 60	100 - 102	0.8	R000001001018
R 125 AISI316	80 x 80	125 - 127	1.1	R000001251021
R 125 GALV	80 x 80	125 - 127	1.1	R000001251018
R 127 AISI316	80 x 80	127 - 129	1.1	R000001271021
R 127 GALV	80 x 80	127 - 129	1.1	R000001271018
R 150 AISI316	90 x 90	150 - 152	1.6	R000001501021
R 150 GALV	90 x 90	150 - 152	1.6	R000001501018
R 200 AISI316	120 x 120	200 - 202	2.6	R000002001021
R 200 GALV	120 x 120	200 - 202	2.6	R000002001018




Data om tætningskomponenter

Tætningskomponenter




RM fast kompensationsmodul



RM-modul med Multidiameter™



Lubrikant



RM PPS-modul med Multidiameter™



SL R-sleeve

For merne information, besøg venligst [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-05



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.