




Roxtec R transit with SL R for plastic pipes

Round transit for multiple thermoplastic pipes.

The Roxtec R transit for thermoplastic pipes is available in several sizes to cover different needs related to fill ratio or space availability. The compression is integrated into the transit frame so the entire square opening can be configured with sealing modules. The Roxtec SL R sleeve is attached to the structure by welding.

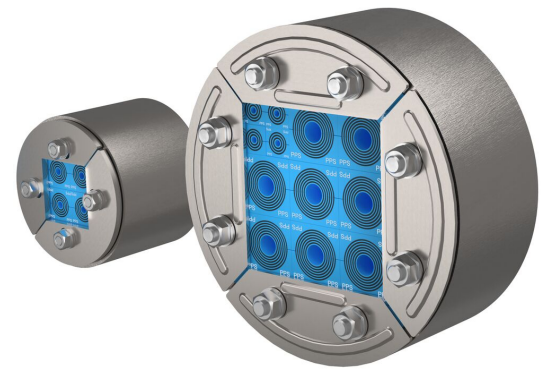

- Area efficient
- Easy to maintain and inspect

Product characteristics



Fire rated



Watertight



Gas-tight

Structure of installation



Metal

Mounting type



Existing sleeve



Welding

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code

Tightness

- Gas: 1 bar (catastrophic)
- Water: 2 bar (catastrophic)

Frame dimensions

in/lbs

The frame variants below are a limited selection. For the full range of frames and configurations, please visit [roxtec.com](https://www.roxtec.com).

Product	Packing space	Aperture dimensions Ø	Weight	Art. no
R 50 AISI316	1.181 x 1.181	1.969 - 2.047	0.46	5R00000012875
R 75 AISI316	1.575 x 1.575	2.953 - 3.031	1.12	R000000751021
R 70 AISI316	1.575 x 1.575	2.756 - 2.835	0.99	R000000701021
R 100 AISI316	2.362 x 2.362	3.937 - 4.016	1.83	R000001001021
R 100 GALV	2.362 x 2.362	3.937 - 4.016	1.87	R000001001018
R 125 AISI316	3.15 x 3.15	4.921 - 5	2.43	R000001251021
R 125 GALV	3.15 x 3.15	4.921 - 5	2.43	R000001251018
R 127 AISI316	3.15 x 3.15	5 - 5.079	2.43	R000001271021
R 127 GALV	3.15 x 3.15	5 - 5.079	2.43	R000001271018
R 150 AISI316	3.543 x 3.543	5.906 - 5.984	3.53	R000001501021
R 150 GALV	3.543 x 3.543	5.906 - 5.984	3.53	R000001501018
R 200 AISI316	4.724 x 4.724	7.874 - 7.953	5.73	R000002001021
R 200 GALV	4.724 x 4.724	7.874 - 7.953	5.73	R000002001018




Sealing components


Sealing components



RM PPS module with Multidiameter™



RM solid compensation module



RM module with Multidiameter™



Lubricant



SL R sleeve

For detailed information, please visit [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-08-11



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.