




Passaggio Roxtec R con SL R per tubi in plastica

Passaggio rotondo per più tubi termoplastici

Il passaggio Roxtec R per tubi termoplastici è disponibile in diverse dimensioni per coprire le diverse esigenze legate al rapporto di riempimento o alla disponibilità di spazio. La compressione è integrata nel telaio di transito in modo che l'intera apertura quadrata possa essere configurata con moduli di tenuta. Il manicotto Roxtec SL R è fissato alla struttura mediante saldatura.

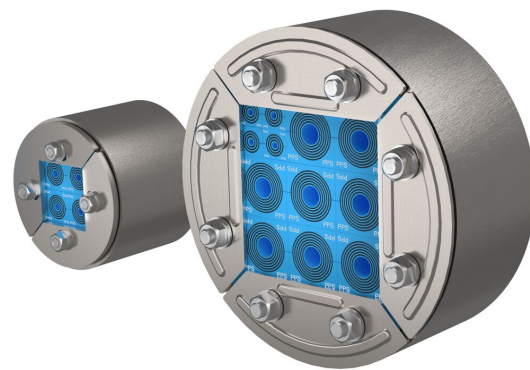

- Compatto
- Facilità di manutenzione e controllo

Caratteristiche



Resistenza al fuoco



A tenuta stagna



A tenuta di gas

Struttura dell'installazione



Metallo

Tipo di montaggio



Manicotto esistente



Saldatura

Ratings e certificati

Fuoco

- CLASSE A secondo IMO 2010 FTP Code

Tenuta

- Gas: 1 bar (catastrofico)
- Acqua: 2 bar (catastrofico)

Dimensioni telaio

mm/kg


Le varianti di telaio seguenti rappresentano una selezione limitata. Per la gamma completa di telai e configurazioni, visita [roxtec.com](https://www.roxtec.com).

Titolo	Spazio di riempimento	Dimensioni apertura Ø	Peso	Art. Nr.
R 50 AISI316	30 x 30	50 - 52	0.21	5R00000012875
R 75 AISI316	40 x 40	75 - 77	0.5	R000000751021
R 70 AISI316	40 x 40	70 - 72	0.45	R000000701021
R 100 AISI316	60 x 60	100 - 102	0.8	R000001001021
R 100 GALV	60 x 60	100 - 102	0.8	R000001001018
R 125 AISI316	80 x 80	125 - 127	1.1	R000001251021
R 125 GALV	80 x 80	125 - 127	1.1	R000001251018
R 127 AISI316	80 x 80	127 - 129	1.1	R000001271021
R 127 GALV	80 x 80	127 - 129	1.1	R000001271018
R 150 AISI316	90 x 90	150 - 152	1.6	R000001501021
R 150 GALV	90 x 90	150 - 152	1.6	R000001501018
R 200 AISI316	120 x 120	200 - 202	2.6	R000002001021
R 200 GALV	120 x 120	200 - 202	2.6	R000002001018




Dati relativi ai componenti

Componenti per la sigillatura




Blocco di riempimento RM




Modulo RM con Multidiameter™



Lubrificante



Modulo RM PPS con Multidiameter™



Manicotto SL R

Per informazioni dettagliate, visita la pagina [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-05

