




Roxtec R transit with SL R for plastic pipes

Round transit for multiple thermoplastic pipes

The Roxtec R transit for thermoplastic pipes is available in several sizes to cover different needs related to fill ratio or space availability. The compression is integrated into the transit frame so the entire square opening can be configured with sealing modules. The Roxtec SL R sleeve is attached to the structure by welding.

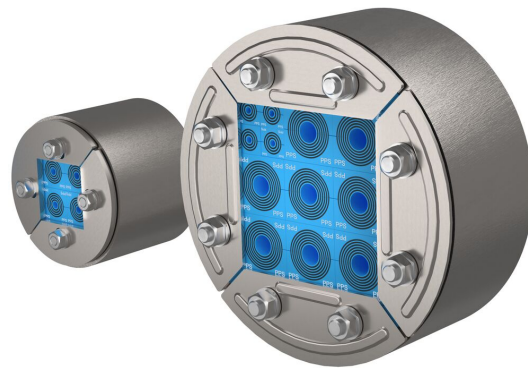

- 優れた面積効率
- メンテナンスと検査が容易

製品特性



耐火



防水



気密

設置構造



金属

取り付けタイプ



既設スリー



溶接

規格と認証証明書

火災

- A 級 IMO 2010 FTP コードに基づく試験

密性

- ガス: 1 バール (衝撃圧)
- 水: 2 バール (衝撃圧)

フレーム寸法

mm/kg



以下のフレームは一部です。フレームと構成品の全ラインナップについては、[roxtec.com](https://www.roxtec.com) をご覧ください。

タイトル	パッキンスペース	開口部寸法 φ	重量	部品番号
R 50 AISI316	30 x 30	50 - 52	0.21	5R00000012875
R 75 AISI316	40 x 40	75 - 77	0.5	R000000751021
R 70 AISI316	40 x 40	70 - 72	0.45	R000000701021
R 100 AISI316	60 x 60	100 - 102	0.8	R000001001021
R 100 GALV	60 x 60	100 - 102	0.8	R000001001018
R 125 AISI316	80 x 80	125 - 127	1.1	R000001251021
R 125 GALV	80 x 80	125 - 127	1.1	R000001251018
R 127 AISI316	80 x 80	127 - 129	1.1	R000001271021
R 127 GALV	80 x 80	127 - 129	1.1	R000001271018
R 150 AISI316	90 x 90	150 - 152	1.6	R000001501021
R 150 GALV	90 x 90	150 - 152	1.6	R000001501018
R 200 AISI316	120 x 120	200 - 202	2.6	R000002001021
R 200 GALV	120 x 120	200 - 202	2.6	R000002001018



シーリングコンポーネントのデータ


シーリングコンポーネント

RM ソリッドコンペ ンセーション
モジュ

Multidiameter™ 付き RM



潤滑剤



RM PPS mod ule with M ultidiamet



SL R スリーブ

詳細情報については、[roxtec.com](https://www.roxtec.com) をご覧ください。

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-05



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.