




플라스틱 파이프용 SL R이 있는 Roxtec R 트랜짓

다중 열가소성 파이프용 원형 트랜짓

열가소성 파이프용 Roxtec R 트랜짓은 충진율 또는 공간 가용성과 관련된 다양한 요구 사항을 충족하기 위해 여러 크기로 제공됩니다. 압축은 트랜짓 프레임에 통합되어 전체 정사각형 관통부를 씰링 모듈로 구성할 수 있습니다. Roxtec SL R 슬리브는 용접을 통해 구조물에 부착됩니다.

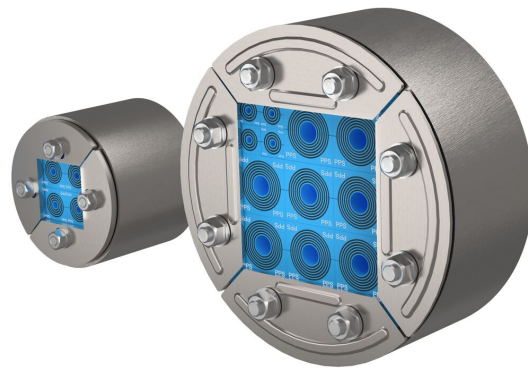

- 공간 효율성
- 유지 및 검사 용이

제품 특징점



내화



방수



가스누출

설치 구조



금속

장착 유형



기존 슬리



용접

등급 및 인증

화재

- IMO 2010 FTP 코드에 따른 A등급

강도

- 가스: 1 Bar(일시적인)
- 물: 2 Bar(일시적인)

프레임 치수

mm/kg


아래의 프레임 변화는 제한된 선택입니다. 프레임 및 구성의 전체 범위를 보려면 [roxtec.com](https://www.roxtec.com)을 방문하십시오.

구성	모듈설치공간	홀 치수 Ø	무게	Art. 번호
R 50 AISI316	30 x 30	50 - 52	0.21	5R00000012875
R 75 AISI316	40 x 40	75 - 77	0.5	R000000751021
R 70 AISI316	40 x 40	70 - 72	0.45	R000000701021
R 100 AISI316	60 x 60	100 - 102	0.8	R000001001021
R 100 GALV	60 x 60	100 - 102	0.8	R000001001018
R 125 AISI316	80 x 80	125 - 127	1.1	R000001251021
R 125 GALV	80 x 80	125 - 127	1.1	R000001251018
R 127 AISI316	80 x 80	127 - 129	1.1	R000001271021
R 127 GALV	80 x 80	127 - 129	1.1	R000001271018
R 150 AISI316	90 x 90	150 - 152	1.6	R000001501021
R 150 GALV	90 x 90	150 - 152	1.6	R000001501018
R 200 AISI316	120 x 120	200 - 202	2.6	R000002001021
R 200 GALV	120 x 120	200 - 202	2.6	R000002001018




씰링 컴포넌트 데이터

씰링 컴포넌트




RM 솔리드 모듈



RM 모듈(Multidiameter™)



윤활제



RM PPS 모듈(Multidiameter)



SL R 슬리브

자세한 내용은 [roxtec.com](https://www.roxtec.com)을 방문하십시오.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-05



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.