




Przepust Roxtec R z SL R do rur z tworzyw sztucznych

Przepust okrągły dla wielu rur termoplastycznych

Przepust Roxtec R do rur termoplastycznych jest dostępny w kilku rozmiarach, aby zaspokoić różne potrzeby związane ze współczynnikiem wypełnienia lub dostępnością miejsca. Zacisk jest zintegrowany z ramą przepustową, dzięki czemu cały kwadratowy otwór można skonfigurować za pomocą modułów uszczelniających. Tuleja Roxtec SL R jest mocowana do konstrukcji za pomocą spawania.

- Kompaktowe
- Łatwe do kontrolowania i konserwowania

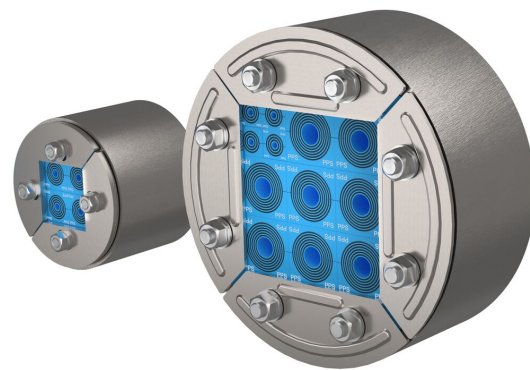

Charakterystyka produktu



Ogniodopusne



Wodoszczelne



Gazoszczelne

Struktura podłoża instalacyjnego



Metal

Sposób montażu



Istniejąca tuleja



Spawanie

Klasy i certyfikaty

Ogień

- KLASA A zgodnie z kodeksem IMO 2010 FTP

Szczelność

- Gaz: 1 bar (katastroficzne)
- Woda: 2 bar (katastroficzne)

Wymiary ramy

mm/kg


Poniżej przedstawiono tylko kilka przykładowych wariantów ram. Pełna oferta ram i konfiguracji jest dostępna w witrynie [roxtec.com](https://www.roxtec.com).

Tytuł	Przestrzeń uszczelniana	Wymiary otworu Ø	Waga	Nr katalogowy
R 50 AISI316	30 x 30	50 - 52	0.21	5R00000012875
R 75 AISI316	40 x 40	75 - 77	0.5	R000000751021
R 70 AISI316	40 x 40	70 - 72	0.45	R000000701021
R 100 AISI316	60 x 60	100 - 102	0.8	R000001001021
R 100 GALV	60 x 60	100 - 102	0.8	R000001001018
R 125 AISI316	80 x 80	125 - 127	1.1	R000001251021
R 125 GALV	80 x 80	125 - 127	1.1	R000001251018
R 127 AISI316	80 x 80	127 - 129	1.1	R000001271021
R 127 GALV	80 x 80	127 - 129	1.1	R000001271018
R 150 AISI316	90 x 90	150 - 152	1.6	R000001501021
R 150 GALV	90 x 90	150 - 152	1.6	R000001501018
R 200 AISI316	120 x 120	200 - 202	2.6	R000002001021
R 200 GALV	120 x 120	200 - 202	2.6	R000002001018




Dane elementów uszczelniających

Elementy uszczelniające




Pełny moduł kompensujący RM



Moduł RM z technologią Multidiameter™



Lubricant



Moduł RM PPS z technologią Multidiameter™



Tuleja SL R

Szczegółowe informacje można znaleźć na [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-05



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.