



GK Firestop sealing kit

Area efficient transit for cables, cable bundles or busbars.

The GK Firestop sealing kit is for use in sleeves in above waterline applications on ships and vessels. It combines cold smoke tightness with fire prevention as its integrated intumescent material expands to close the void in case of fire or a rise in temperature to over 150°C. The kit can be installed in a wide range of circular or oval sleeves, and it does not require any additional insulation for A-60 or A-0 applications.



- Area efficient
- Quick and easy to install

Product characteristics



Fire rated

Structure of installation



Metal

Mounting type



Bolting



Welding



Existing sleeve

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code

Sealing components

Sealing components




GK FS SK

For detailed information, please visit [roxtec.com](https://www.roxtec.com).



Pre-configured transit kits

mm/kg

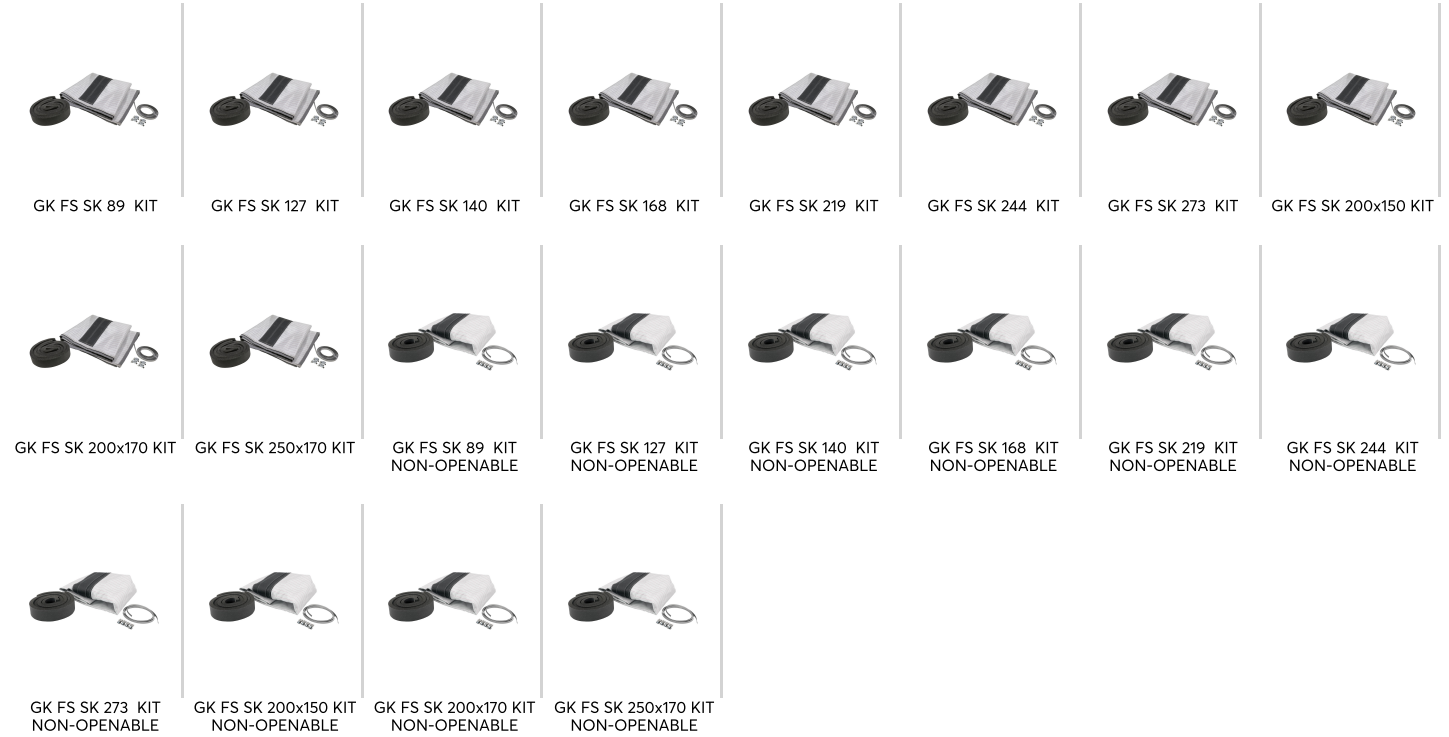

| Product | Configuration | Aperture dimensions Ø | Weight | Art. no |
|-----------------------------------|---------------|--------------------------|--------|---------|
| GK FS SK 89 KIT | | 84 - 89 | 0.7 | 197464 |
| GK FS SK 127 KIT | | 107 - 127 | 1 | 197465 |
| GK FS SK 140 KIT | | 120 - 140 | 0.8 | 197466 |
| GK FS SK 168 KIT | | 138 - 168 | 1.2 | 197467 |
| GK FS SK 219 KIT | | 179 - 219 | 1.6 | 197468 |
| GK FS SK 244 KIT | | 204 - 244 | 1.8 | 197469 |
| GK FS SK 273 KIT | | 233 - 273 | 1.9 | 197470 |
| GK FS SK 200x150 KIT | | 169 - 182 | 1.3 | 197472 |
| GK FS SK 200x170 KIT | | 176 - 189 | 1.4 | 197474 |
| GK FS SK 250x170 KIT | | 208 - 224 | 1.6 | 197475 |
| GK FS SK 89 KIT NON-OPENABLE | | 84 - 89 | 0.6 | 197823 |
| GK FS SK 127 KIT NON-OPENABLE | | 107 - 127 | 0.7 | 197817 |
| GK FS SK 140 KIT NON-OPENABLE | | 120 - 140 | 0.7 | 197820 |
| GK FS SK 168 KIT NON-OPENABLE | | 138 - 168 | 1.1 | 197821 |
| GK FS SK 219 KIT NON-OPENABLE | | 179 - 219 | 1.4 | 197824 |
| GK FS SK 244 KIT NON-OPENABLE | | 204 - 244 | 1.6 | 197825 |
| GK FS SK 273 KIT NON-OPENABLE | | 233 - 273 | 2.3 | 197814 |
| GK FS SK 200x150 KIT NON-OPENABLE | | 169 - 182 | 1.2 | 197813 |
| GK FS SK 200x170 KIT NON-OPENABLE | | 176 - 189 | 1.3 | 197818 |
| GK FS SK 250x170 KIT NON-OPENABLE | | 208 - 224 | 1.5 | 197822 |

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-07-02

