



# Kit de sellado contra incendios GK

Este sello presenta una gran eficiencia de área para cables, grupos de cables o pletinas.

El kit de sellado GK Firestop está indicado para su uso con manguitos en aplicaciones por encima de la línea de agua en barcos y buques. Combina la estanqueidad al humo con la prevención de incendios, gracias a que su material intumescente integrado se expande para cerrar cualquier hueco en caso de fuego o de que la temperatura aumente por encima de 150 °C. El kit se puede instalar en una gran variedad de manguitos circulares u ovalados y no requiere ningún aislamiento adicional para las aplicaciones A-60 o A-0.

- Eficiencia de área
- Rápido y sencillo de instalar



## Características del producto



Calificación contra incendios

## Estructura de instalación



Metal

## Tipo de montaje



Atornilladura



Soldadura



Manguito existente

## Calificaciones y certificados

### Fuego

- CLASE A de acuerdo al estándar FTP IMO 2010

## Datos de los componentes de sellado

### Componentes de sellado




GK FS SK

Para obtener información detallada, visite [roxtec.com](https://www.roxtec.com).



# Kits de sellos preconfigurados

mm/kg

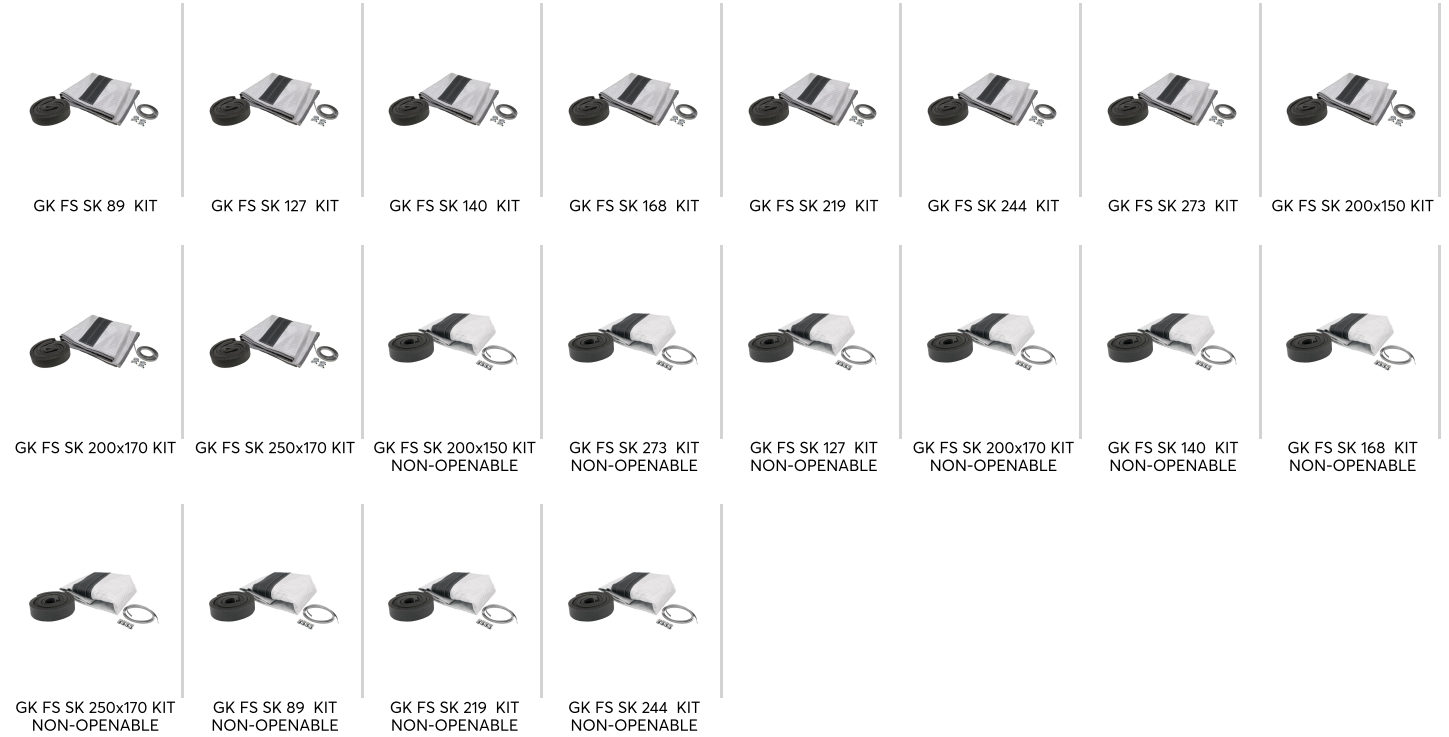

Título	Configuración	Dimensiones de abertura Ø	Peso	N.º de art.
GK FS SK 89 KIT		84 - 89	0.7	197464
GK FS SK 127 KIT		107 - 127	1	197465
GK FS SK 140 KIT		120 - 140	0.8	197466
GK FS SK 168 KIT		138 - 168	1.2	197467
GK FS SK 219 KIT		179 - 219	1.6	197468
GK FS SK 244 KIT		204 - 244	1.8	197469
GK FS SK 273 KIT		233 - 273	1.9	197470
GK FS SK 200x150 KIT		169 - 182	1.3	197472
GK FS SK 200x170 KIT		176 - 189	1.4	197474
GK FS SK 250x170 KIT		208 - 224	1.6	197475
GK FS SK 200x150 KIT NON-OPENABLE		169 - 182	1.2	197813
GK FS SK 273 KIT NON-OPENABLE		233 - 273	2.3	197814
GK FS SK 127 KIT NON-OPENABLE		107 - 127	0.7	197817
GK FS SK 200x170 KIT NON-OPENABLE		176 - 189	1.3	197818
GK FS SK 140 KIT NON-OPENABLE		120 - 140	0.7	197820
GK FS SK 168 KIT NON-OPENABLE		138 - 168	1.1	197821
GK FS SK 250x170 KIT NON-OPENABLE		208 - 224	1.5	197822
GK FS SK 89 KIT NON-OPENABLE		84 - 89	0.6	197823
GK FS SK 219 KIT NON-OPENABLE		179 - 219	1.4	197824
GK FS SK 244 KIT NON-OPENABLE		204 - 244	1.6	197825

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-05