



Zestaw uszczelniający GK Firestop

Kompaktowy przepust dla kabli, wiązek kabli i szyn kablowych.

Zestaw uszczelniający GK Firestop jest przeznaczony do uszczelniania tulei powyżej linii wody na statkach i okrętach. Łączy w sobie szczelność na zimny dym z ochroną przeciwpożarową, ponieważ zintegrowany materiał pęczniający zwiększa swoją objętość, zamkając pustą przestrzeń podczas pożaru lub gdy temperatura przekroczy 150°C.

Zestaw można zamontować w szerokiej gamie okrągłych lub owalnych tulei i nie wymaga dodatkowej izolacji w zastosowaniach klasy odporności ogniowej A-60 lub A-0.



GK

- Kompaktowe
- Szybka i łatwa instalacja

Charakterystyka produktu



Ogniodporne

Struktura podłożu instalacyjnego



Metal

Sposób montażu



Przykręcanie śrubami



Spawanie



Istniejąca tuleja

Klasy i certyfikaty

Ogień

- KLASA A zgodnie z kodeksem IMO 2010 FTP

Dane elementów uszczelniających

Elementy uszczelniające




GK FS SK

Szczegółowe informacje można znaleźć na [roxtec.com](https://www.roxtec.com).



Gotowe zestawy przepustów

mm/kg

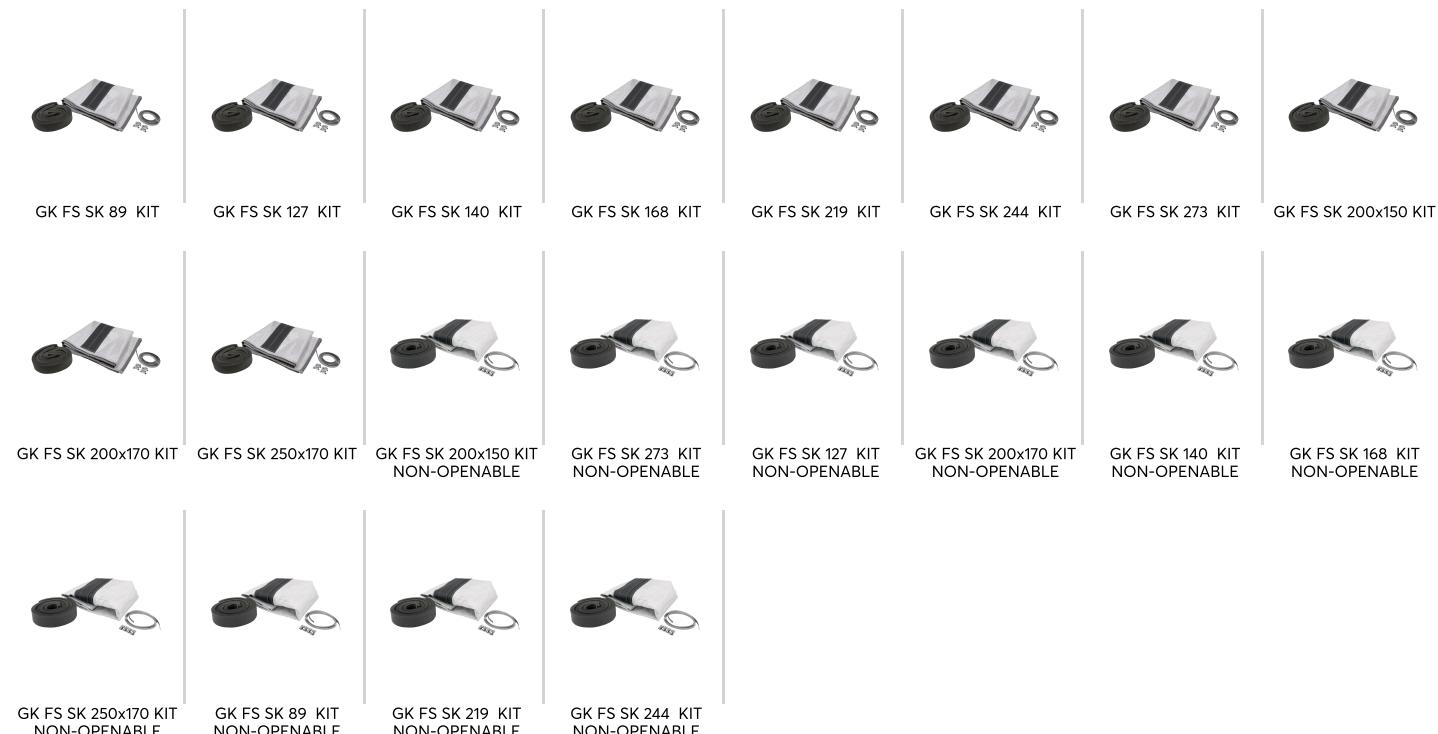

Tytuł	Konfiguracja	Wymiary otworu Ø	Waga	Nr katalogowy
GK FS SK 89 KIT		84 - 89	0.7	197464
GK FS SK 127 KIT		107 - 127	1	197465
GK FS SK 140 KIT		120 - 140	0.8	197466
GK FS SK 168 KIT		138 - 168	1.2	197467
GK FS SK 219 KIT		179 - 219	1.6	197468
GK FS SK 244 KIT		204 - 244	1.8	197469
GK FS SK 273 KIT		233 - 273	1.9	197470
GK FS SK 200x150 KIT		169 - 182	1.3	197472
GK FS SK 200x170 KIT		176 - 189	1.4	197474
GK FS SK 250x170 KIT		208 - 224	1.6	197475
GK FS SK 200x150 KIT NON-OPENABLE		169 - 182	1.2	197813
GK FS SK 273 KIT NON-OPENABLE		233 - 273	2.3	197814
GK FS SK 127 KIT NON-OPENABLE		107 - 127	0.7	197817
GK FS SK 200x170 KIT NON-OPENABLE		176 - 189	1.3	197818
GK FS SK 140 KIT NON-OPENABLE		120 - 140	0.7	197820
GK FS SK 168 KIT NON-OPENABLE		138 - 168	1.1	197821
GK FS SK 250x170 KIT NON-OPENABLE		208 - 224	1.5	197822
GK FS SK 89 KIT NON-OPENABLE		84 - 89	0.6	197823
GK FS SK 219 KIT NON-OPENABLE		179 - 219	1.4	197824
GK FS SK 244 KIT NON-OPENABLE		204 - 244	1.6	197825

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-05