



Soluția de etanșare GK Firestop

Tranzit cu zonă compactă pentru cabluri, mănușchiuri de cabluri sau bare colectoare.

Soluția GK Firestop este destinată utilizării în manșoane din aplicații existente deasupra liniei de plutire pe vapoare și nave. Combină etanșeitatea la fum rece cu prevenirea incendiilor, deoarece materialul intumescent integrat expandează pentru a închide golul în caz de incendiu, sau dacă temperatura crește la peste 150 °C. Soluția poate fi instalată într-o gamă largă de manșoane circulare sau ovale și nu necesită nicio izolație suplimentară pentru aplicațiile A-60 sau A-0.



GK

- Eficacitatea suprafeței
- Rapid și ușor de instalat

Caracteristicile produsului



Certificată la foc

Structura instalației



Metal

Tip de montaj



Prindere în șuruburi



Sudare



Piesă de trecere existentă

Clase și certificate

Foc

- CLASA A conform Codului FTP IMO 2010

Date componente de etanșare

Componente de etanșare




GK FS SK

Pentru mai multe informații, vă rugăm să vizitați [roxtec.com](https://www.roxtec.com).



Kituri de treceri preconfigurate

mm/kg

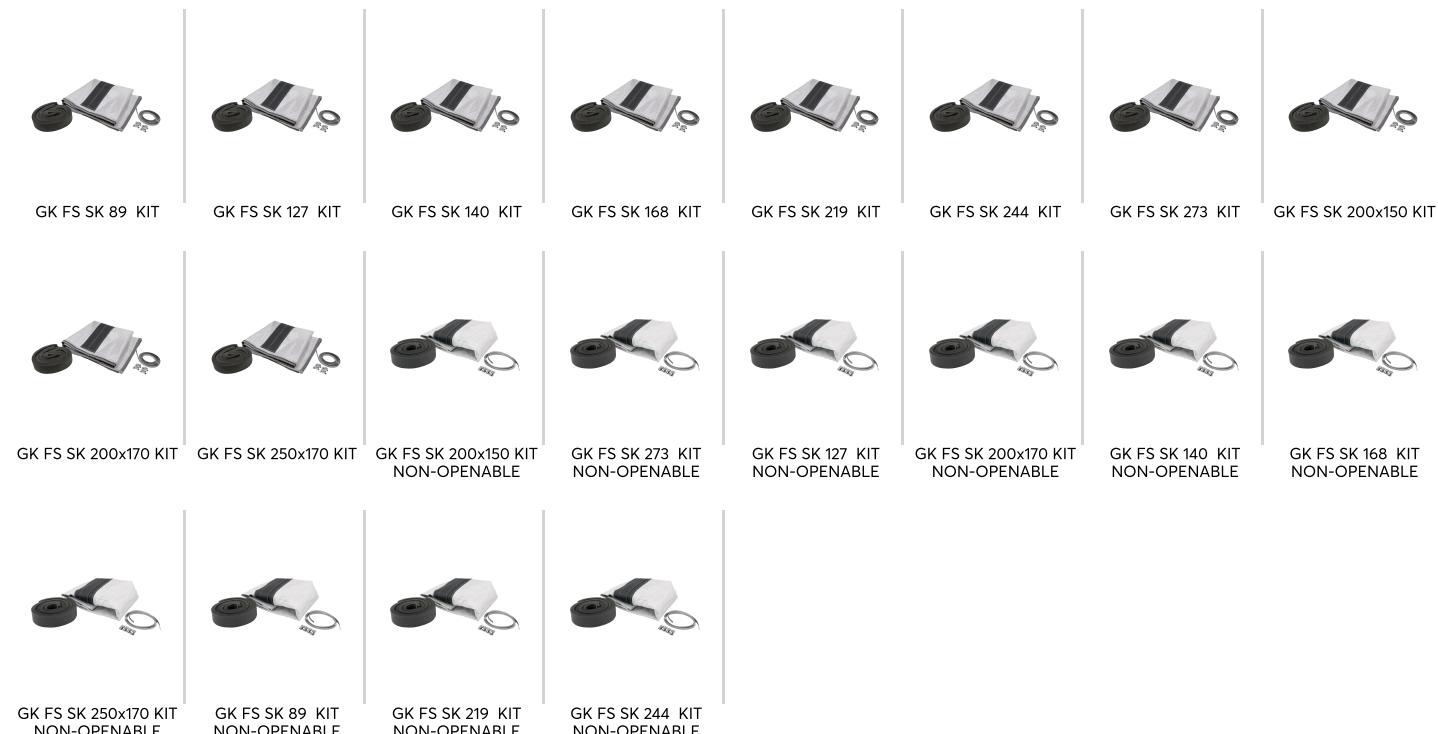

Titlu	Configurație	Dimensiuni deschidere Ø	Greutate	Nr. art.
GK FS 89 KIT		84 - 89	0.7	197464
GK FS 127 KIT		107 - 127	1	197465
GK FS 140 KIT		120 - 140	0.8	197466
GK FS 168 KIT		138 - 168	1.2	197467
GK FS 219 KIT		179 - 219	1.6	197468
GK FS 244 KIT		204 - 244	1.8	197469
GK FS 273 KIT		233 - 273	1.9	197470
GK FS 200x150 KIT		169 - 182	1.3	197472
GK FS 200x170 KIT		176 - 189	1.4	197474
GK FS 250x170 KIT		208 - 224	1.6	197475
GK FS 200x150 KIT NON-OPENABLE		169 - 182	1.2	197813
GK FS 273 KIT NON-OPENABLE		233 - 273	2.3	197814
GK FS 127 KIT NON-OPENABLE		107 - 127	0.7	197817
GK FS 200x170 KIT NON-OPENABLE		176 - 189	1.3	197818
GK FS 140 KIT NON-OPENABLE		120 - 140	0.7	197820
GK FS 168 KIT NON-OPENABLE		138 - 168	1.1	197821
GK FS 250x170 KIT NON-OPENABLE		208 - 224	1.5	197822
GK FS 89 KIT NON-OPENABLE		84 - 89	0.6	197823
GK FS 219 KIT NON-OPENABLE		179 - 219	1.4	197824
GK FS 244 KIT NON-OPENABLE		204 - 244	1.6	197825

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtect.com/en/about-us/about-roxtect/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-05