




# Bague coupe-feu Roxtec Sleev-it™

Bague coupe-feu pour tuyauterie en plastique unique.

La bague coupe-feu Roxtec Sleev-it™ est une solution légère ouvrable pour tuyauterie en plastique unique utilisée dans les secteurs classés résistants au feu. Le cadre en métal du passage est soudé par points directement à la structure et ne nécessite pas de manchon. Le boîtier en acier inoxydable contient des couches d'un matériau intumescence qui réagit à la chaleur pour protéger le passage une fois que la tuyauterie en plastique commence à se ramollir. La solution étanche est ouvrable et peut être installée après la pose du système de tuyauterie. Elle est ainsi idéale pour les projets de rénovation.

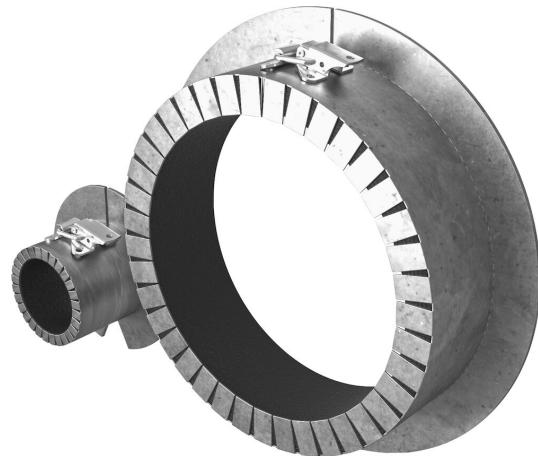

- Léger
- Surface optimisée
- Installation facile et rapide

## Caractéristiques du produit



Coupe-feu

## Structure d'installation



Métal

## Type de fixation



Soudage

## Classements et certificats

### Feu

- CLASSE A conformément au code FTP IMO 2010
- CLASSE B conformément au code FTP IMO 2010

## Éléments d'étanchéité

### Éléments d'étanchéité



Bague coupe-feu Sleev-it™

Pour plus d'informations, veuillez consulter [roxtect.com](https://www.roxtect.com).

### Accessoires




Mastic résistant au feu  
Roxtec



## Kits de passage préconfigurés

mm/kg

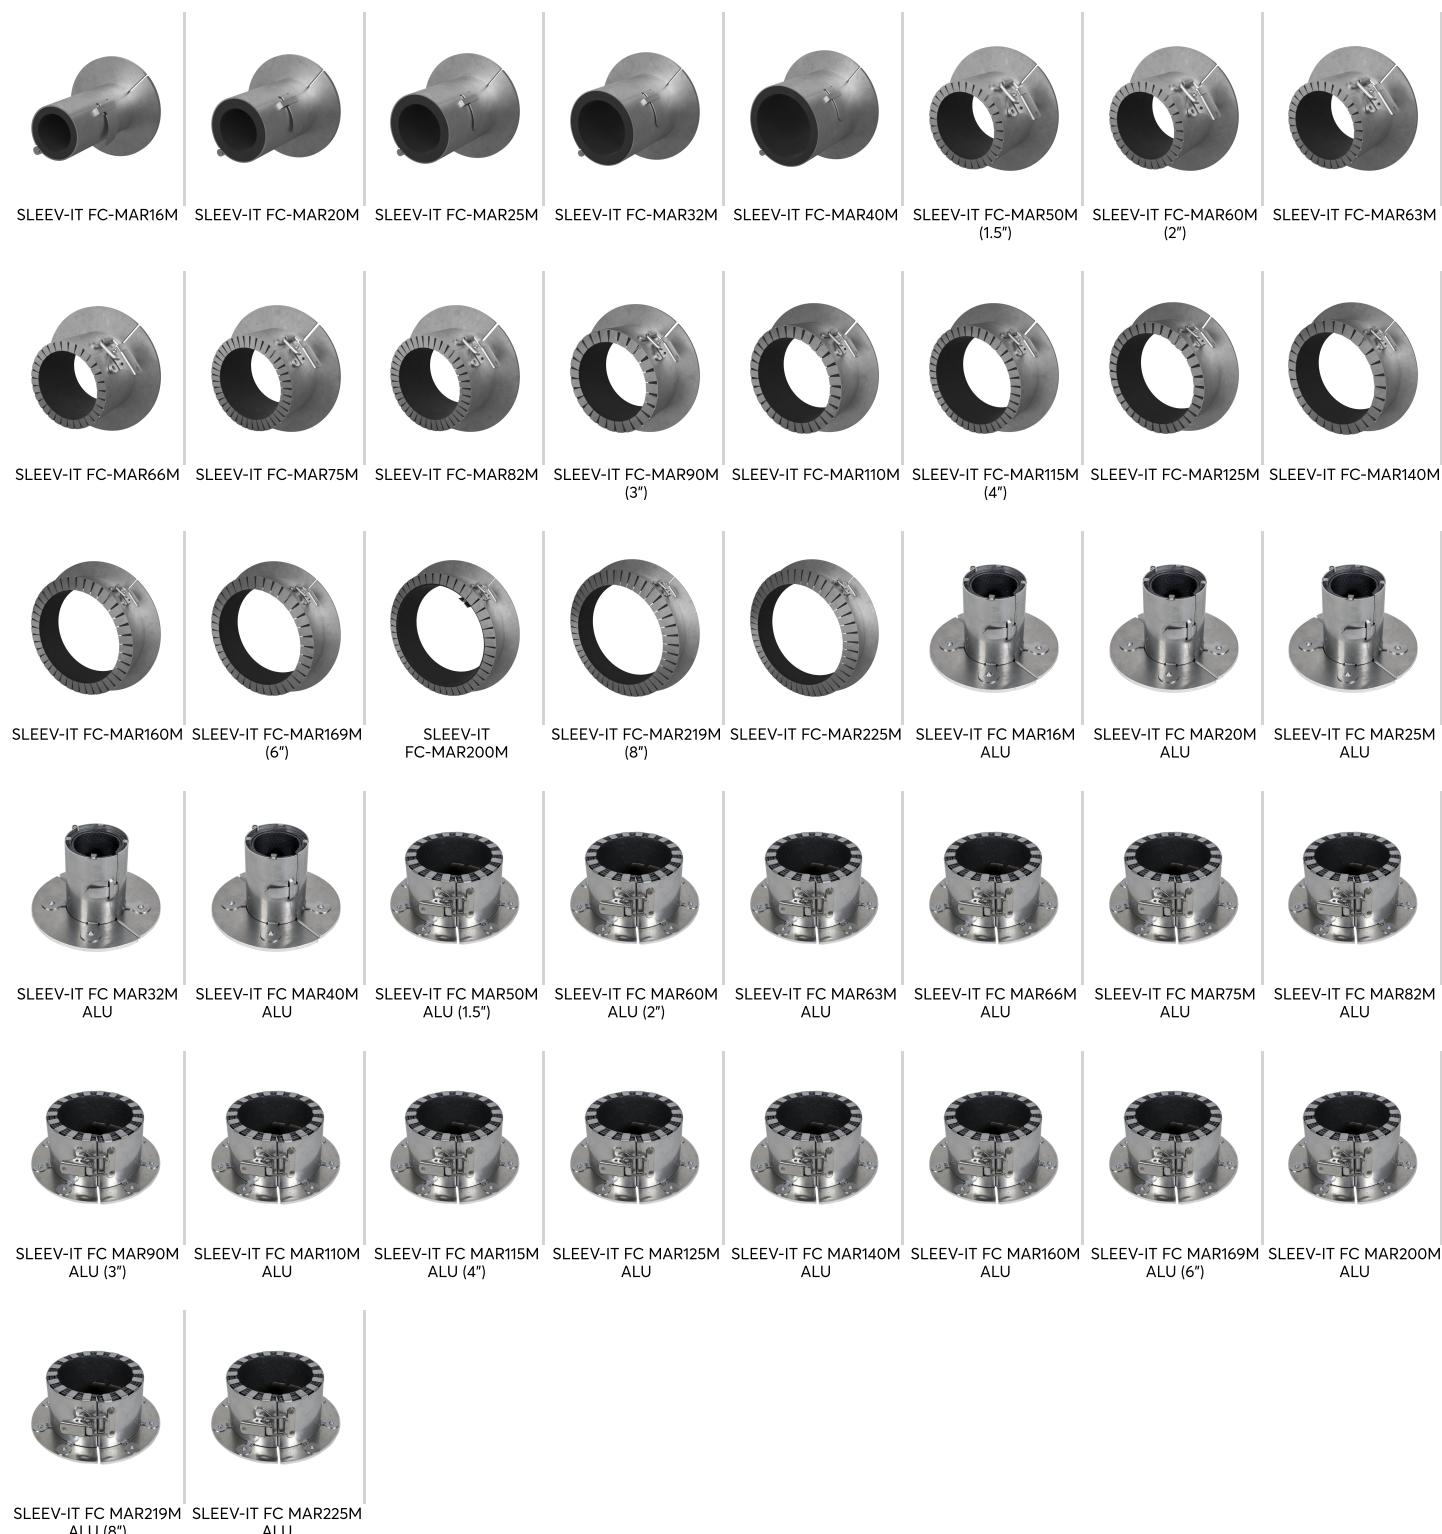



Titre	Configuration	Dimensions d'ouverture Ø	Poids	N° art.
SLEEV-IT FC-MAR16M		18 - 26	0.11	106239
SLEEV-IT FC-MAR20M		22 - 30	0.13	106245
SLEEV-IT FC-MAR25M		27 - 35	0.14	106247
SLEEV-IT FC-MAR32M		34 - 42	0.17	106249
SLEEV-IT FC-MAR40M		42 - 50	0.21	106251
SLEEV-IT FC-MAR50M (1.5")		50 - 58	0.36	106253
SLEEV-IT FC-MAR60M (2")		62 - 70	0.4	106255
SLEEV-IT FC-MAR63M		65 - 73	0.41	106257
SLEEV-IT FC-MAR66M		68 - 76	0.5	117916
SLEEV-IT FC-MAR75M		77 - 85	0.6	106259
SLEEV-IT FC-MAR82M		84 - 92	0.6	117919
SLEEV-IT FC-MAR90M (3")		91 - 99	0.7	106261
SLEEV-IT FC-MAR110M		112 - 120	0.8	106263
SLEEV-IT FC-MAR115M (4")		116 - 124	0.8	106265
SLEEV-IT FC-MAR125M		127 - 135	0.9	106267
SLEEV-IT FC-MAR140M		142 - 150	1	106269
SLEEV-IT FC-MAR160M		162 - 170	1.3	106271
SLEEV-IT FC-MAR169M (6")		170 - 178	1.4	106273
SLEEV-IT FC-MAR200M		202 - 210	1.9	106275
SLEEV-IT FC-MAR219M (8")		221 - 229	2	106278
SLEEV-IT FC-MAR225M		227 - 235	2.1	106280
SLEEV-IT FC MAR16M ALU		20 - 26	0.2	151280
SLEEV-IT FC MAR20M ALU		24 - 30	0.16	151281
SLEEV-IT FC MAR25M ALU		29 - 35	0.17	151282
SLEEV-IT FC MAR32M ALU		36 - 42	0.2	151283
SLEEV-IT FC MAR40M ALU		44 - 50	0.22	151284
SLEEV-IT FC MAR50M ALU (1.5")		52 - 58	0.3	151285
SLEEV-IT FC MAR60M ALU (2")		64 - 70	0.3	151286
SLEEV-IT FC MAR63M ALU		67 - 73	0.4	151287
SLEEV-IT FC MAR66M ALU		68 - 76	0.4	153747
SLEEV-IT FC MAR75M ALU		79 - 85	0.4	151288
SLEEV-IT FC MAR82M ALU		86 - 92	0.5	153748
SLEEV-IT FC MAR90M ALU (3")		93 - 99	0.5	151289
SLEEV-IT FC MAR110M ALU		112 - 120	0.7	151290
SLEEV-IT FC MAR115M ALU (4")		118 - 124	0.7	151291
SLEEV-IT FC MAR125M ALU		129 - 135	0.8	151292
SLEEV-IT FC MAR140M ALU		144 - 150	1	151293
SLEEV-IT FC MAR160M ALU		164 - 170	1	151294
SLEEV-IT FC MAR169M ALU (6")		172 - 178	1.1	151295
SLEEV-IT FC MAR200M ALU		204 - 210	1.5	151296
SLEEV-IT FC MAR219M ALU (8")		223 - 229	1.6	151297
SLEEV-IT FC MAR225M ALU		229 - 235	1.7	151298

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-11