




# Roxtec G EMC 穿隔系统

EMC 穿隔系统通过焊接安装。

Roxtec G EMC 是一种确保电磁兼容性的电缆和管道密封系统。它带有用于焊接安装的钢制框架。有提供电磁屏蔽的 Roxtec ES 模块与防止传导干扰的 PE 模块可供选择。这些模块适配不同规格的电缆。其穿隔系统可与镀锌钢 GE 扩展型框架配合使用于适配较厚墙体的厚度。Roxtec EC 电气连续性检测条可用于帮助指示穿隔装置的电气性能。

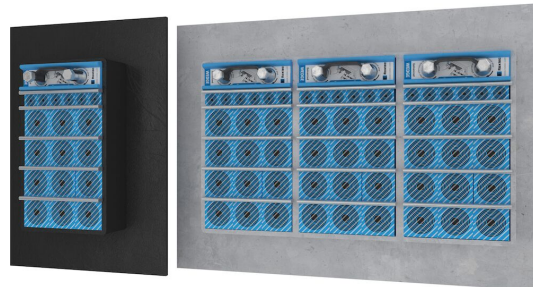

- 具有内置备用容量

## 产品特性



耐火



水密



气密



EMI 保护

## 安装结构



箱体和机柜



金属

## 安装类型



焊接

## 等级和证书

### 火灾

- A 级符合 IMO 2010 FTP 规范
- E/EI 等级符合 EN 13501

### 密封性

- 气体: 2.5 bar 洪灾
- 水: 4 bar 洪灾

### 支持

- 电磁屏蔽
- 电位均衡

## 框架尺寸

mm/kg


下方的不同框架只是部分选择。要了解全部的框架和配置请访问 [roxtec.com](https://www.roxtec.com)。

标题	框架开口	密封空间	外部尺寸 W x H x D	开孔尺寸 w x h	重量	产品编号
G 6x1 PRIMED	1	120 x 180	252.5 x 350 x 60	188(+15/-15) x 290(+15/-15)	4.4	G006000000112
G 6x2 PRIMED	2	120 x 180	383 x 350 x 60	318(+15/-15) x 290(+15/-15)	7.4	G006000000212
G 6x3 PRIMED	3	120 x 180	513.5 x 350 x 60	449(+15/-15) x 290(+15/-15)	9.8	G006000000312
G 6x1 AISI316	1	120 x 180	252.5 x 350 x 60	188(+15/-15) x 290(+15/-15)	4.8	G006000000121
G 6x2 AISI316	2	120 x 180	383 x 350 x 60	318(+15/-15) x 290(+15/-15)	7.3	G006000000221
G 6x3 AISI316	3	120 x 180	513.5 x 350 x 60	449(+15/-15) x 290(+15/-15)	9.8	G006000000321



# 密封组件数据

## 密封组件




Multidiameter™ 多径ソ  
RM ES 模块




润滑脂



楔形压紧件和楔形压紧套件  
ES 型



RM ES 盲堵模块




Multidiameter™ 多径ソ  
RM PE 模块



配件 ES 和 BG



支架工具



RM PE 盲堵模块



楔形压紧件和楔形压紧套件



隔层板



ES 密封套件



焊接工具

如需了解详细信息请访问 [roxtec.com](https://www.roxtec.com)。

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use. Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended. Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>. We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-25