



# 配有 SLF R 的 Roxtec R EMC 穿隔系统

用于密封受限区域内的多根电缆和管道时进行栓接安装的圆形 EMC 穿隔系统。

配有 SLF R 套筒的 Roxtec R EMC 是一种确保电磁兼容性的电缆和管道穿隔系统。其穿隔系统框架设计为可以安装在 SLF R 套筒内。其压紧件集成在框架中通过膨胀密封。有提供电磁屏蔽的 Roxtec ES 模块与防止传导干扰的 PE 模块可供选择。这些模块适配各种规格的电缆和管道并可用于在穿隔系统内提供备用容量。套筒与导电垫片和保护垫片一起栓接到结构上。使用 Roxtec EC 检测条来测试 Roxtec BG™ 或 ES 电缆穿隔系统安装的电气性能。

- 节省空间
- 易于维护和检查

## 产品特性



耐火



水密



气密



EMI 保护

## 安装结构




金属

## 安装类型



栓接

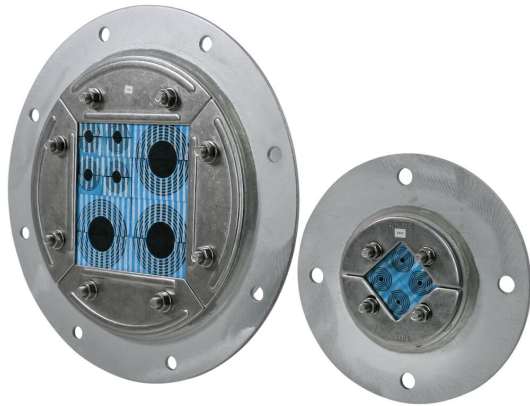

## 等级和证书

### 火灾

- A 级符合 IMO 2010 FTP 规范
- E/EI 等级符合 EN 13501
- F/T 等级符合 UL 1479
- H 级符合 IMO 2010 FTP 规范 + HC 火灾荷载曲线

### 密封性

- 气体: 2.5 bar 洪水测试
- 水: 4 bar 洪水测试

### 支持

- 电磁屏蔽
- 电位均衡

## 框架尺寸

mm/kg

下方的不同框架只是部分选择。要了解全部的框架和配置请访问 [roxtec.com](https://www.roxtec.com)。

标题	密封空间	开孔尺寸 Ø	重量	产品编号
R 75 EMC AISI316	40 x 40	75 - 77	0.5	ER00A00751121
R 100 EMC AISI316	60 x 60	100 - 102	0.8	ER00A01001121
R 125 EMC AISI316	80 x 80	125 - 127	1	5ER0000004913
R 127 EMC AISI316	80 x 80	127 - 129	1	ER00A01271121
R 150 EMC AISI316	90 x 90	150 - 152	1.7	ER00A01501121
R 70 EMC AISI316	40 x 40	70 - 72	0.46	ER00A00701121
R 200 EMC AISI316	120 x 120	200 - 202	2.7	ER00A02001121



## 密封组件数据


### 密封组件




SLF R 套筒




润滑脂




Multidiameter™ 多径 RM ES 模块




RM ES 盲堵模块




Multidiameter™ 多径 RM PE 模块



配件 ES 和 BG



RM PE 盲堵模块



R ES 密封套件

如需了解详细信息请访问 [roxtec.com](https://www.roxtec.com)。

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-09