




SL TB zıvanalı Roxtec TB yalıtım malzemesi

Çelik tank sınır yapılarında tek bir kablo veya boru için dairesel geçiş yalıtım malzemesi.

SL TB'li Roxtec TB (tank sınırı), tek bir kablo veya boru için çelik zıvanalı dairesel bir yalıtım malzemesidir. Giriş yalıtım malzemesi soyulabilir kauçuk katmanlı iki yarıdan oluşur ve bu sayede farklı ölçülerdeki kablolar ve borulara uyarlanabilir. Ön bağlantı parçaları zıvanada mekanik sabitlemeyi sağlar. SL TB zıvana yapıya kaynaklanır.

- Hızlı ve kolay montaj
- Farklı ölçülerde kablo ve borulara uyarlanır

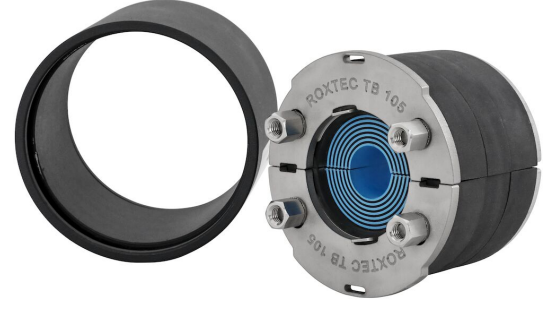

Ürün özellikleri



Yangın sınıflamalı



Su geçirmez



Gaz geçirmez

Montaj yapılacak yapı



Metal

Montaj tipi



Kaynak

Derecelendirmeler ve sertifikalar

Yangın

- IMO 2010 FTP Koduna göre A-SINIFI

Sızdırmazlık

- Gaz: 2 Bar (katastrofik) / 1,2 bar (tank sınırları)
- Su: 11 bar (katastrofik) / 6,6 bar (tank sınırları)

Yalıtım elemanı verileri

Yalıtım elemanları



Kayganlaştırıcı




TB set

Ayrıntılı bilgi için lütfen [roxtec.com](https://www.roxtec.com) adresini ziyaret edin.



Önceden yapılandırılmış geçiş kitleri

mm/kg

TB 65 KIT AISI316
WOC/PRIMEDTB 65 KIT AISI316
WOC/AISI316TB 105 KIT AISI316
WOC/PRIMEDTB 105 KIT AISI316
WOC/AISI316

Başlık	Konfigürasyon	Açıklık boyutları Ø	Ağırlık	Madde Numarası
TB 65 KIT AISI316 WOC/PRIMED	1x (8.0-30.0)	80 - 82	1.6	184905
TB 65 KIT AISI316 WOC/AISI316	1x (8.0-30.0)	80 - 82	1.6	196482
TB 105 KIT AISI316 WOC/PRIMED	1x (24.0-54.0)	120 - 122	2.8	200102
TB 105 KIT AISI316 WOC/AISI316	1x (24.0-54.0)	120 - 122	2.9	200103

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-05-03