





GK 防火密封套件

高效利用空间的电缆、电缆束或母线穿隔系统。

GK 防火密封套件适用于船舶水线以上应用中的套管。 它将冷烟密性与防火相结合チ其集成的膨胀材料能够在发生火灾或温度上升到 150°C 以上时通过膨胀堵住空隙。 此套件可以安装在各种圆形或椭圆形套管内チ对于 A-60 或 A-0 应用不需要任何其他绝缘。



● 节省空间

② 安装快速便捷





耐火

安装结构



金属

安装类型



栓接





现有套筒

等级和证书

火灾



● A 级符合 IMO 2010 FTP 规范

密封组件数据

密封组件



GK FS SK

如需了解详细信息チ请访问 roxtec.com。

1/3





197822

1.5

预装配的穿隔套件


mm/kg

GK FS SK 273 KIT

NON-OPENABLE

GK FS SK 250x170 KIT NON-OPENABLE

NON-OPENABLE

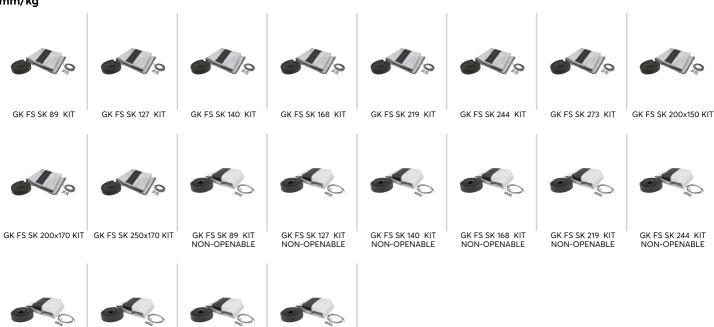

GK FS SK 200x150 KIT GK FS SK 200x170 KIT GK FS SK 250x170 KIT

NON-OPENABLE

标题	配置	开孔尺寸 Ø	重量	产品编号
GK FS SK 89 KIT		84 - 89	0.7	197464
GK FS SK 127 KIT		107 - 127	1	197465
GK FS SK 140 KIT		120 - 140	0.8	197466
GK FS SK 168 KIT		138 - 168	1.2	197467
GK FS SK 219 KIT		179 - 219	1.6	197468
GK FS SK 244 KIT		204 - 244	1.8	197469
GK FS SK 273 KIT		233 - 273	1.9	197470
GK FS SK 200x150 KIT		169 - 182	1.3	197472
GK FS SK 200x170 KIT		176 - 189	1.4	197474
GK FS SK 250x170 KIT		208 - 224	1.6	197475
GK FS SK 89 KIT NON-OPENABLE		84 - 89	0.6	197823
GK FS SK 127 KIT NON-OPENABLE		107 - 127	0.7	197817
GK FS SK 140 KIT NON-OPENABLE		120 - 140	0.7	197820
GK FS SK 168 KIT NON-OPENABLE		138 - 168	1.1	197821
GK FS SK 219 KIT NON-OPENABLE		179 - 219	1.4	197824
GK FS SK 244 KIT NON-OPENABLE		204 - 244	1.6	197825
GK FS SK 273 KIT NON-OPENABLE		233 - 273	2.3	197814
GK FS SK 200x150 KIT NON-OPENABLE		169 - 182	1.2	197813
GK FS SK 200x170 KIT NON-OPENABLE		176 - 189	1.3	197818

NON-OPENABLE

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for

208 - 224

In a product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties for merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from https://www.roxtec.com/en/about-rus/about-roxtec/general-terms-of-sales/

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-07-02



https://www.roxtec.com/linktransit/zh-cn/solution/8843





Roxtec

3/3