




Roxtec SFOH 貫通部

既設配線に使える分割可能な貫通部。構造面ボルト固定用の穴が仕込まれたフランジ付き。

Roxtec SFOH は、分割可能なケーブル・パイプ貫通部シールです。既設の配線や配管周りに取り付けできる製品です。角型の鋼製フレームには、あらかじめボルト穴が仕込まれたフランジが付いています。火気作業が適さない場合に最適な貫通部製品です。

- 改修に最適
- 開閉可能

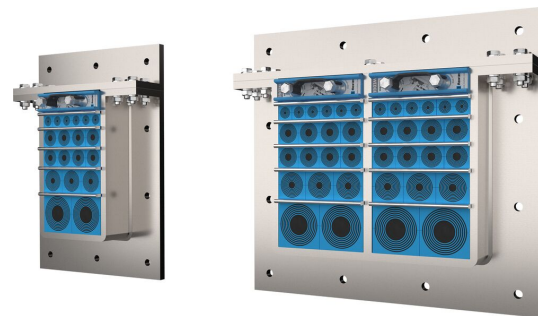

製品特性



耐火



防水



気密



IP/UL NEMA

設置構造



金属

取り付けタイプ



ボルト締め

規格と認証証明書

火災

- A 級 IMO 2010 FTP コードに基づく試験

密性

- ガス: 0.1 バール (衝撃圧)
- 水: 1 バール (衝撃圧)
- IEC 60529 規格 IP 66/67

フレーム寸法

mm/kg

以下のフレームは一部です。フレームと構成品の全ラインナップについては、[roxtec.com](https://www.roxtec.com) をご覧ください。


タイトル	フレームの開口部	パッキンスペース	外径 WxHxD	開口部寸法 w x h	重量	部品番号
SFOH 2x1 AISI316	1	120 x 60	260.5 x 241 x 60	161(+5/-5) x 141(+5/-5)	7	106162
SFOH 6x2 AISI316	2	120 x 180	393 x 358 x 60	293(+5/-5) x 258(+5/-5)	13	118846
SFOH 6x3 AISI316	3	120 x 180	525.5 x 358 x 60	426(+5/-5) x 258(+5/-5)	18	118847
SFOH 6x4 AISI316	4	120 x 180	658 x 358 x 60	558(+5/-5) x 258(+5/-5)	20.4	105325
SFOH 8x1 AISI316	1	120 x 240	260.5 x 418 x 60	161(+5/-5) x 318(+5/-5)	16	106165
SFOH 8x2 AISI316	2	120 x 240	393 x 418 x 60	293(+5/-5) x 318(+5/-5)	13.5	106221
SFOH 8x3 AISI316	3	120 x 240	525.5 x 418 x 60	426(+5/-5) x 318(+5/-5)	18.8	171369
SFOH 8x4 AISI316	4	120 x 240	658 x 418 x 60	558(+5/-5) x 318(+5/-5)	22.5	171370
SFOH 2x1 GALV	1	120 x 60	260.5 x 241 x 60	161(+5/-5) x 141(+5/-5)	7	124472
SFOH 2x2 GALV	2	120 x 60	393 x 241 x 60	293(+5/-5) x 141(+5/-5)	10	251640
SFOH 2x3 GALV	3	120 x 60	525.5 x 241 x 60	426(+5/-5) x 141(+5/-5)	13.1	251641
SFOH 2x2 AISI316	2	120 x 60	393 x 241 x 60	293(+5/-5) x 141(+5/-5)	10.2	245788
SFOH 2x4 GALV	4	120 x 60	658 x 241 x 60	558(+5/-5) x 141(+5/-5)	16.2	251642
SFOH 4x1 GALV	1	120 x 120	260.5 x 299.5 x 60	161(+5/-5) x 200(+5/-5)	8.5	124473
SFOH 4x2 GALV	2	120 x 120	393 x 299.5 x 60	293(+5/-5) x 200(+5/-5)	11.5	251643
SFOH 4x3 GALV	3	120 x 120	525.5 x 299.5 x 60	426(+5/-5) x 200(+5/-5)	14.9	251644
SFOH 4x4 GALV	4	120 x 120	658 x 299.5 x 60	558(+5/-5) x 200(+5/-5)	19	123016
SFOH 6x1 GALV	1	120 x 180	260.5 x 358 x 60	161(+5/-5) x 258(+5/-5)	10	175023
SFOH 6x2 GALV	2	120 x 180	393 x 358 x 60	293(+5/-5) x 258(+5/-5)	13.5	175025
SFOH 6x3 GALV	3	120 x 180	525.5 x 358 x 60	426(+5/-5) x 258(+5/-5)	16.6	124470



タイトル	フレームの開口部	パッキンスペース	外径 WxHxD	開口部寸法 w x h	重量	部品番号
SFOH 6x4 GALV	4	120 x 180	658 x 358 x 60	558(+5/-5) x 258(+5/-5)	20.4	124471
SFOH 8x1 GALV	1	120 x 240	260.5 x 418 x 60	161(+5/-5) x 318(+5/-5)	10	175034
SFOH 2x3 AISI316	3	120 x 60	525.5 x 241 x 60	426(+5/-5) x 141(+5/-5)	13.4	245789
SFOH 8x2 GALV	2	120 x 240	393 x 418 x 60	293(+5/-5) x 318(+5/-5)	14.4	254323
SFOH 8x3 GALV	3	120 x 240	525.5 x 418 x 60	426(+5/-5) x 318(+5/-5)	18.4	254324
SFOH 8x4 GALV	4	120 x 240	658 x 418 x 60	558(+5/-5) x 318(+5/-5)	22.5	254325
SFOH 2x4 AISI316	4	120 x 60	658 x 241 x 60	558(+5/-5) x 141(+5/-5)	16.5	245790
SFOH 4x1 AISI316	1	120 x 120	260.5 x 299.5 x 60	161(+5/-5) x 200(+5/-5)	8	106163
SFOH 4x2 AISI316	2	120 x 120	393 x 299.5 x 60	293(+5/-5) x 200(+5/-5)	11.7	171353
SFOH 4x3 AISI316	3	120 x 120	525.5 x 299.5 x 60	426(+5/-5) x 200(+5/-5)	14.8	171354
SFOH 4x4 AISI316	4	120 x 120	658 x 299.5 x 60	558(+5/-5) x 200(+5/-5)	18.6	236043
SFOH 6x1 AISI316	1	120 x 180	260.5 x 358 x 60	161(+5/-5) x 258(+5/-5)	9	106164

シーリングコンポーネントのデータ


シーリングコンポーネント



ステイプレート




シーリングキット



RM ソリッドコン
プレッション モジュ



ウェッジ & ウェッ



Multidiameter™ 付き RM



ホルダー・ツール



プリ・コンプレッショ



潤滑剤

付属品

詳細情報については、[roxtec.com](https://www.roxtec.com) をご覧ください。

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-01-13



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.