


Roxtec GH BG™ transit

Transit with flange and earthing terminal, for bolting onto even structures.

The Roxtec GH BG™ is a cable and pipe seal for bonding and grounding applications. The rectangular steel frame is bolted onto steel or sandwich walls/floors and allows for high cable and pipe packing density. The transit can be used with a GE extension frame in galvanized steel to cover the depth of a thick wall. Roxtec EC (electrical continuity) test sticks are available to help indicate the electrical performance of the transit installation.

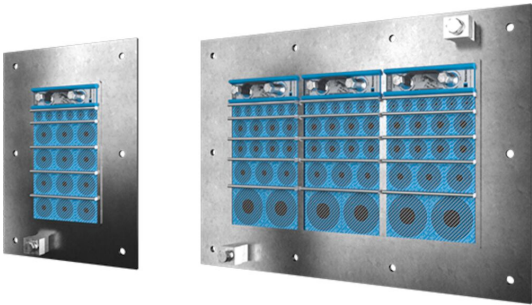

- Rodent resistant
- Easy to maintain and inspect

Product characteristics



Fire rated



IP/UL NEMA



Electrical safety

Structure of installation



Cabinets & enclosures



Metal

Mounting type



Bolting

Ratings & certificates

Fire

- E/EI rating according to EN 13501
- F/T rating according to UL 1479

Tightness

- IP 66/67


Supports

- Bonding and grounding

Frame dimensions

mm/kg


The frame variants below are a limited selection. For the full range of frames and configurations, please visit [roxtec.com](https://www.roxtec.com).

|  | Product | Frame openings | Packing space | External dimensions W x H x D | Aperture dimensions w x h | Weight | Art. no |
|--|-------------------|----------------|---------------|----------------------------------|------------------------------|--------|---------|
| | GH BG 6x1 GALV | 1 | 120 x 180 | 252.5 x 350 x 93 | 148(+5/-5) x 245(+5/-5) | 4.4 | 109604 |
| | GH BG 6x2 GALV | 2 | 120 x 180 | 383 x 350 x 93 | 278(+5/-5) x 245(+5/-5) | 7.5 | 110003 |
| | GH BG 6x3 GALV | 3 | 120 x 180 | 513.5 x 350 x 93 | 409(+5/-5) x 245(+5/-5) | 10.4 | 110015 |
| | GH BG 6x1 AISI316 | 1 | 120 x 180 | 252.5 x 350 x 93 | 148(+5/-5) x 245(+5/-5) | 4.9 | 122511 |
| | GH BG 6x2 AISI316 | 2 | 120 x 180 | 383 x 350 x 93 | 278(+5/-5) x 245(+5/-5) | 6.7 | 122512 |
| | GH BG 6x3 AISI316 | 3 | 120 x 180 | 513.5 x 350 x 93 | 409(+5/-5) x 245(+5/-5) | 9.9 | 110477 |
| | | | | | | | |



Sealing components


Sealing components



RM BG™ module with Multidiameter™



Lubricant



RM BG™ solid compensation module



Wedge & Wedgekit



Stayplate



GE extension frame



Accessories ES and BG



BG™ sealing kit



Holder tools

For detailed information, please visit [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-05-01