




Roxtec GH BG™ FL100 트랜짓

균일하지 않은 구조물에 연결할 수 있는 광폭 플랜지와 접지 볼트를 갖춘

Roxtec GH BG™ FL100은 본딩 및 접지를 위한 케이블 및 파이프 씰입니다. 넓은 플랜지가 부착된 직사각형의 철강 프레임을 사용하여 콘크리트 또는 벽돌 벽/바닥에 볼트로 체결할 때 단단히 씰링할 수 있습니다. 이 씰은 고밀도 케이블 및 파이프 설치가 가능합니다. 이 트랜짓은 아연 도금된 철강 재질의 GE 확장 프레임과 함께 사용하여 두꺼운 벽도 관통할 수 있습니다. Roxtec EC 테스트 스틱을 사용하여 Roxtec BG™ 또는 ES 케이블 트랜짓의 전기 성능을 표시하는 데 사용됩니다.

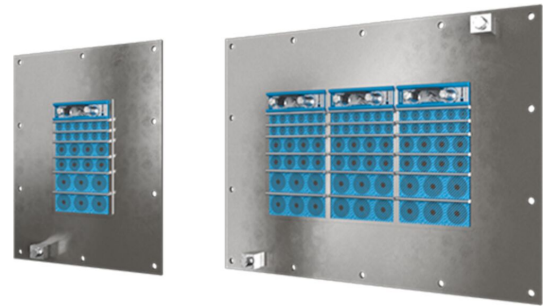

- 유지 및 검사 용이
- 예비 공간 포함 제공

제품 특징점



내화



IP/UL NEMA



전기관련

설치 구조



콘크리트



벽돌

장착 유형



볼트체결

등급 및 인증

화재

- EN 13501에 따른 E/EI 등급
- UL 1479에 따른 F/T 등급

강도

- IP 66/67

지원

- Bonding과 Grounding

프레임 치수

mm/kg


아래의 프레임 변화는 제한된 선택입니다. 프레임 및 구성의 전체 범위를 보려면 [roxtec.com](https://www.roxtec.com)을 방문하십시오.

구성	프레임 입구	모듈설치공간	외부 치수 WxHxD	홀 치수 w x h	무게	Art. 번호
GH BG 6x1 FL100 GALV	1	120 x 180	332.5 x 430 x 93	148(+5/-5) x 245(+5/-5)	8	122388
GH BG 6x2 FL100 GALV	2	120 x 180	463 x 430 x 93	278(+5/-5) x 245(+5/-5)	9.3	122389
GH BG 6x3 FL100 GALV	3	120 x 180	593.5 x 430 x 93	409(+5/-5) x 245(+5/-5)	12.6	122390
GH BG 6x1 FL100 AISI316	1	120 x 180	332.5 x 430 x 93	148(+5/-5) x 245(+5/-5)	8	122264
GH BG 6x2 FL100 AISI316	2	120 x 180	463 x 430 x 93	278(+5/-5) x 245(+5/-5)	9.4	122265
GH BG 6x3 FL100 AISI316	3	120 x 180	593.5 x 430 x 93	409(+5/-5) x 245(+5/-5)	12.8	122266



씰링 컴포넌트 데이터


씰링 컴포넌트



RM BG™ 모듈(Multidiame)



윤활제



RM BG™ 솔리드



Wedge 및 We



스테이플레이트

액세서리



GE 확장 프레임



액세서리 ES 및



BG™ 씰링 키트



홀더 도구

자세한 내용은 [roxtec.com](https://www.roxtec.com)을 방문하십시오.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use. Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended. Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/> We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-23