




Roxtec Sleeve-it™ Waterproof penetration seal

Penetration seal for plastic pipes for basic protection against fire, gas and water.

The Roxtec Sleeve-it™ Waterproof penetration seal is a light-weight solution. Its stainless steel casing contains intumescent material to block the penetration in case of fire and its rubber grommet is engineered for a range of pipe sizes. It is installed from one side and is available for both steel and aluminum structures.

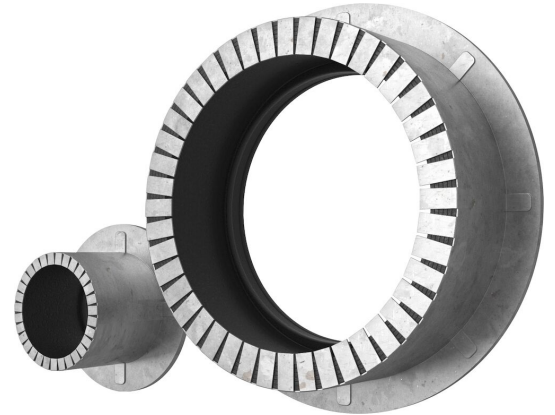

- Light-weight
- Area efficient
- Quick and easy to install

Product characteristics



Fire rated



Watertight

Structure of installation



Metal

Mounting type



Welding

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code
- B-CLASS according to IMO 2010 FTP Code

Tightness

- Water: 1 bar (catastrophic)

Sealing components

Sealing components




Sleeve-it™ Waterproof penetration seal

For detailed information, please visit [roxtec.com](https://www.roxtec.com).



Pre-configured transit kits

mm/kg

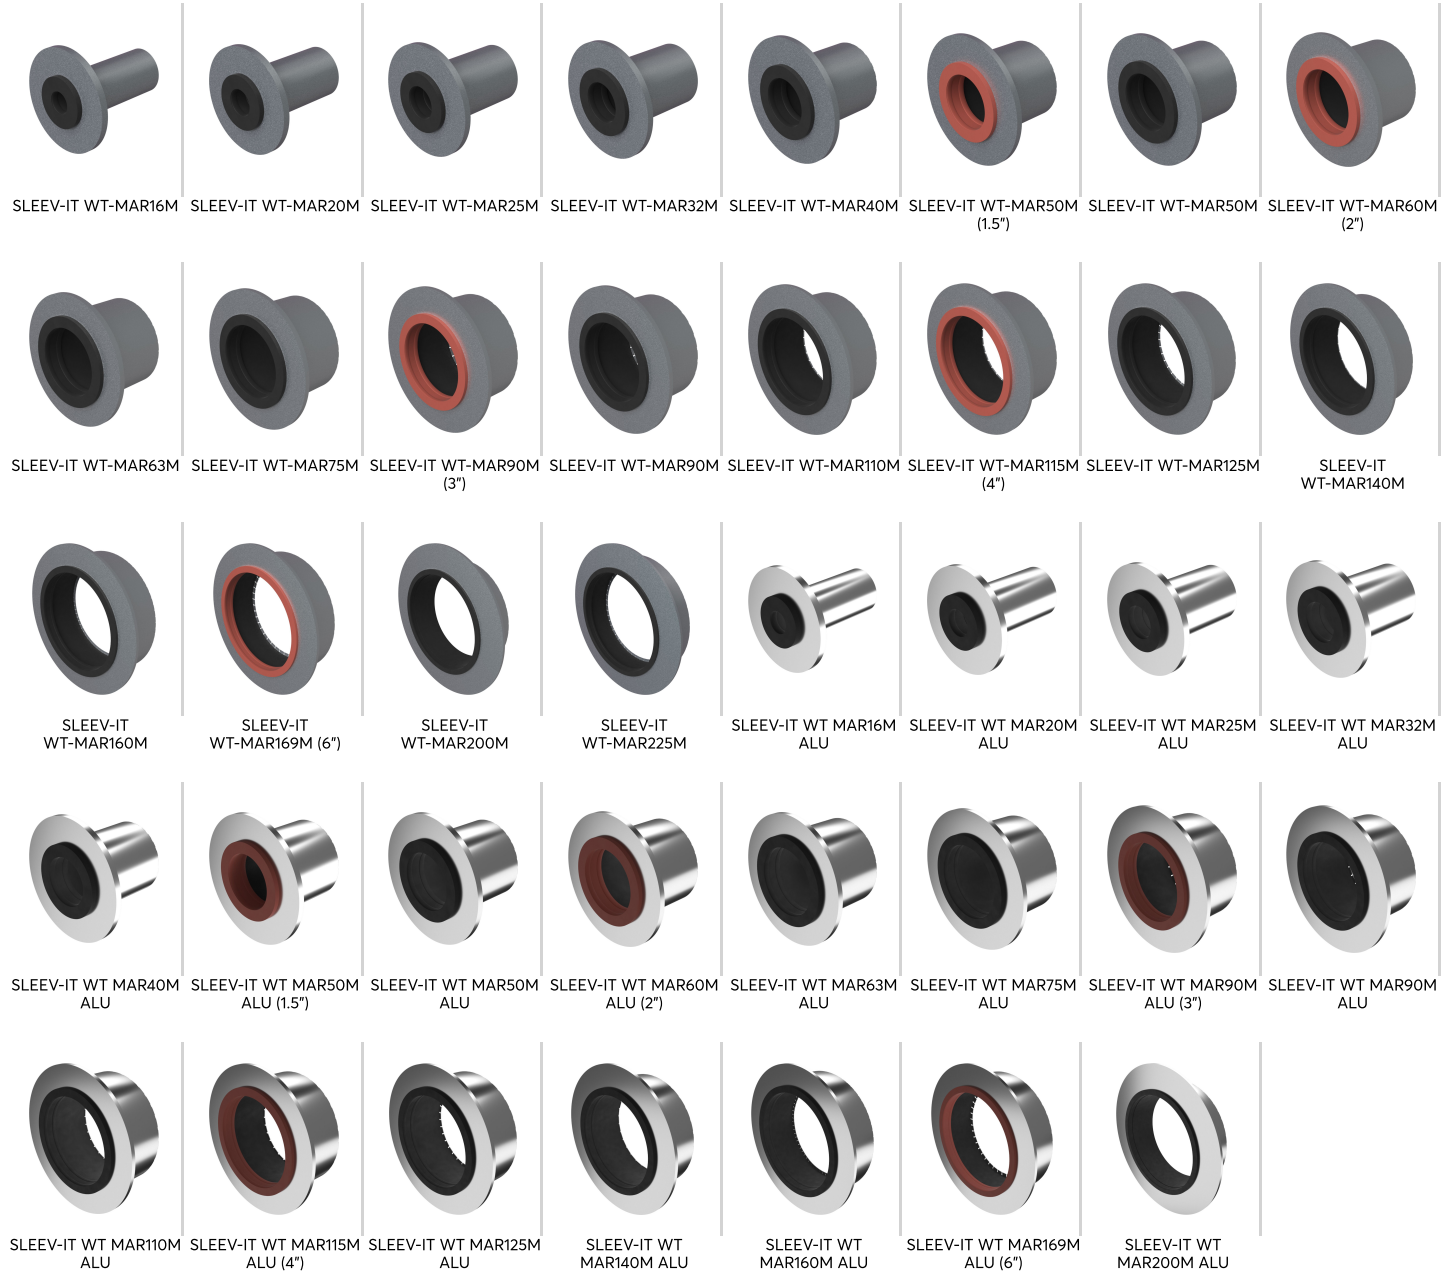



| Product | Configuration | Aperture dimensions Ø | Weight | Art. no |
|-------------------------------|---------------|--------------------------|--------|---------|
| SLEEV-IT WT-MAR16M | | 36 - 46 | 0.25 | 106315 |
| SLEEV-IT WT-MAR20M | | 44 - 54 | 0.32 | 106316 |
| SLEEV-IT WT-MAR25M | | 46 - 56 | 0.34 | 106319 |
| SLEEV-IT WT-MAR32M | | 53 - 63 | 0.38 | 106322 |
| SLEEV-IT WT-MAR40M | | 64 - 74 | 0.41 | 106325 |
| SLEEV-IT WT-MAR50M (1.5") | | 74 - 84 | 0.48 | 106359 |
| SLEEV-IT WT-MAR50M | | 74 - 84 | 0.5 | 106328 |
| SLEEV-IT WT-MAR60M (2") | | 85 - 95 | 0.5 | 106362 |
| SLEEV-IT WT-MAR63M | | 88 - 98 | 0.5 | 106331 |
| SLEEV-IT WT-MAR75M | | 107 - 117 | 0.8 | 106334 |
| SLEEV-IT WT-MAR90M (3") | | 129 - 139 | 1 | 106365 |
| SLEEV-IT WT-MAR90M | | 127 - 137 | 1 | 106337 |
| SLEEV-IT WT-MAR110M | | 148 - 158 | 1.2 | 106341 |
| SLEEV-IT WT-MAR115M (4") | | 147 - 157 | 1.2 | 106371 |
| SLEEV-IT WT-MAR125M | | 167 - 177 | 1.4 | 106344 |
| SLEEV-IT WT-MAR140M | | 175 - 185 | 1.6 | 106347 |
| SLEEV-IT WT-MAR160M | | 210 - 220 | 1.8 | 106350 |
| SLEEV-IT WT-MAR169M (6") | | 220 - 230 | 2 | 106373 |
| SLEEV-IT WT-MAR200M | | 245 - 255 | 3 | 106353 |
| SLEEV-IT WT-MAR225M | | 285 - 295 | 3.8 | 106356 |
| SLEEV-IT WT MAR16M ALU | | 47 - 53 | 0.15 | 151259 |
| SLEEV-IT WT MAR20M ALU | | 53 - 59 | 0.18 | 151260 |
| SLEEV-IT WT MAR25M ALU | | 59 - 65 | 0.2 | 151261 |
| SLEEV-IT WT MAR32M ALU | | 66 - 72 | 0.3 | 151262 |
| SLEEV-IT WT MAR40M ALU | | 73 - 79 | 0.3 | 151263 |
| SLEEV-IT WT MAR50M ALU (1.5") | | 81 - 87 | 0.3 | 151264 |
| SLEEV-IT WT MAR50M ALU | | 83 - 89 | 0.3 | 151265 |
| SLEEV-IT WT MAR60M ALU (2") | | 97 - 103 | 0.4 | 151266 |
| SLEEV-IT WT MAR63M ALU | | 100 - 106 | 0.4 | 151267 |
| SLEEV-IT WT MAR75M ALU | | 117 - 123 | 0.5 | 151268 |
| SLEEV-IT WT MAR90M ALU (3") | | 131 - 137 | 0.7 | 151269 |
| SLEEV-IT WT MAR90M ALU | | 132 - 138 | 0.7 | 151270 |
| SLEEV-IT WT MAR110M ALU | | 157 - 163 | 0.8 | 151271 |
| SLEEV-IT WT MAR115M ALU (4") | | 163 - 169 | 0.9 | 151272 |
| SLEEV-IT WT MAR125M ALU | | 172 - 178 | 1 | 151273 |
| SLEEV-IT WT MAR140M ALU | | 192 - 198 | 1.1 | 151274 |
| SLEEV-IT WT MAR160M ALU | | 212 - 218 | 1.1 | 151275 |
| SLEEV-IT WT MAR169M ALU (6") | | 221 - 227 | 1.4 | 151276 |
| SLEEV-IT WT MAR200M ALU | | 262 - 268 | 1.8 | 151277 |

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use. Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended. Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/> We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-15