



Roxtec Sleeve-it™ 防水穿隔密封系统

这种用于塑料管道的穿隔密封系统可提供基本的防护于防止气体和水侵害。

Roxtec Sleeve-it™ 防水穿隔密封系统用于塑料管道于其不锈钢外壳包含膨胀性混合材料层于在感受到火灾的热量后发生反应于在管道开始软化后保护穿隔系统。其橡胶垫圈根据特定管道规格定做于设计用于在塑料管道周围保持水密性。其穿隔系统可焊接到甲板和舱壁于无需额外的套筒。

- 轻型
- 节省空间
- 安装快速便捷

产品特性



耐火



水密

安装结构




金属

安装类型



焊接

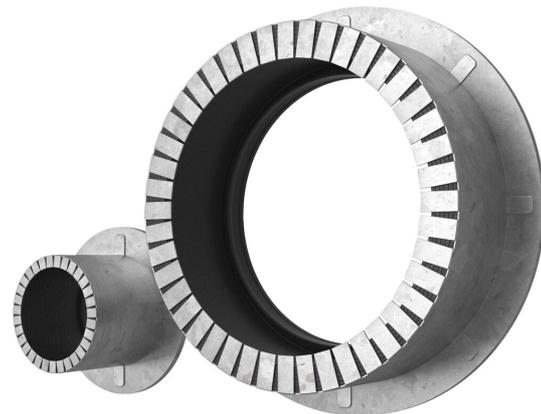

等级和证书

火灾

- A 级符合 IMO 2010 FTP 规范
- B 级符合 IMO 2010 FTP 规范

密封性

- 水: 1 bar 洪水

密封组件数据

密封组件




Sleeve-it™ 防水穿隔密封系统

如需了解详细信息于请访问 [roxtec.com](https://www.roxtec.com)。



预装配的穿隔套件

mm/kg

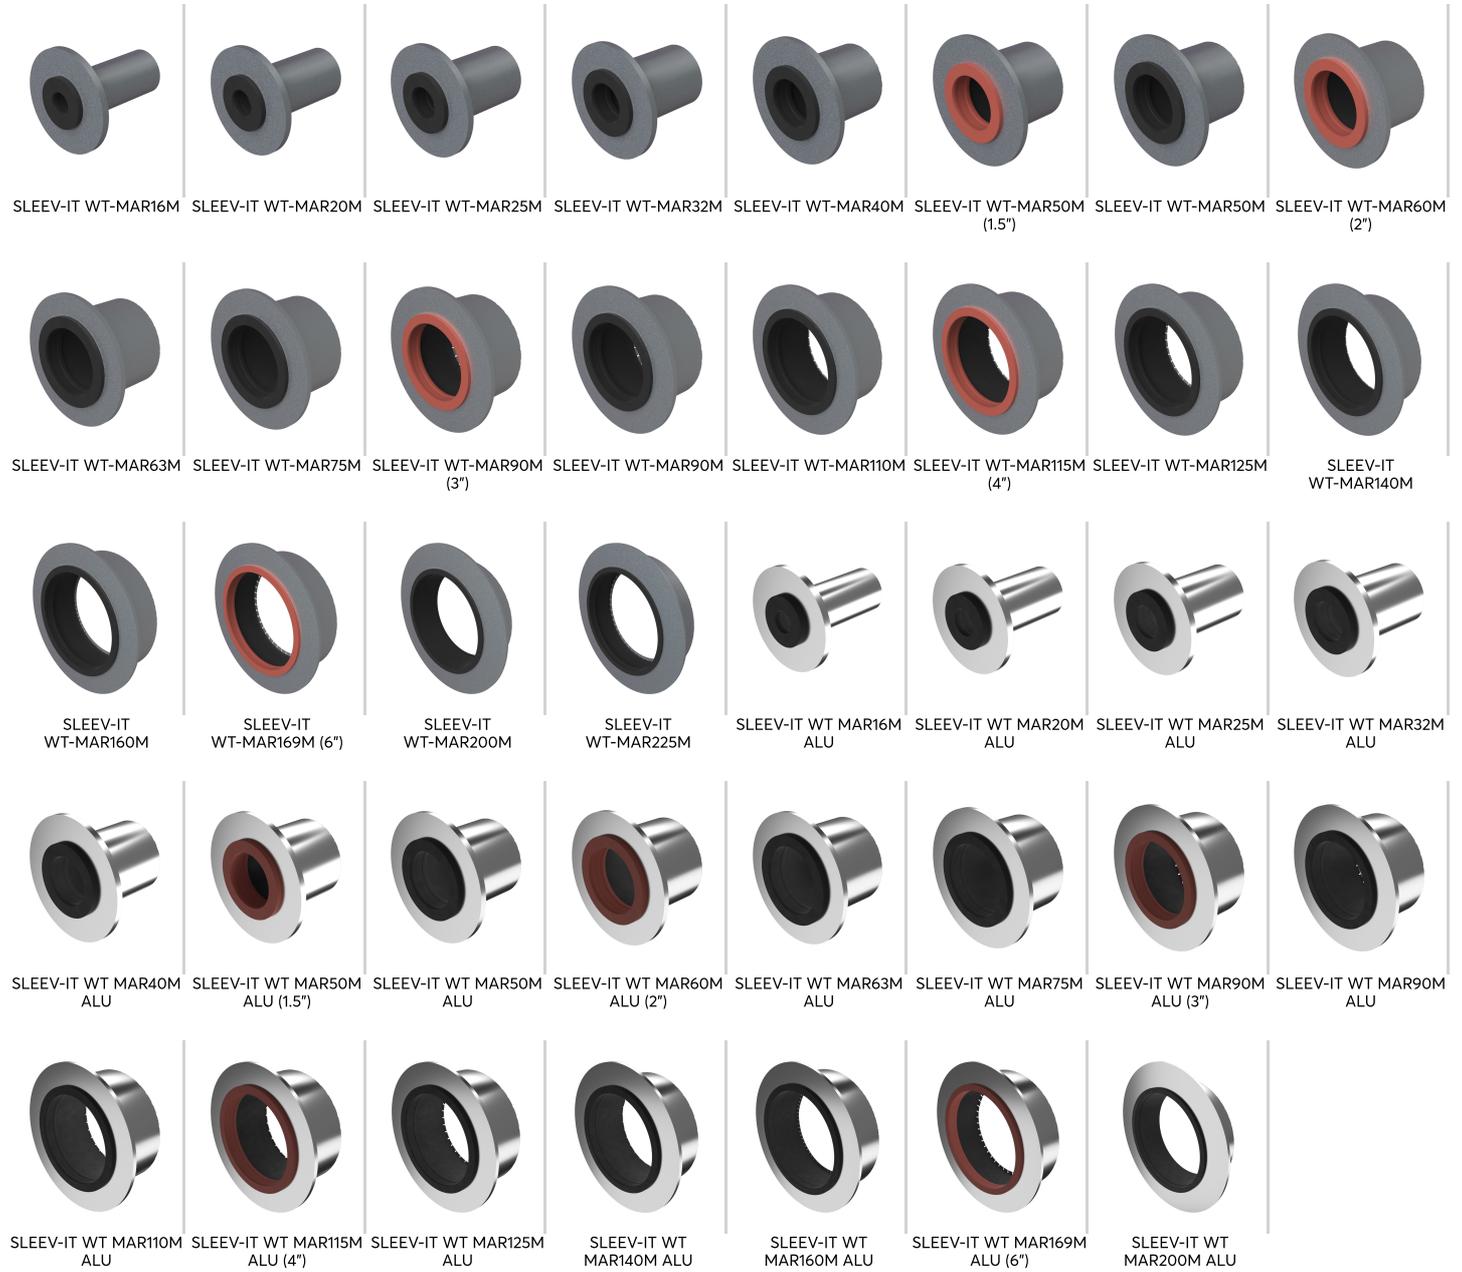



标题	配置	开孔尺寸 Ø	重量	产品编号
SLEEV-IT WT-MAR16M		36 - 46	0.25	106315
SLEEV-IT WT-MAR20M		44 - 54	0.32	106316
SLEEV-IT WT-MAR25M		46 - 56	0.34	106319
SLEEV-IT WT-MAR32M		53 - 63	0.38	106322
SLEEV-IT WT-MAR40M		64 - 74	0.41	106325
SLEEV-IT WT-MAR50M (1.5")		74 - 84	0.48	106359
SLEEV-IT WT-MAR50M		74 - 84	0.5	106328
SLEEV-IT WT-MAR60M (2")		85 - 95	0.5	106362
SLEEV-IT WT-MAR63M		88 - 98	0.5	106331
SLEEV-IT WT-MAR75M		107 - 117	0.8	106334
SLEEV-IT WT-MAR90M (3")		129 - 139	1	106365
SLEEV-IT WT-MAR90M		127 - 137	1	106337
SLEEV-IT WT-MAR110M		148 - 158	1.2	106341
SLEEV-IT WT-MAR115M (4")		147 - 157	1.2	106371
SLEEV-IT WT-MAR125M		167 - 177	1.4	106344
SLEEV-IT WT-MAR140M		175 - 185	1.6	106347
SLEEV-IT WT-MAR160M		210 - 220	1.8	106350
SLEEV-IT WT-MAR169M (6")		220 - 230	2	106373
SLEEV-IT WT-MAR200M		245 - 255	3	106353
SLEEV-IT WT-MAR225M		285 - 295	3.8	106356
SLEEV-IT WT MAR16M ALU		47 - 53	0.15	151259
SLEEV-IT WT MAR20M ALU		53 - 59	0.18	151260
SLEEV-IT WT MAR25M ALU		59 - 65	0.2	151261
SLEEV-IT WT MAR32M ALU		66 - 72	0.3	151262
SLEEV-IT WT MAR40M ALU		73 - 79	0.3	151263
SLEEV-IT WT MAR50M ALU (1.5")		81 - 87	0.3	151264
SLEEV-IT WT MAR50M ALU		83 - 89	0.3	151265
SLEEV-IT WT MAR60M ALU (2")		97 - 103	0.4	151266
SLEEV-IT WT MAR63M ALU		100 - 106	0.4	151267
SLEEV-IT WT MAR75M ALU		117 - 123	0.5	151268
SLEEV-IT WT MAR90M ALU (3")		131 - 137	0.7	151269
SLEEV-IT WT MAR90M ALU		132 - 138	0.7	151270
SLEEV-IT WT MAR110M ALU		157 - 163	0.8	151271
SLEEV-IT WT MAR115M ALU (4")		163 - 169	0.9	151272
SLEEV-IT WT MAR125M ALU		172 - 178	1	151273
SLEEV-IT WT MAR140M ALU		192 - 198	1.1	151274
SLEEV-IT WT MAR160M ALU		212 - 218	1.1	151275
SLEEV-IT WT MAR169M ALU (6")		221 - 227	1.4	151276
SLEEV-IT WT MAR200M ALU		262 - 268	1.8	151277

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use. Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended. Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/> We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-15