






# Passage Roxtec CF 8/32 Ex

Passage en aluminium, pour une forte densité de câbles, destiné aux coffrets.

Les Roxtec CF 8 Ex et CF 32 Ex sont des passages de câbles et de tuyauteries constitués de cadres en aluminium coulé. Les passages sont certifiés pour les zones classées Ex e et Ex tb à des températures comprises entre -40 et +80°C et peuvent être utilisés avec des câbles armés nécessitant la liaison et la mise à la terre. Les modules d'étanchéité s'adaptent à des câbles et des tuyauteries de différentes tailles.



-  Résistant aux rongeurs
-  Léger
-  Surface optimisée

## Caractéristiques du produit



IP/UL NEMA



Certifié ATEX



Sécurité électrique

## Structure d'installation





Armoires et coffrets

## Classements et certificats

### Étanchéité

-  IP 66/67, UL/NEMA 4,4X,12,13

### Supports

-  Liaison et mise à la terre
-  Certifié ATEX

## Dimensions du cadre


mm/kg

Les variantes de cadre ci-dessous sont une sélection limitée. Pour voir la gamme complète de cadres et de configurations, veuillez visiter [roxtec.com](https://www.roxtec.com).

Titre	Ouvertures de cadre	Espace de remplissage	Dimensions externes WxHxD	Dimensions d'ouverture w x h	Poids	N° art.
CF 32 Ex	2	40 x 160	130 x 230 x 60	110(+0.5/-0.5) x 216(+0.5/-0.5)	1.2	EXCSF0000320035
CF 8 Ex	1	40 x 80	75 x 140 x 60	61(+0.5/-0.5) x 127(+0.5/-0.5)	0.44	EXCSF0000080035

## Éléments d'étanchéité


### Éléments d'étanchéité



Module CM Ex avec Multidiameter™



Module de compensation plein CM Ex



Module CM BG™ Ex avec Multidiameter™




Lubrifiant Roxtec

Pour plus d'informations, veuillez consulter [roxtec.com](https://www.roxtec.com).



# Kits de passage préconfigurés

mm/kg

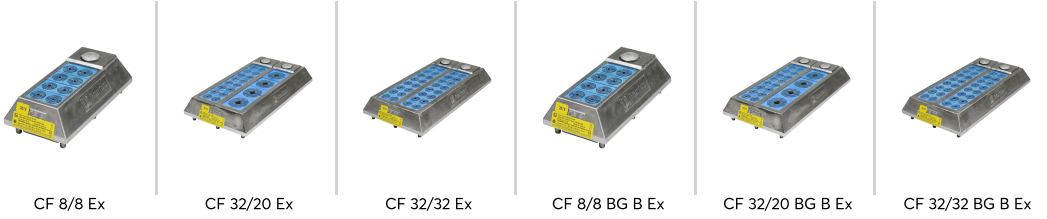

Titre	Configuration	Dimensions externes WxHxD	Dimensions d'ouverture w x h	Poids	N° art.
CF 8/8 Ex	8x (3.5-16.5)	75 x 140 x 59	61(+0.5/-0.5) x 127(+0.5/-0.5)	0.9	EXCKT80000008
CF 32/20 Ex	4x (9.5-32.5), 16x (3.5-16.5)	130 x 230 x 59	110(+0.5/-0.5) x 216(+0.5/-0.5)	2.2	EXCKT32000020
CF 32/32 Ex	32x (3.5-16.5)	130 x 230 x 59	110(+0.5/-0.5) x 216(+0.5/-0.5)	1.8	EXCKT32000032
CF 8/8 BG B Ex	8x (3.5-16.5)	75 x 140 x 59	61(+0.5/-0.5) x 127(+0.5/-0.5)	0.8	103591
CF 32/20 BG B Ex	4x (9.5-32.5), 16x (3.5-16.5)	130 x 230 x 59	110(+0.5/-0.5) x 216(+0.5/-0.5)	2.5	103736
CF 32/32 BG B Ex	32x (3.5-16.5)	130 x 230 x 59	110(+0.5/-0.5) x 216(+0.5/-0.5)	2.4	103737

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-20