



# Roxtec CSP geçişler

Yüksek kablo yoğunluğu uygulamaları için kabin yalıtım malzemesi.

Roxtec CSP 16/32, kabinler ve muhafazalar için çoklu kablo ve boru geçişleri cihazıdır. Çerçeve, AISI316 paslanmaz çelikten üretilmiştir ve 16 veya 32 kablo kapasitesine sahip boyut seçenekleriyle sunulmaktadır. Kullanılabilirliği ve montaj kolaylığını daha da artırmak için entegre bir sıkıştırma ünitesine sahiptir. Yalıtım modülleri farklı boyutlardaki kablolar ve borulara uyum sağlar ve IP veya UL/NEMA derecelendirmeleri için özel ihtiyaçlar doğrultusunda seçilebilir.



- Yüzeyi verimli kullanır
- Hızlı ve kolay montaj
- Sonlandırılmış kabloları izin verir

## Ürün özellikleri



IP/UL NEMA

## Montaj yapılacak yapı



Panolar ve muhafazalar



Metal

## Montaj tipi



Cıvatalama

## Derecelendirmeler ve sertifikalar

### Sızdırmazlık

- IEC 60529'a göre IP 66/67, UL/NEMA 4,4X,12,13

## Çerçeve boyutları

mm/kg

Aşağıdaki çerçeve çeşitleri sınırlı sayıda seçenekten oluşmaktadır. Çerçeve ve yapılandırma yelpazesinin tamamı için [roxtec.com](https://www.roxtec.com) adresini ziyaret edin.


| Başlık                        | Çerçeve açıklıkları | Modül koyulan alan | Dış boyutlar<br>WxHxD | Açıklık boyutları<br>w x h  | Ağırlık | Madde Numarası |
|-------------------------------|---------------------|--------------------|-----------------------|-----------------------------|---------|----------------|
| CSP 32 AISI316 FRAME ASSEMBLY | 4                   | 40 x 80            | 223 x 140 x 63.5      | 201 x 109                   | 2.9     | 233729         |
| CSP 16 AISI316 FRAME ASSEMBLY | 2                   | 40 x 80            | 131 x 140 x 63.5      | 109(+1/-0.5) x 109(+1/-0.5) | 1.8     | 233728         |

## Yalıtım elemanı verileri


### Yalıtım elemanları



Kayganlaştırıcı



Multidiameter™ özellikli HD modül




HD tek parça sıkıştırma modülü

Ayrıntılı bilgi için lütfen [roxtec.com](https://www.roxtec.com) adresini ziyaret edin.



# Önceden yapılandırılmış geçiş kitleri

mm/kg

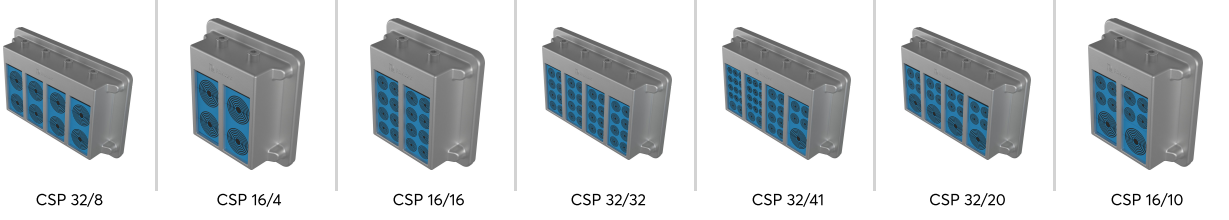

| Başlık    | Konfigürasyon                                | Dış boyutlar<br>WxHxD | Açıklık boyutları<br>w x h | Ağırlık | Madde Numarası |
|-----------|----------------------------------------------|-----------------------|----------------------------|---------|----------------|
| CSP 32/8  | 8x (9.5-31.5)                                | 223 x 140 x 63.5      | 201 x 109                  | 3.1     | 241713         |
| CSP 16/4  | 4x (9.5-31.5)                                | 131 x 140 x 63.5      | 109 x 109                  | 1.8     | 241194         |
| CSP 16/16 | 16x (3.5-15.5)                               | 131 x 140 x 63.5      | 109 x 109                  | 2.1     | 241192         |
| CSP 32/32 | 32x (3.5-15.5)                               | 223 x 140 x 63.5      | 201 x 109                  | 3.6     | 241716         |
| CSP 32/41 | 1x (9.5-31.5), 16x (3.5-15.5), 24x (3.5-9.5) | 223 x 140 x 63.5      | 201 x 109                  | 3.1     | 241718         |
| CSP 32/20 | 4x (9.5-31.5), 16x (3.5-15.5)                | 223 x 140 x 63.5      | 201 x 109                  | 3.7     | 241717         |
| CSP 16/10 | 2x (9.5-31.5), 8x (3.5-15.5)                 | 131 x 140 x 63.5      | 109 x 109                  | 2.1     | 241193         |

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-12-12



Roxtec ® and Multidiameter ®  
are registered trademarks of Roxtec  
in Sweden and/or other countries.