




# Roxtec GOH FL100 transit

Openable transit for existing cables, including a wide flange suitable for bolting to concrete structures.

The Roxtec GOH FL100 is an openable cable and pipe seal that enables installation around already routed services. The rectangular steel frame has a 100mm wide flange with bolt holes close to the outer perimeter to secure a correct fixing and avoid the risk of cracks. The transit is the right choice when bolting to concrete.

- Perfect for retrofit
- Openable

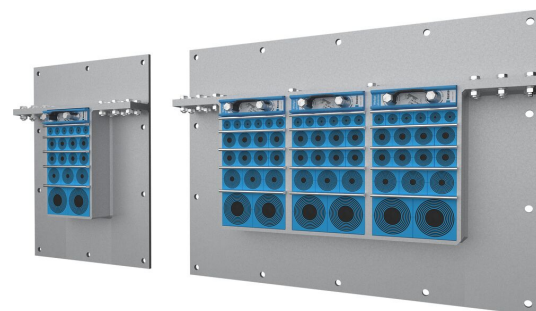

## Product characteristics



Fire rated



IP/UL NEMA

## Structure of installation



Concrete



Brick

## Mounting type



Bolting

## Ratings & certificates

### Fire

- E/EI rating according to EN 13501

### Tightness

- IP 68

## Frame dimensions

mm/kg

The frame variants below are a limited selection. For the full range of frames and configurations, please visit [roxtec.com](https://www.roxtec.com).


| Product               | Frame openings | Packing space | External dimensions<br>WxHxD | Aperture dimensions<br>w x h | Weight | Art. no |
|-----------------------|----------------|---------------|------------------------------|------------------------------|--------|---------|
| GOH 2x1 FL100 AISI316 | 1              | 120 x 60      | 332.5 x 313 x 60             | 148(+5/-5) x 128(+5/-5)      | 7      | 214791  |
| GOH 6x2 FL100 AISI316 | 2              | 120 x 180     | 465 x 430 x 60               | 280(+5/-5) x 245(+5/-5)      | 12     | 164359  |
| GOH 6x3 FL100 AISI316 | 3              | 120 x 180     | 597.5 x 430 x 60             | 413(+5/-5) x 245(+5/-5)      | 14.4   | 157824  |
| GOH 6x4 FL100 AISI316 | 4              | 120 x 180     | 730 x 430 x 60               | 545(+5/-5) x 245(+5/-5)      | 18.7   | 125356  |
| GOH 8x1 FL100 AISI316 | 1              | 120 x 240     | 332.5 x 490 x 60             | 148(+5/-5) x 305(+5/-5)      | 10     | 179208  |
| GOH 8x2 FL100 AISI316 | 2              | 120 x 240     | 465 x 490 x 60               | 280(+5/-5) x 305(+5/-5)      | 13.4   | 110472  |
| GOH 8x3 FL100 AISI316 | 3              | 120 x 240     | 597.5 x 490 x 60             | 413(+5/-5) x 305(+5/-5)      | 16     | 104111  |
| GOH 8x4 FL100 AISI316 | 4              | 120 x 240     | 730 x 490 x 60               | 545(+5/-5) x 305(+5/-5)      | 19.4   | 173441  |
| GOH 2x1 FL100 GALV    | 1              | 120 x 60      | 332.5 x 313 x 60             | 148(+5/-5) x 128(+5/-5)      | 7      | 124009  |
| GOH 2x2 FL100 GALV    | 2              | 120 x 60      | 465 x 313 x 60               | 280(+5/-5) x 128(+5/-5)      | 9.6    | 250893  |
| GOH 2x2 FL100 AISI316 | 2              | 120 x 60      | 465 x 313 x 60               | 280(+5/-5) x 128(+5/-5)      | 9.6    | 250896  |
| GOH 2x3 FL100 GALV    | 3              | 120 x 60      | 597.5 x 313 x 60             | 413(+5/-5) x 128(+5/-5)      | 12.2   | 250894  |
| GOH 2x4 FL100 GALV    | 4              | 120 x 60      | 730 x 313 x 60               | 545(+5/-5) x 128(+5/-5)      | 15     | 179978  |
| GOH 4x1 FL100 GALV    | 1              | 120 x 120     | 332.5 x 371.5 x 60           | 148(+5/-5) x 187(+5/-5)      | 8.1    | 107250  |
| GOH 4x2 FL100 GALV    | 2              | 120 x 120     | 465 x 371.5 x 60             | 280(+5/-5) x 187(+5/-5)      | 11     | 121490  |
| GOH 4x3 FL100 GALV    | 3              | 120 x 120     | 597.5 x 371.5 x 60           | 413(+5/-5) x 187(+5/-5)      | 13.5   | 192221  |
| GOH 4x4 FL100 GALV    | 4              | 120 x 120     | 730 x 371.5 x 60             | 545(+5/-5) x 187(+5/-5)      | 18     | 121489  |
| GOH 6x1 FL100 GALV    | 1              | 120 x 180     | 332.5 x 430 x 60             | 148(+5/-5) x 245(+5/-5)      | 7.4    | 179403  |
| GOH 6x2 FL100 GALV    | 2              | 120 x 180     | 465 x 430 x 60               | 280(+5/-5) x 245(+5/-5)      | 12     | 179416  |
| GOH 6x3 FL100 GALV    | 3              | 120 x 180     | 597.5 x 430 x 60             | 413(+5/-5) x 245(+5/-5)      | 15     | 179976  |
| GOH 6x4 FL100 GALV    | 4              | 120 x 180     | 730 x 430 x 60               | 545(+5/-5) x 245(+5/-5)      | 18     | 119419  |
| GOH 2x3 FL100 AISI316 | 3              | 120 x 60      | 597.5 x 313 x 60             | 413(+5/-5) x 128(+5/-5)      | 12.2   | 250897  |
| GOH 8x1 FL100 GALV    | 1              | 120 x 240     | 332.5 x 490 x 60             | 148(+5/-5) x 305(+5/-5)      | 9      | 151629  |



| Product               | Frame openings | Packing space | External dimensions<br>WxHxD | Aperture dimensions<br>w x h | Weight | Art. no |
|-----------------------|----------------|---------------|------------------------------|------------------------------|--------|---------|
| GOH 8x2 FL100 GALV    | 2              | 120 x 240     | 465 x 490 x 60               | 280(+5/-5) x 305(+5/-5)      | 13     | 150141  |
| GOH 8x3 FL100 GALV    | 3              | 120 x 240     | 597.5 x 490 x 60             | 413(+5/-5) x 305(+5/-5)      | 17     | 155328  |
| GOH 8x4 FL100 GALV    | 4              | 120 x 240     | 730 x 490 x 60               | 545(+5/-5) x 305(+5/-5)      | 20.3   | 121488  |
| GOH 2x4 FL100 AISI316 | 4              | 120 x 60      | 730 x 313 x 60               | 545(+5/-5) x 128(+5/-5)      | 14.9   | 250898  |
| GOH 4x1 FL100 AISI316 | 1              | 120 x 120     | 332.5 x 371.5 x 60           | 148(+5/-5) x 187(+5/-5)      | 7.6    | 152890  |
| GOH 4x2 FL100 AISI316 | 2              | 120 x 120     | 465 x 371.5 x 60             | 280(+5/-5) x 187(+5/-5)      | 10.8   | 215709  |
| GOH 4x3 FL100 AISI316 | 3              | 120 x 120     | 597.5 x 371.5 x 60           | 413(+5/-5) x 187(+5/-5)      | 14     | 215812  |
| GOH 4x4 FL100 AISI316 | 4              | 120 x 120     | 730 x 371.5 x 60             | 545(+5/-5) x 187(+5/-5)      | 16.8   | 227620  |
| GOH 6x1 FL100 AISI316 | 1              | 120 x 180     | 332.5 x 430 x 60             | 148(+5/-5) x 245(+5/-5)      | 8.6    | 157979  |

## Sealing components


### Sealing components



Stayplate




sealing kit



RM solid compensation module



Wedge & Wedge kit



RM module with Multidiameter™



Holder tools



Pre-compression tools



Lubricant

For detailed information, please visit [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-01-13



Roxtec ® and Multidiameter ® are registered trademarks of Roxtec in Sweden and/or other countries.