




Roxtec R tranzit sa SL R za plastične cijevi

Okrugli tranzit za više termoplastičnih cijevi

Roxtec R tranzit za termoplastične cijevi dostupan je u nekoliko veličina kako bi se zadovoljile različite potrebe povezane s omjerom punjenja ili raspoloživošću prostora. Kompresija je integrirana u tranzitni okvir tako da se cijeli kvadratni otvor može konfigurirati s brtvenim modulima. Roxtec SL R čahura pričvršćena je na konstrukciju zavarivanjem.

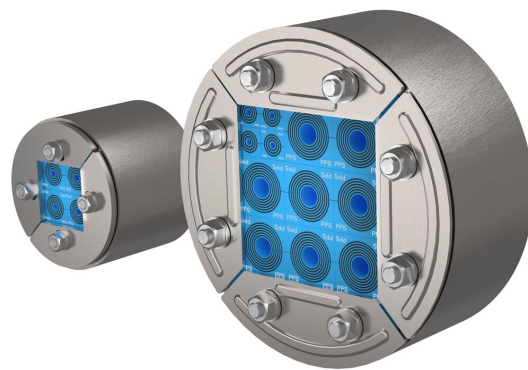

- Površinski učinkovito
- Lako za održavanje i pregledavanje

Karakteristike proizvoda



Vatrootpornost



Vodonepropusno



Plinotjesnost

Struktura instalacije



Metal

Vrsta montaže



Postojeća uvednica



Zavarivanje

Klase i certifikati

Požar

- A-KLASA u skladu s IMO kodeksom 2010 FTP

Nepropusnost

- Plin: 1 bara (katastrofalni)
- Voda: 2 bara (katastrofalni)

Dimenzije okvira

mm/kg


Varijante okvira u nastavku ograničen su izbor. Za cijeli raspon okvira i konfiguracija posjetite [roxtec.com](https://www.roxtec.com).

Proizvod	Prostor za smještaj	Dimenzije otvora Ø	Težina	Broj artikla
R 50 AISI316	30 x 30	50 - 52	0.21	5R00000012875
R 75 AISI316	40 x 40	75 - 77	0.5	R000000751021
R 70 AISI316	40 x 40	70 - 72	0.45	R000000701021
R 100 AISI316	60 x 60	100 - 102	0.8	R000001001021
R 100 GALV	60 x 60	100 - 102	0.8	R000001001018
R 125 AISI316	80 x 80	125 - 127	1.1	R000001251021
R 125 GALV	80 x 80	125 - 127	1.1	R000001251018
R 127 AISI316	80 x 80	127 - 129	1.1	R000001271021
R 127 GALV	80 x 80	127 - 129	1.1	R000001271018
R 150 AISI316	90 x 90	150 - 152	1.6	R000001501021
R 150 GALV	90 x 90	150 - 152	1.6	R000001501018
R 200 AISI316	120 x 120	200 - 202	2.6	R000002001021
R 200 GALV	120 x 120	200 - 202	2.6	R000002001018




Komponente za brtvljenje

Komponente za brtvljenje




Čvrsti modul za kompenzaciju RM



Modul RM sa značajkom Multidiameter™



Mazivo Roxtec



Modul PPS sa značajkom Multidiameter™



Uvodnica SL R

Za detaljne informacije posjetite [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on = 2025-12-05



Roxtec ® and Multidiameter ® are registered trademarks of Roxtec in Sweden and/or other countries.