



Soluția Roxtec SPM™ HT

Etanșare pentru țevi metalice, utilizată în situațiile în care sudura nu este permisă, recomandată sau dorită.

Etanșare pentru țevi metalice, utilizată în situațiile în care sudura nu este permisă, recomandată sau dorită.

Etanșarea Roxtec SPM™ HT (high temperature) este o soluție de trecere fără sudură, ușoară, destinată țevelor metalice individuale care transportă fluide fierbinți la temperaturi de până la 150 °C. Fiind disponibilă în diferite dimensiuni și adaptabilă la diverse diametre de țevi, aceasta acoperă diametre ale țevelor cuprinse între 8 și 56 mm, precum și deschideri neregulate. Etanșarea pentru țevi se montează direct în structuri, fără sudură, și este prevăzută cu indicatori care arată când a fost atins gradul complet de comprimare.



- Cu greutate redusă
- Rapid și ușor de instalat
- Ușor de întreținut și inspectat

Caracteristicile produsului



Certificată la foc

Structura instalației



Metal

Tip de montaj



Gol existent

Clase și certificate

Foc

- CLASA A conform Codului FTP IMO 2010

Date componente de etanșare

Componente de etanșare




Soluția SPM™ HT

Pentru mai multe informații, vă rugăm să vizitați [roxtec.com](https://www.roxtec.com).



Kituri de treceri preconfigurate

mm/kg

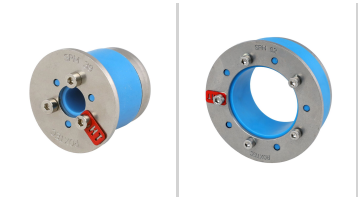

Capacitate (cantitate x dimensiune)	Dimensiuni externe ØxD (mm)	Greutate (kg)	Nr. art.
1x (8.0-12.0)	49 x 44	0.13	167582
1x (12.0-16.0)	51 x 44	0.14	165529
1x (16.0-20.0)	59 x 49	0.2	167584
1x (19.0-23.0)	64 x 49	0.21	165533
1x (24.0-28.0)	69 x 50	0.29	165535
1x (27.0-31.0)	72 x 50	0.3	165537
1x (32.0-36.0)	79 x 50	0.4	165539
1x (37.0-42.0)	88 x 50	0.42	165655
1x (41.4-45.4)	89 x 50	0.43	165527
1x (47.0-51.0)	95 x 50	0.4	165541
1x (52.0-56.0)	100 x 50	0.5	165543

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-09-19